

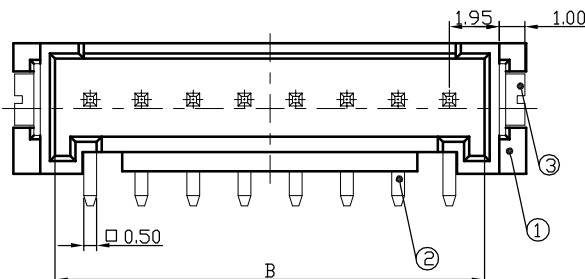


PHB Receptacle + PHB Header



■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ

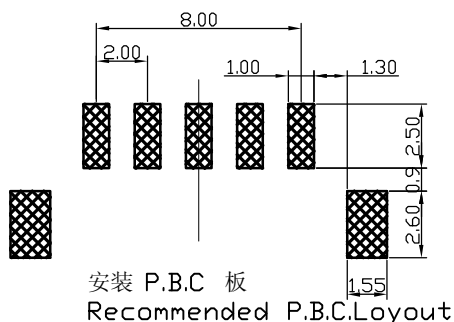

PIN	A	B	C
2	2.0	4.75	8.0
3	4.0	6.75	10.0
4	6.0	8.75	12.0
5	8.0	10.75	14.0
6	10.0	12.75	16.0
7	12.0	14.75	18.0
8	14.0	16.75	20.0
9	16.0	18.75	22.0
10	18.0	20.75	24.0
11	20.0	22.75	26.0
12	22.0	24.75	28.0
13	24.0	26.75	30.0
14	26.0	28.75	32.0
15	28.0	30.75	34.0
16	30.0	32.75	36.0

				TOLERANCE UNLESS OTHERWISE		DRAWN CK tan		XFCN 兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET 1/1	
				X. ±0.30	X° ±5°	CHKD				DATE 2010. 4. 12	
				.X ±0.20	.X° ±2°	APPD		PRODUCT NAME 2.00mm Crimp Style Connectors		UNITS mm	
				.XX ±0.08	.XX° ±1°	VIEW		PART. NO. M2016VS-XX-XX		SCALE 1:1	
AO				.XXX ±0.03	.XXX° ±0.5°	VIEW				DWG. NO. 009	
VER		MODIFICATION		DRAW		DATE					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XFCN](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)