
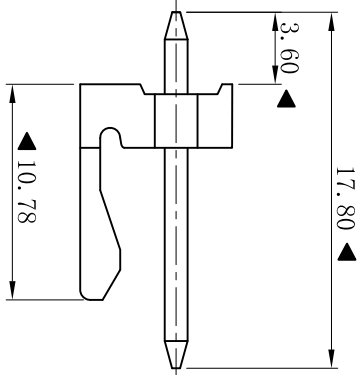
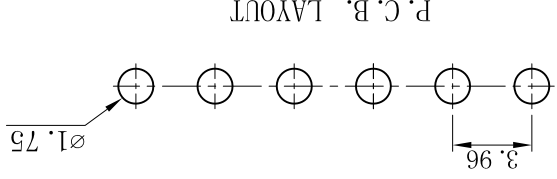
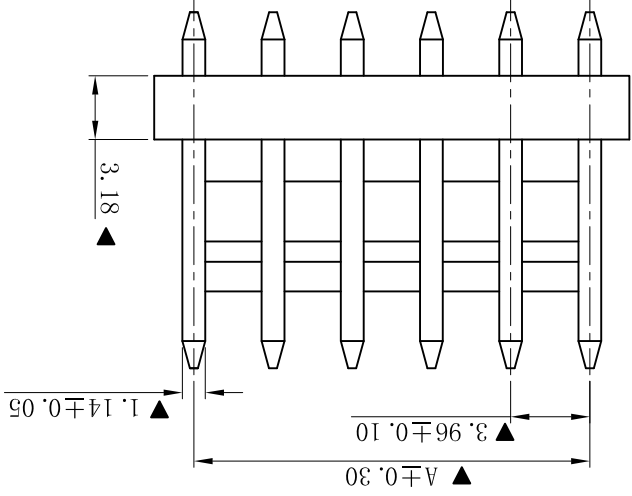


- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max

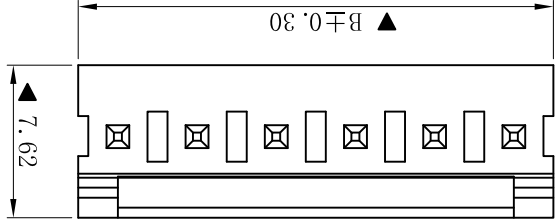

XFCN 飞连接器有限公司

CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME 3.96mm Crimp Style Connectors

PART. NO. M3965V-XX-N0

DWG NO.	009
SCALE	1:1
UNITS	mm
DATE	2010.4.12
SHEET	1/1

TOLERANCE UNLESS OTHERWISE	CK tan
DRAWN	
CHKD	
APPD	
VIEW	
VIEW	

X. \pm 0.30	X. \pm 5 $^{\circ}$
.X \pm 0.20	.X \pm 2 $^{\circ}$
.XX \pm 0.08	.XX \pm 1 $^{\circ}$
.XXX \pm 0.03	.XXX \pm 0.5 $^{\circ}$

VER	A0
MODIFICATION	
DATE	

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

A	B	C	D	E	F	G
---	---	---	---	---	---	---

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XFCN](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)