



环保物料


TEL:0769-82001899

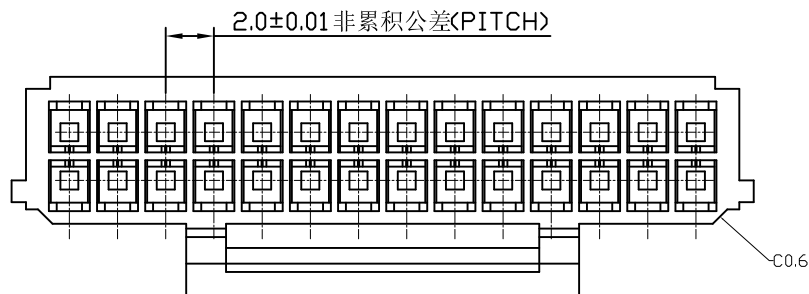

技术参数：  
 额定电流(Current rating) : 3.0A AC/DC  
 额定电压(Voltage rating) : 250V AC/DC  
 工作温度(Working temperature) : -25 °C to +85 °C  
 接触电阻(Contact resistance) : 20M Max.  
 绝缘电阻(Insulation resistance) : 1000M Min  
 耐压值(Withstand voltage) : 1000V AC/minute  
 适用线规(Applicable wire) : AWG#22-28  
 基座(Housing) : Nylon 66 UL94V-0

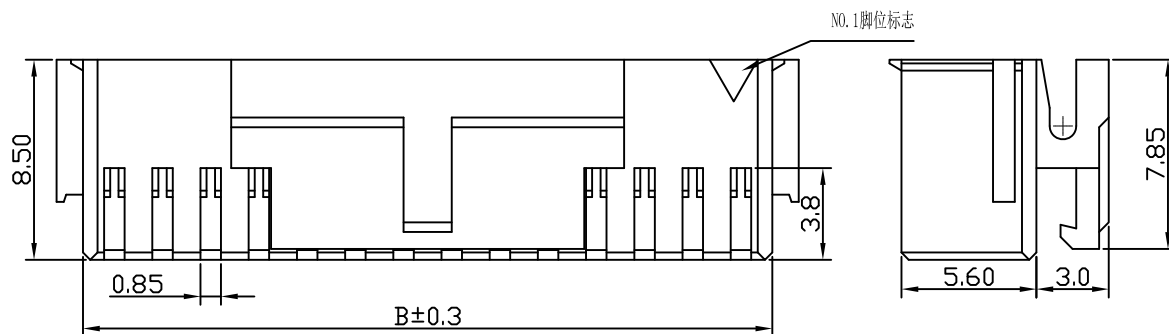

| Circuits | A  | B    | C    |
|----------|----|------|------|
| 2X2      | 2  | 4.6  | 5.6  |
| 2X3      | 4  | 6.6  | 7.6  |
| 2X4      | 6  | 8.6  | 9.6  |
| 2X5      | 8  | 10.6 | 11.6 |
| 2X6      | 10 | 12.6 | 13.6 |
| 2X7      | 12 | 14.6 | 15.6 |
| 2X8      | 14 | 16.6 | 17.6 |
| 2X9      | 16 | 18.6 | 19.6 |
| 2X10     | 18 | 20.6 | 21.6 |
| 2X11     | 20 | 22.6 | 23.6 |
| 2X12     | 22 | 24.6 | 25.6 |
| 2X13     | 24 | 26.6 | 27.6 |
| 2X14     | 26 | 28.6 | 29.6 |
| 2X15     | 28 | 30.6 | 31.6 |
| 2X16     | 30 | 32.6 | 33.6 |
| 2X17     | 32 | 34.6 | 35.6 |
| 2X18     | 34 | 36.6 | 37.6 |
| 2X19     | 36 | 38.6 | 39.6 |
| 2X20     | 38 | 40.6 | 41.6 |

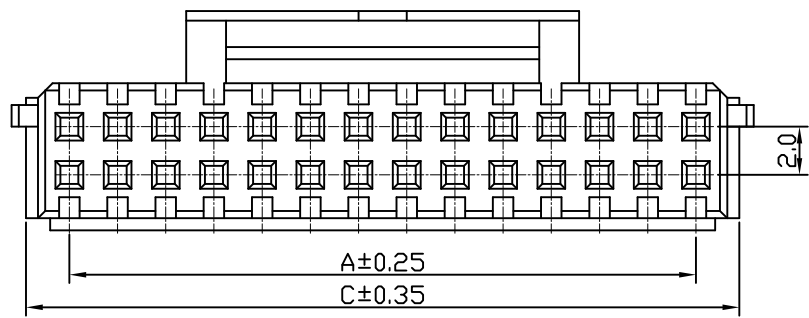

|    |              |  |      |                            |       |       |        |  |              |                               |       |             |
|----|--------------|--|------|----------------------------|-------|-------|--------|--|--------------|-------------------------------|-------|-------------|
|    |              |  |      | TOLERANCE UNLESS OTHERWISE |       | DRAWN | CK tan | <b>XFCN兴飞连接器有限公司</b><br>CONNECTORS XFCN CONNECTORS CO., LTD. |              | SHEET                         | 1/1   |             |
|    |              |  |      | X.                         | ±0.30 | X°    | ±5°    |  |              | CHKD                          | DATE  | 2010. 4. 12 |
|    |              |  |      | .X                         | ±0.20 | .X°   | ±2°    | APPD   | PRODUCT NAME | 2.00mm Crimp Style Connectors |       |             |
|    |              |  |      | .XX                        | ±0.08 | .XX°  | ±1°    | VIEW   | PART. NO.    | P2026-XX-N0                   | UNITS | mm          |
|    |              |  |      | .XXX                       | ±0.03 | .XXX° | ±0.5°  |  |              |                               | SCALE | 1:1         |
| A0 | MODIFICATION |  | DRAW | DATE                       |       |       |        |  |              |                               |       |             |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XFCN](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)