





环保物料

TEL:0769-82001899

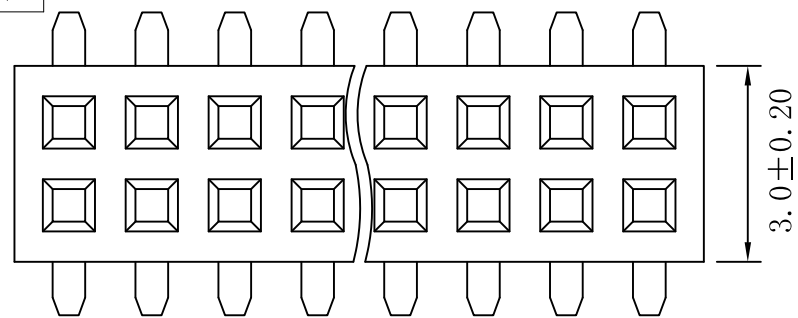

SPECIFICATION

- \*Current Rating :1A
- \*Insulator Resistance :1000 MΩ Min.
- \*Contact Resistance :20 mΩ Max.
- \*Dielectric With Standing:AC 500V
- \*Operating Temperature :-40℃ To +105℃
- \*Contact Material :C5191
- \*Insulator Material :Polyester, UL94V-0
- \* Standard :PA9T
- \*Finish :Gold Flash All Over Nickel

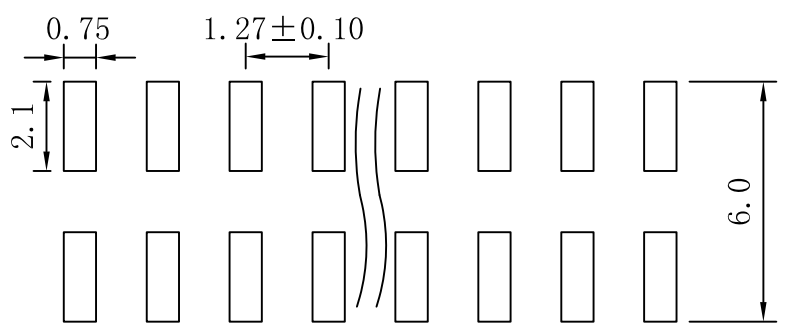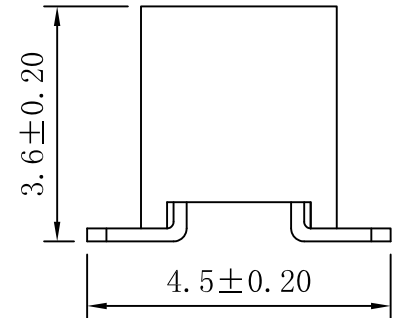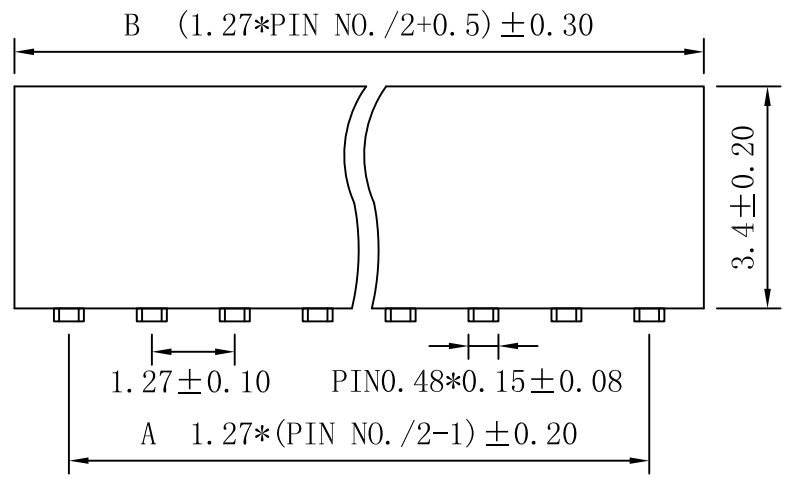

Recommended P.C.B Layout

PIN NO.	DIMENSION	
	A	B
2*2	1.27	3.04
2*3	2.54	4.31
2*4	3.81	5.58
2*5	5.08	6.85
2*6	6.35	8.12
2*7	7.62	9.39
2*8	8.89	10.66
⋮	⋮	⋮
2*50	62.23	64.0

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	<b>XFCN</b> 兴飞连接器有限公司 XFCN CONNECTORS CO.,LTD.	SHEET	1/1	
				X.	±0.30	X°	±5°		CHKD	DATE	2020.04.12
				.X	±0.20	.X°	±2°		APPD	UNITS	mm
				.XX	±0.08	.XX°	±1°		VIEW	SCALE	1:1
				.XXX	±0.03	.XXX°	±0.5°		PRODUCT NAME	1.27mm Female Header Connectors	
AO	MODIFICATION	DRAW	DATE			PART. NO.	PM127VS-12-xx-H34-4.5-R	DWG. NO.	009		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XFCN](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [00-9021-0611-00-339](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#)  
[70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#)  
[FCN-367T-T012/H](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)  
[803-41-018-10-001000](#)