
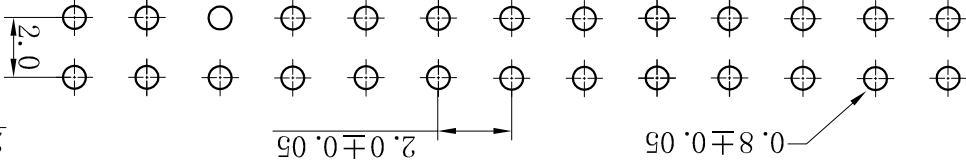
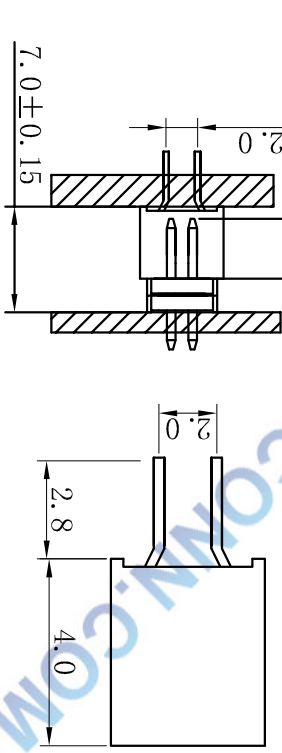
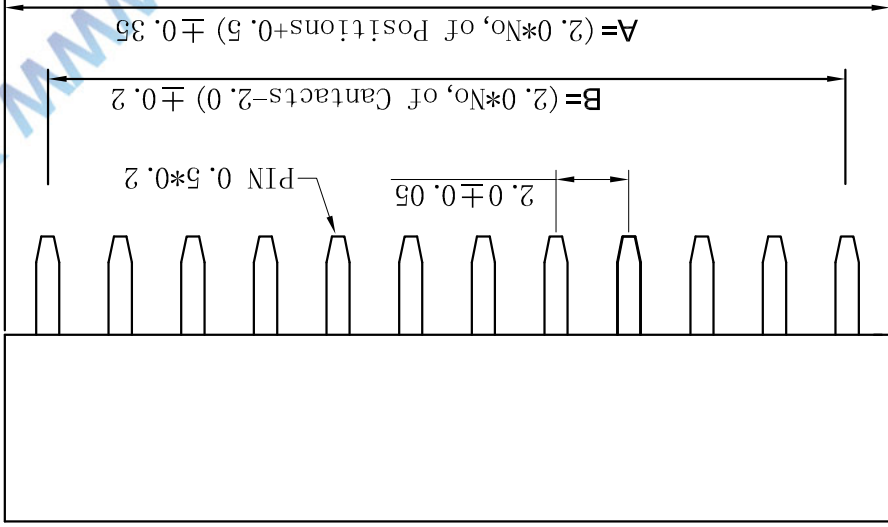


SPECIFICATIONS

Current Rating: 2amps
 Insulator resistance: 5000 Megohms min.
 Dielectric Withstaanding: AC 500V
 Operating Temperature: $-40^{\circ}\sim+105^{\circ}\text{C}$
 Max Processing Temp: 230° for 30~60 seconds
 Contact Material: Brass
 Insulator Material: NY-6T
 PLATING: GOLD FLASH
 UNSPECIFIED TOLERANCE: ± 0.20

Dimensions list

Part No.	Dimensions		Part No.	Dimensions	
	A	B		A	B
2*1	2.0	42.0	2*21	0	42.0
2*2	4.0	44.0	2*22	2.0	44.0
2*3	6.0	46.0	2*23	4.0	46.0
2*4	8.0	48.0	2*24	6.0	48.0
2*5	10.0	50.0	2*25	8.0	50.0
2*6	12.0	52.0	2*26	10.0	52.0
2*7	14.0	54.0	2*27	12.0	54.0
2*8	16.0	56.0	2*28	14.0	56.0
2*9	18.0	58.0	2*29	16.0	58.0
2*10	20.5	60.0	2*30	18.0	60.0
2*11	22.0	62.0	2*31	20.0	62.0
2*12	24.0	64.0	2*32	22.0	64.0
2*13	26.0	66.0	2*33	24.0	66.0
2*14	28.0	68.0	2*34	26.0	68.0
2*15	30.0	70.0	2*35	28.0	70.0
2*16	32.0	72.0	2*36	30.0	72.0
2*17	34.0	74.0	2*37	32.0	74.0
2*18	36.0	76.0	2*38	34.0	76.0
2*19	38.0	78.0	2*39	36.0	78.0
2*20	40.0	80.0	2*40	38.0	80.0

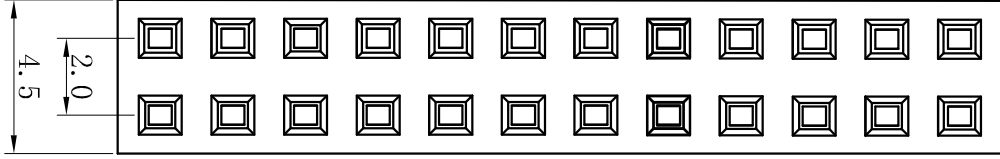

VER	MODIFICATION		DATE	XXX	±0.03	.XXX	±0.5°	VIEW	Φ	PART. NO.	PM200V-12-xx-H40	DWG NO.	009
A0				.XX	±0.08	.XX	±1°	APPD		PRODUCT NAME	2.00mm Female Header Connectors	SCALE	1:1
				.X	±0.20	.X	±2°	CHKD		CONNECTORS XFCN CONNECTORS CO., LTD.	UNITS	mm	
				X	±0.30	X	±5°	DRAWN	CK tan	XFCN 兴 飞连接器有限公司	DATE	2010.4.12	
				TOLERANCE UNLESS OTHERWISE									
				DRAWN									
				SHEET									
				1/1									

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XFCN](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)