
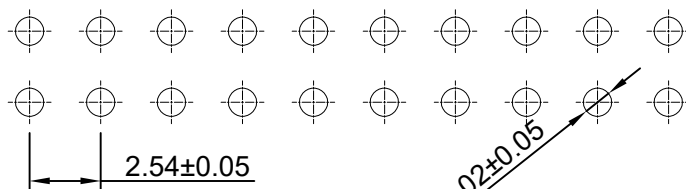
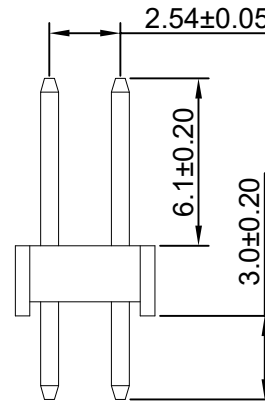
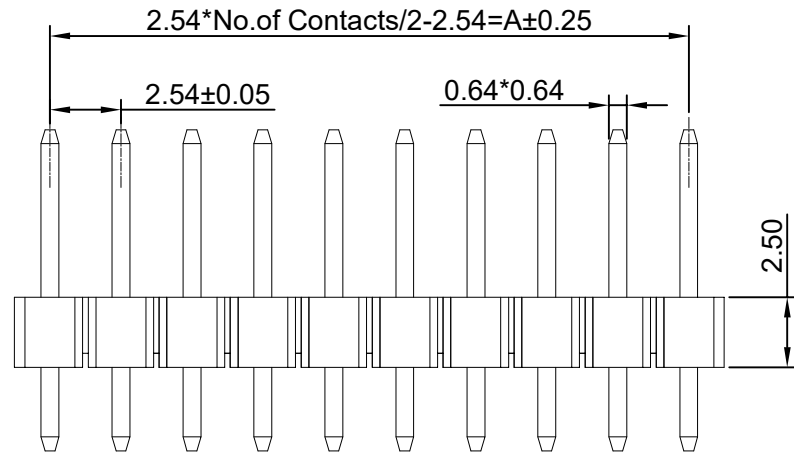


RoHS

| REV | ECN NO. | DESCRIPTION | DESIGN | APPROVAL | DATE |
|-----|---------|-------------|--------|----------|------------|
| A1 | NEW | 更换图框 | | | 2024.05.24 |

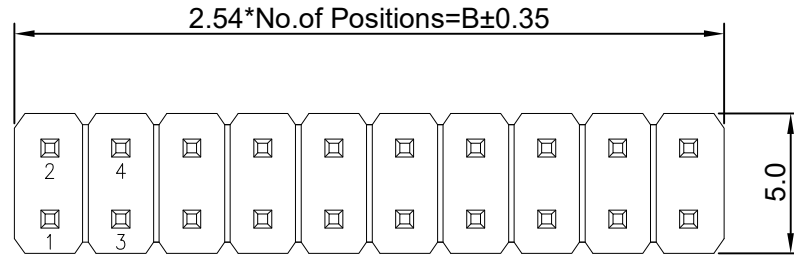

P.C.B Hole Layout

SPECIFICATIONS

- Current rating: 3A
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 600V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator Material: PA6T (UL 94V-0) Black
 Contact Material: Brass
 Plating: Matte Tin or gold plated over Nickel
 Mate with XFCN PM254 Double Row series

Ordering Code:

PZ254V-12-XX
 1 2

- 序列号
- Pin位数: 2x2=04P
2x10=20P
2x20=40P

| No. of PIN/ROW | Dimension | |
|----------------|-----------|--------|
| | A | B |
| 2x02 | 2.54 | 5.08 |
| 2x03 | 5.08 | 7.62 |
| 2x04 | 7.62 | 10.16 |
| 2x05 | 10.16 | 12.70 |
| 2x06 | 12.70 | 15.24 |
| 2x07 | 15.24 | 17.78 |
| 2x08 | 17.78 | 20.32 |
| 2x09 | 20.32 | 22.86 |
| 2x10 | 22.86 | 25.40 |
| 2x11 | 25.40 | 27.94 |
| 2x12 | 27.94 | 30.48 |
| 2x13 | 30.48 | 33.02 |
| 2x14 | 33.02 | 35.56 |
| 2x15 | 35.56 | 38.10 |
| 2x16 | 38.10 | 40.64 |
| 2x17 | 40.64 | 43.18 |
| 2x18 | 43.18 | 45.72 |
| 2x19 | 45.72 | 48.26 |
| 2x20 | 48.26 | 50.80 |
| 2x21 | 50.80 | 53.34 |
| 2x22 | 53.34 | 55.88 |
| 2x23 | 55.88 | 58.42 |
| 2x24 | 58.42 | 60.96 |
| 2x25 | 60.96 | 63.50 |
| 2x26 | 63.50 | 66.04 |
| 2x27 | 66.04 | 68.58 |
| 2x28 | 68.58 | 71.12 |
| 2x29 | 71.12 | 73.66 |
| 2x30 | 73.66 | 76.20 |
| 2x31 | 76.20 | 78.74 |
| 2x32 | 78.74 | 81.28 |
| 2x33 | 81.28 | 83.82 |
| 2x34 | 83.82 | 86.36 |
| 2x35 | 86.36 | 88.90 |
| 2x36 | 88.90 | 91.44 |
| 2x37 | 91.44 | 93.98 |
| 2x38 | 93.98 | 96.52 |
| 2x39 | 96.52 | 99.06 |
| 2x40 | 99.06 | 101.60 |

| | | | | | | |
|--|--------|--------------------------|-------------------|-------|--|---------------|
| X.±0.50 | X.°± | PART NO: PZ254V-12-XX | XFCN 兴飞连接器 | | | |
| .X±0.25 | .X°± | | | | TITLE: 2.54mm Pin Header Connectors | 0769-82001899 |
| .XX±0.15 | .XX°± | | | | www.xfconn.com | |
| .XXX±0.10 | .XXX°± | | | | DWG NO: | |
| UNITS: | mm | APPD | Chen ZhiQiang | VIEW | ⊕ □ | |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN | | CHKD | Liu Wei | SCALE | SHEET | |
| | | DRAW | Chen HongJiang | SCALE | REV | |
| | | DATE | 2024.06.04 | NONE | 1/1 | A1 |
| | | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XFCN](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-](#)
[002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#) [820-22-008-30-001101](#)
[821-22-002-10-001101](#) [821-22-003-10-002101](#)