
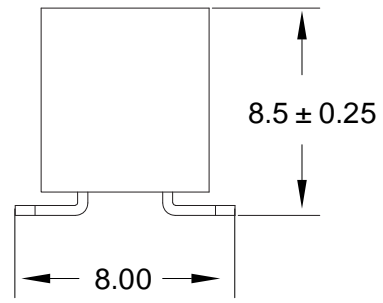
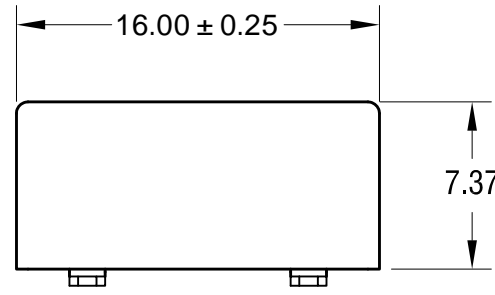


RoHS


REV.	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2023.09.05

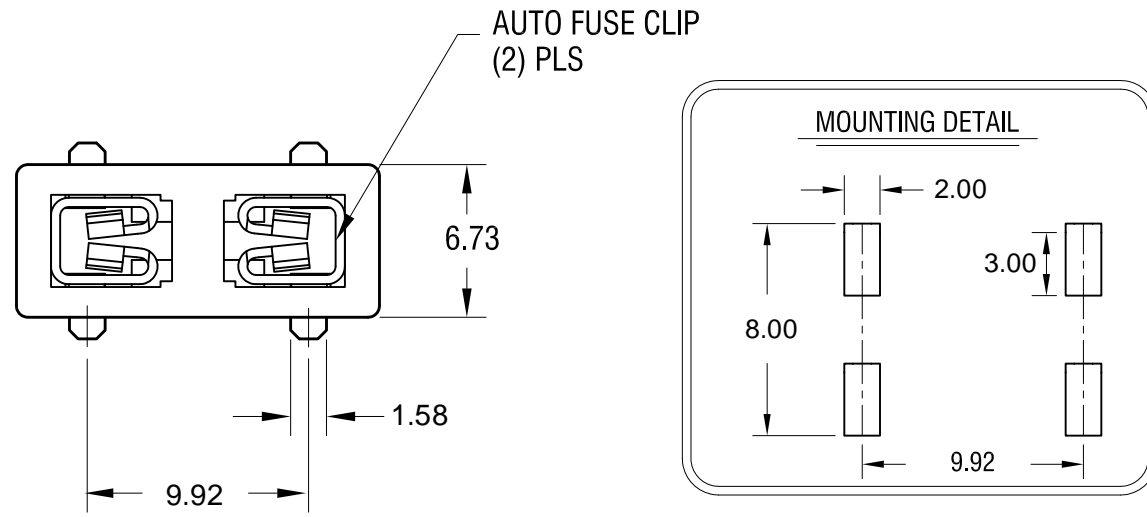

**Product Characteristics**

<b>Blocks and Clips for Blade Fuses</b>	
<b>Compatible Fuses</b>	Automotive Blade Fuses
<b>Electrical Specifications</b>	Rated Voltage: 500 V
	Rated Current: From 15 to 30 A
<b>Molded Parts</b>	Insulation Block: Black Thermoplastic PET (UL94 V-0) and PA66 (UL94 V-0)
<b>Metal Parts</b>	PCB Terminals: Tin Plated Cu Alloy
<b>Electrical</b>	Insulation Resistance: 10,000 Megaohm Minimum at 500 VDC
	Contact Resistance: ≤ 5 mΩ Maximum
<b>Ambient Temperature</b>	-40 °C to 125 °C

ACTUAL SIZE



X.±0.50	X.°±	PART NO.: XF-508PVS-B	<b>XFCN</b> 兴飞连接器		
.X±0.25	.X°±				
.XX± 0.15	.XX°±				
.XXX±0.10	.XXX°±				
UNITS:	mm	TITLE: SMT MINI AUTO FUSE HOLDER	0769-82001899		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD:	www.xfconn.com		
		CHKD:	DWG NO: /		
		DRAW: Tong.Deng	2023.09.05		SCALE
			NONE	1/1	A1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuse Holder](#) category:*

*Click to view products by [XFCN](#) manufacturer:*

Other Similar products are found below :

[570-290-741P40](#) [0031.1351.01](#) [6R30A1B](#) [6SC30A2IC](#) [F30A3S](#) [F600A3B](#) [80910030](#) [80910080](#) [9-3557-GP REV A](#) [R6J30A3S](#) [HFH-1](#)  
[RF30A1S](#) [RF30A2B](#) [RF30A3SP](#) [15600-08-10](#) [HTJ-LES-FUSE](#) [2193](#) [RTMF-SC](#) [2602](#) [2650](#) [F60A2SQ](#) [FHN31G1](#) [T30A2B](#) [G4PB8](#) [2660](#)  
[HKP-CCHH](#) [R6F30A2S](#) [341001A](#) [345621A](#) [348670](#) [CVRMCC](#) [4202](#) [4408](#) [4423](#) [4532](#) [4537](#) [TSD1404-12](#) [HPC](#) [55900008011](#) [345602-010](#)  
[345603-010](#) [345612](#) [345903A](#) [3571](#) [3578](#) [3833-5](#) [3833-7](#) [3992](#) [4393](#) [4409](#)