

## FEATURES


- Low dissipation factor
- High insulation resistance
- High stability of capacitance and DF versus temperature and frequency
- Self-healing properties
- Non-inductive





## CHARACTERISTICS

Item	Characteristics
Operating Temperature Range	-40°C ~ +85°C
Capacitance Tolerance	±5%, ±10%, ±20%
Standard Working Voltage (WV)	250, 400, 630
Dissipation Factor	0.1% max. (1KHz), 25°C
Insulation Resistance	≤.1μF is >30,000MΩ; >.1μF is >3000MΩ per μF


## PART NUMBERING SYSTEM

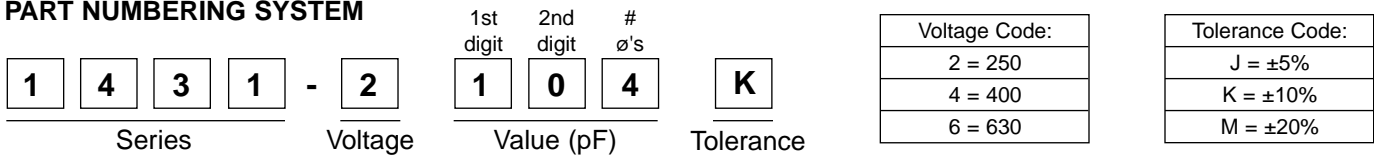

## TYPICAL PERFORMANCE CHARACTERISTICS

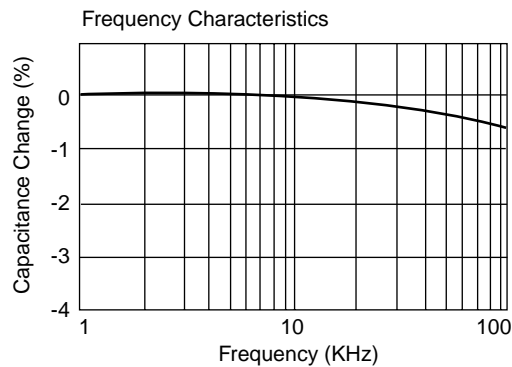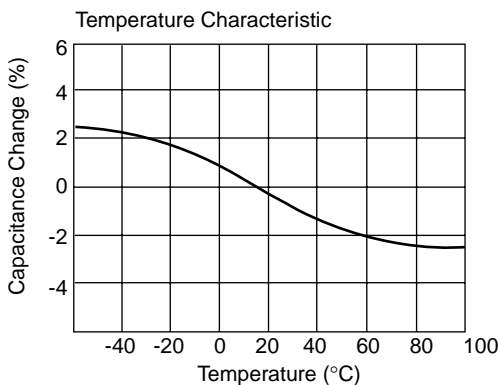

## ■ DIMENSIONS

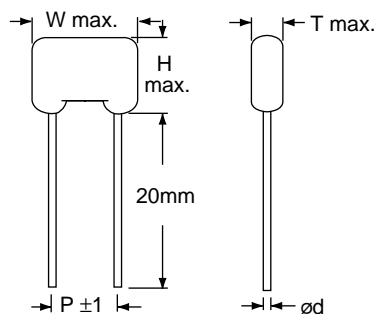

Value ( $\mu\text{F}$ )	Working Voltage (WV); Dimensions (mm)								
	250			400			630		
	W x H x T	P	$\varnothing d$	W x H x T	P	$\varnothing d$	W x H x T	P	$\varnothing d$
.001	10.5 x 9.5 x 6.0	7	0.6	14.0 x 8.5 x 5.5	10	0.6	14.0 x 8.5 x 6.0	10	0.6
.0015	10.5 x 9.5 x 6.0	7	0.6	14.0 x 9.5 x 6.0	10	0.6	14.0 x 9.0 x 6.5	10	0.6
.0022	10.5 x 9.5 x 6.0	7	0.6	14.0 x 9.5 x 6.0	10	0.6	14.0 x 10.0 x 6.5	10	0.6
.0033	10.5 x 9.5 x 6.0	7	0.6	14.0 x 9.5 x 6.0	10	0.6	14.0 x 12.0 x 6.5	10	0.6
.0047	10.5 x 9.5 x 6.0	7	0.6	14.0 x 9.5 x 6.0	10	0.6	14.0 x 13.0 x 7.5	10	0.6
.0068	14.0 x 9.5 x 6.0	10	0.6	14.0 x 10.0 x 6.5	10	0.6	19.0 x 12.5 x 7.5	15	0.8
.01	14.0 x 9.5 x 6.0	10	0.6	14.0 x 11.5 x 7.5	10	0.6	19.0 x 12.5 x 8.0	15	0.8
.015	14.0 x 10.0 x 6.5	10	0.6	14.0 x 13.0 x 8.0	10	0.6	19.0 x 14.5 x 8.5	15	0.8
.022	14.0 x 12.0 x 7.0	10	0.6	19.0 x 12.0 x 7.5	15	0.6	19.0 x 16.5 x 9.0	15	0.8
.033	19.0 x 11.5 x 6.5	15	0.6	19.0 x 14.0 x 8.5	15	0.6	26.0 x 18.0 x 11.0	22	0.8
.047	19.0 x 12.5 x 7.0	15	0.6	19.0 x 15.5 x 9.5	15	0.8	26.0 x 18.5 x 11.5	22	0.8
.068	19.0 x 13.0 x 7.5	15	0.8	26.0 x 16.5 x 9.0	22	0.8	31.0 x 19.0 x 11.0	27.5	0.8
.1	19.0 x 16.0 x 9.5	15	0.8	26.0 x 18.5 x 11.0	22	0.8	31.0 x 21.5 x 12.5	27.5	0.8
.15	26.0 x 17.5 x 10.0	21	0.8	26.0 x 21.0 x 14.0	22	0.8	32.0 x 25.5 x 15.5	27.5	0.8
.22	26.0 x 21.0 x 12.5	21	0.8	32.0 x 22.0 x 14.5	27.5	0.8	32.0 x 27.5 x 16.0	27.5	0.8
.33	32.0 x 22.5 x 13.0	27.5	0.8	32.0 x 26.0 x 18.5	27.5	0.8			
.47	32.0 x 26.0 x 15.5	27.5	0.8	32.0 x 28.0 x 20.5	27.5	0.8			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Film Capacitors](#) category:*

*Click to view products by [Xicon](#) manufacturer:*

Other Similar products are found below :

[F450KG153J250ALH0J](#) [750-1018](#) [FKP1-1000160010P15](#) [FKP1-1500160010P15](#) [82EC1100DQ50K](#) [MMWAF150KME](#)  
[PFR5101J100J11L16.5TA18](#) [PME261JB5220KR19T0](#) [A521HH333M035C](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [QXM2G104K](#) [DMT2P22](#)  
[EEC2G505HQA406](#) [B32520C6332K000](#) [B32522C6104K000](#) [B32523Q3155J](#) [B32676E6755K](#) [C3B2AD44400B20K](#) [217-0716-001](#) [KP1830-](#)  
[247/061-G](#) [SCD105K122A3-22](#) [2N3155](#) [F601BL225K063CL60A](#) [FKP1-2202KV5P15](#) [FKS3-680040010P10](#) [445450-1](#) [B32523Q0475K000](#)  
[46KR415050M1K](#) [4BSNBX4100ZBFJ](#) [4DCNAQ4450ZA0J](#) [MKP383510063JKP2T0](#) [MKT 1813-368-015](#) [MKT182022263473](#) [WMC08P22](#)  
[WMF1S15](#) [WMF4S68](#) [EEC2E106HQA405](#) [EEC2G805HQA415](#) [82DC3100DQ50J](#) [82DC4100AA60K](#) [82EC2150DQ50K](#) [WMF4D68](#)  
[WMF1D68](#) [PHE841ED6150MR17T0](#) [B25620B118K883](#) [B25620B158K883](#) [66MD2100CK7AK](#) [97F8038](#) [NRM-S225K250F](#)