

FH3204G

N-Channel Enhancement Mode Power MOSFET

Description

The FH3204G uses advanced Shielded Gate trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications.


General Features

V _{DSS}	I _D	R _{DS(ON)} (MAX)
40V	120A	1.6mΩ@VGS=10V

Application

- Motor drivers
- Power switching application
- DC/DC Converters In Computing
- Isolated DC/DC Converters In Telecom and Industrial


- High density cell design for ultra low Rdson
- Fully characterized avalanche voltage and current
- Good stability and uniformity with high E_{AS}
- Excellent package for good heat dissipation



Schematic diagram



Marking and pin Assignment

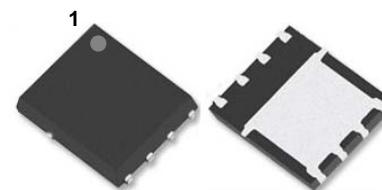

PDFN5X6-8L top and bottom view

Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V _{DS}	Drain-Source Voltage	T _C = 25 °C	-	40	V
V _{GS}	Gate-Source Voltage	T _C = 25 °C	-	± 20	V
I _D *	Drain Current	T _C = 25 °C, V _{GS} = 10 V	-	120	A
I _{DM} ****	Pulsed Source Current	T _C = 25 °C, V _{GS} = 10 V	-	320	A
P _{tot} *	Total Power Dissipation	T _C = 25 °C	-	35	W
T _{stg}	Storage Temperature		55	150	°C
T _J	Junction Temperature		-	150	°C
I _S	Diode Forward Current	T _C = 25 °C	-	120	A
R _{θJA} *	Thermal Resistance- Junction to Ambient		-	62.5	°C / W
R _{θJC} *	Thermal Resistance- Junction to Case		-	3.5	°C / W

Notes :

* Surface Mounted on 1 in² pad area, t ≤ 10 sec

** Pulse width ≤ 10 μs, duty cycle ≤ 1 %

*** limited by bonding wire

Electrical Characteristics ($T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}$, $I_D = 250 \mu\text{A}$	40	-	-	V
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$, $I_{DS} = 250 \mu\text{A}$	1.5	2.0	2.5	V
I_{DSS}	Zero Gate Voltage Source Current	$V_{DS} = 32 \text{ V}$, $V_{GS} = 0 \text{ V}$ $T_J = 85^\circ\text{C}$	-	-	1	μA
I_{GSS}	Gate Leakage Current	$V_{GS} = \pm 20 \text{ V}$, $V_{DS} = 0 \text{ V}$	-	-	± 100	nA
$R_{DS(\text{ON})}^a$	Drain-Source On-State Resistance	$V_{GS} = 10 \text{ V}$, $I_D = 20 \text{ A}$	-	1.2	1.6	$\text{m}\Omega$
		$V_{GS} = 4.5 \text{ V}$, $I_D = 10 \text{ A}$	-	1.9	2.5	
Diode Characteristics						
V_{SD}^a	Diode Forward Voltage	$I_{SD} = 20 \text{ A}$, $V_{GS} = 0 \text{ V}$	-	-	1.3	V
t_{rr}	Reverse Recovery Time	$I_{SD} = 20 \text{ A}$, $dI_{SD}/dt = 100 \text{ A}/\mu\text{s}$	-	68	-	ns
Q_{rr}	Reverse Recovery Charge		-	92	-	nC
Dynamic Characteristics^b						
C_{iss}	Input Capacitance	$V_{GS} = 0 \text{ V}$, $V_{DS} = 20 \text{ V}$ Frequency = 1 MHz	-	4925	-	pF
C_{oss}	Output Capacitance		-	1655	-	
C_{rss}	Reverse Transfer Capacitance		-	122	-	
$t_d(\text{on})$	Turn-on Delay Time	$V_{DS} = 20 \text{ V}$, $V_{GEN} = 10 \text{ V}$, $R_G = 4.5 \Omega$, $R_L = 1 \Omega$, $I_{DS} = 20 \text{ A}$	-	16	-	ns
t_r	Turn-on Rise Time		-	48	-	
$t_d(\text{off})$	Turn-off Delay Time		-	75	-	
t_f	Turn-off Fall Time		-	42	-	
Gate Charge Characteristics^b						
Q_g	Total Gate Charge	$V_{DS} = 20 \text{ V}$, $V_{GS} = 10 \text{ V}$, $I_{DS} = 20 \text{ A}$	-	81	-	nC
Q_{gs}	Gate-Source Charge		-	18	-	
Q_{gd}	Gate-Drain Charge		-	15	-	





Notes :

a : Pulse test ; pulse width $\leq 300 \mu\text{s}$, duty cycle $\leq 2\%$





b : Guaranteed by design, not subject to production testing

NHCX defines "Green" as lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900 ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500 ppm by weight; Follow IEC 61249-2-21 and IPC / JEDEC J-STD-020C)

Typical Characteristics (Cont.)

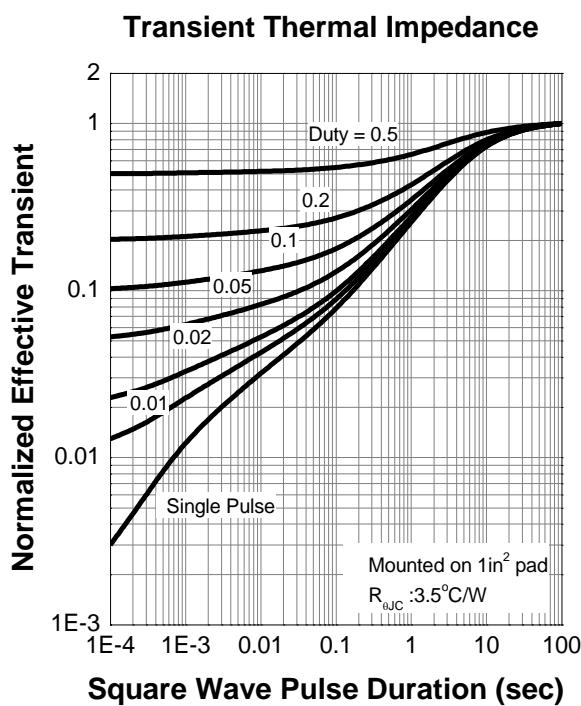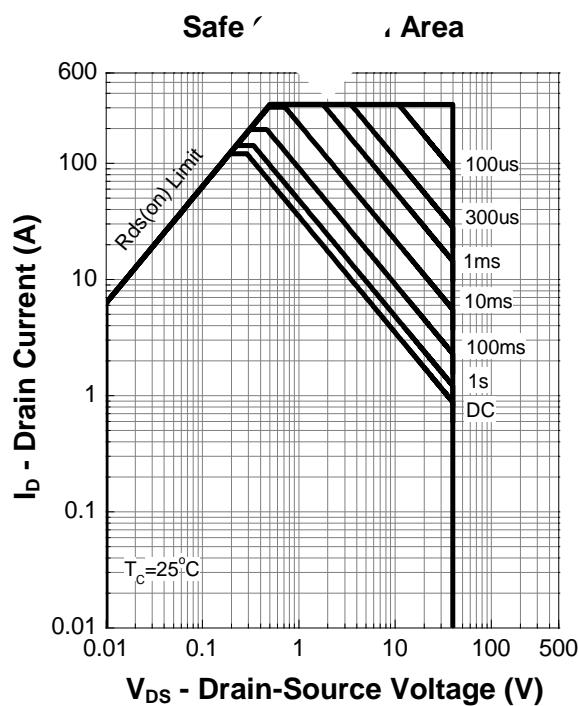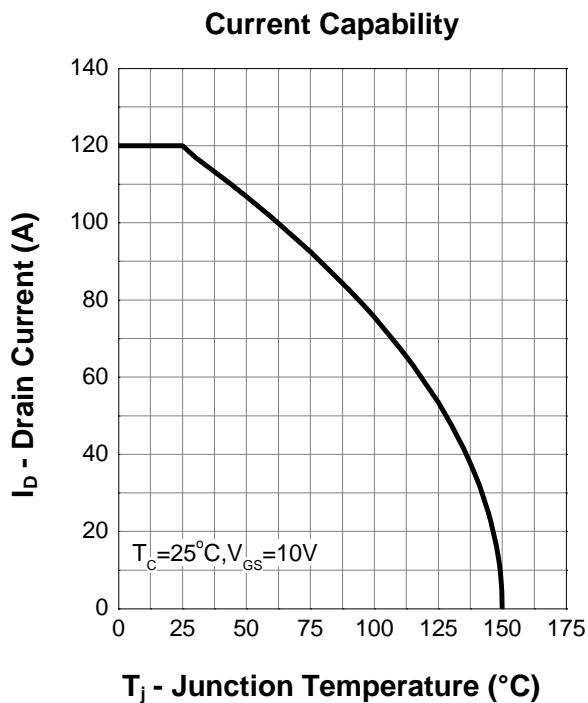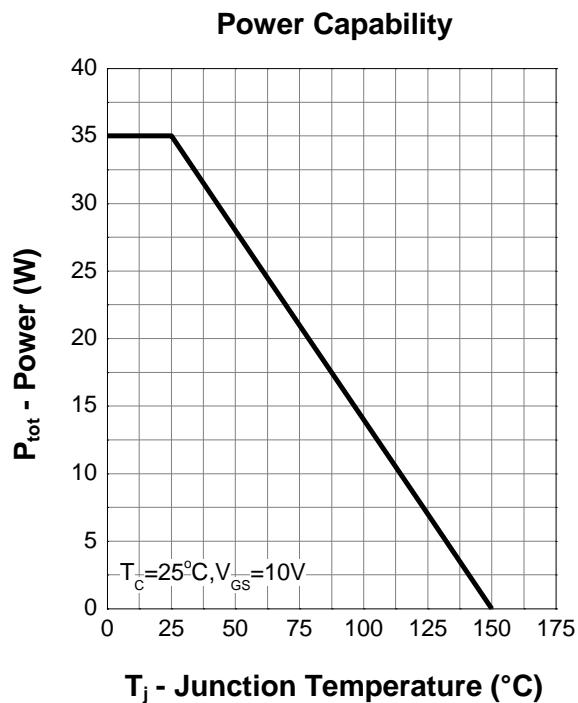


Typical Characteristics (Cont.)

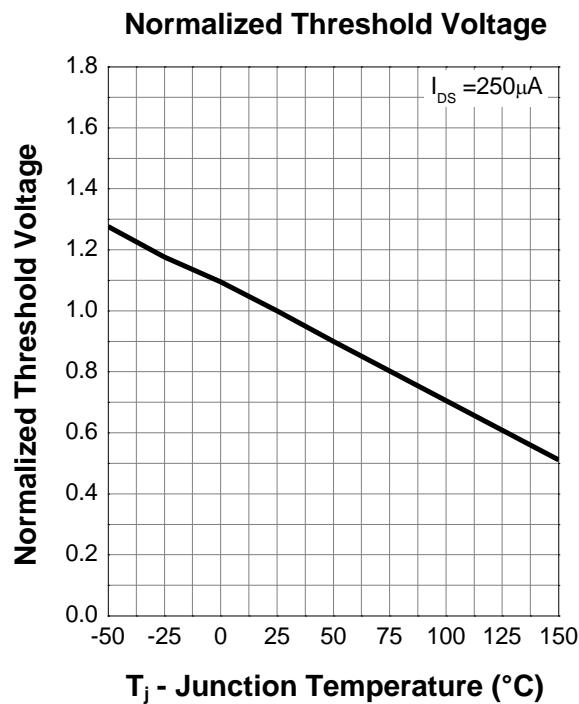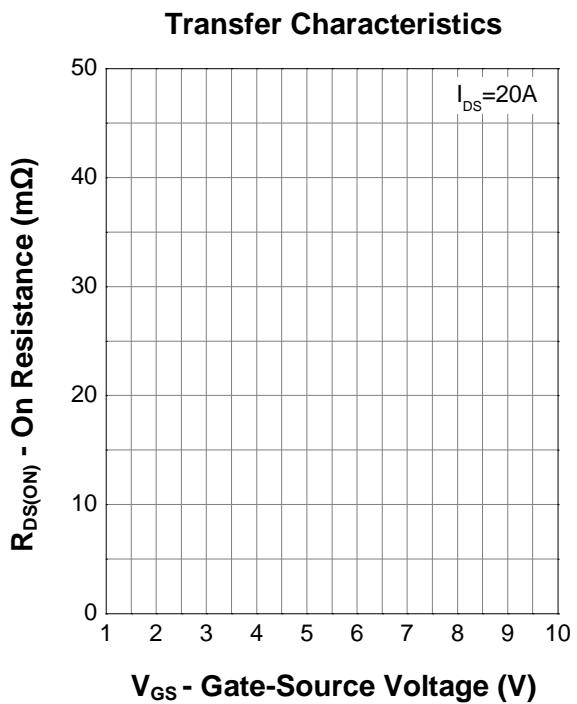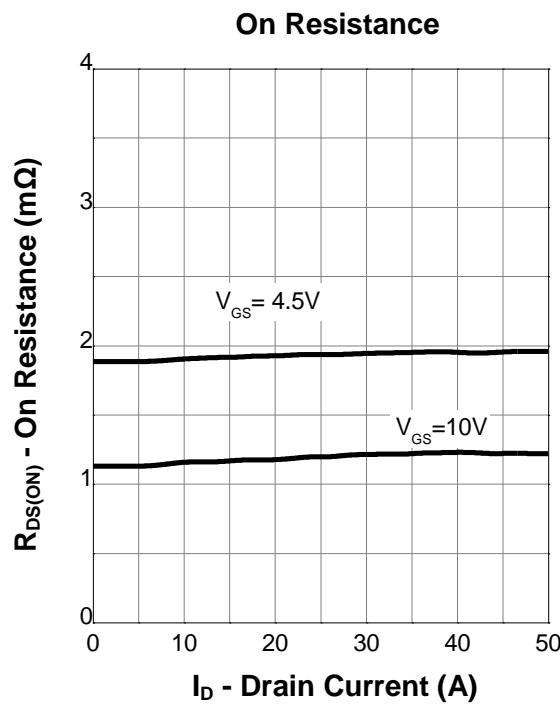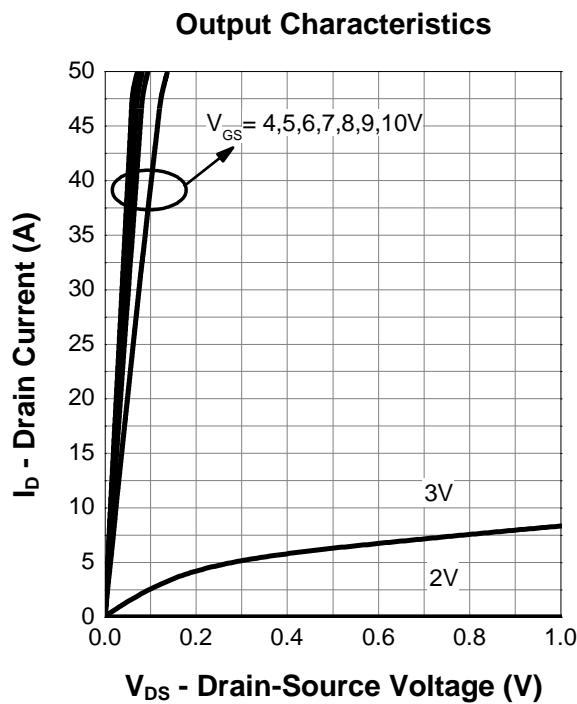


Typical Characteristics (Cont.)


Normalized On Resistance

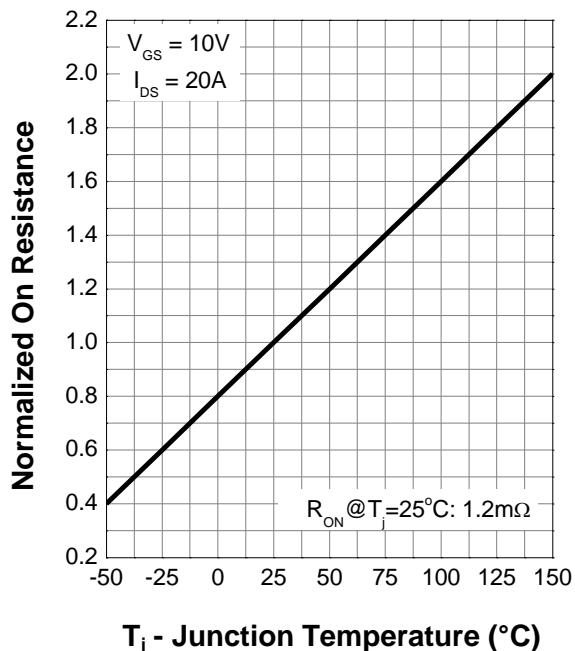


Diode Forward Current

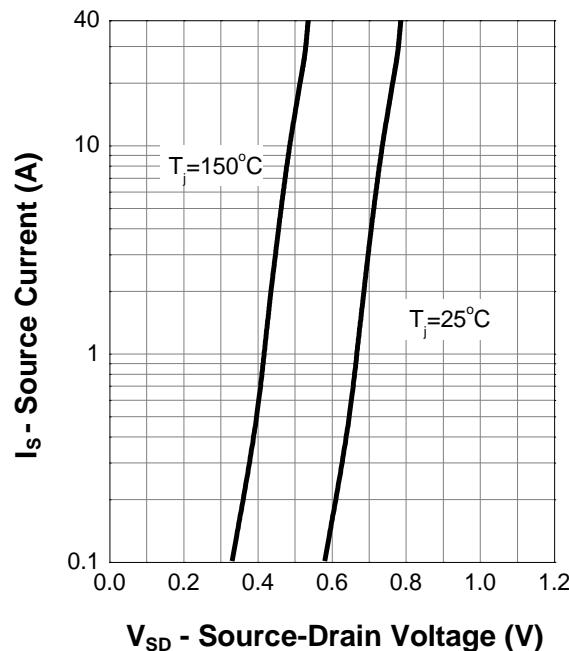


Capacitance

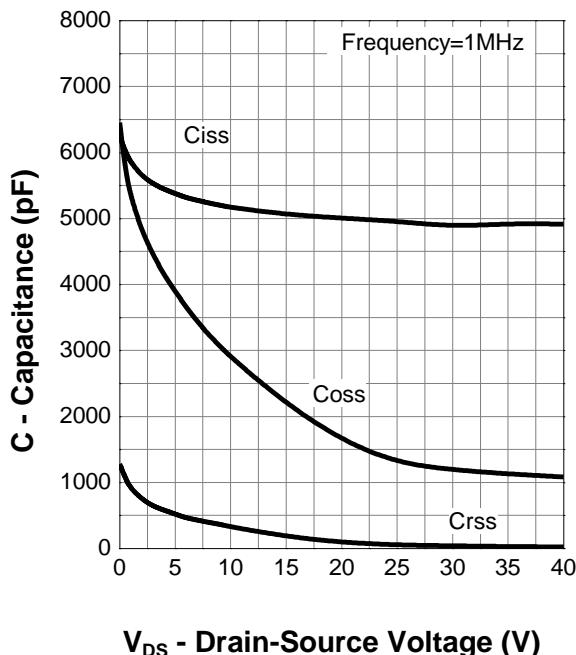

Gate Charge

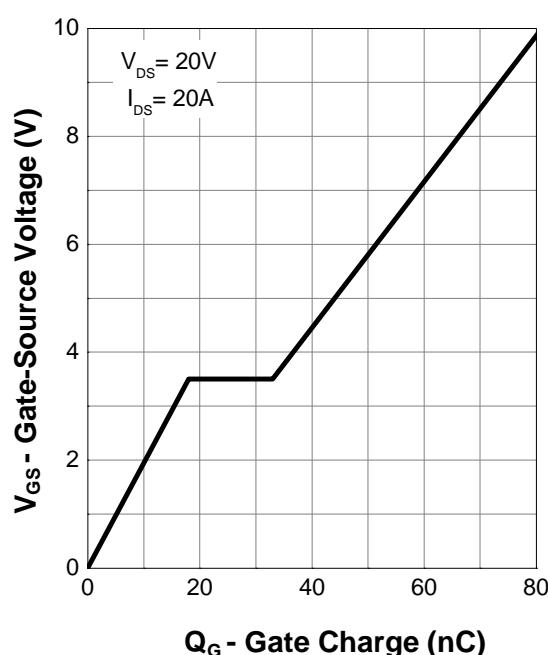

Package Dimensions : PDFN5x6-8L

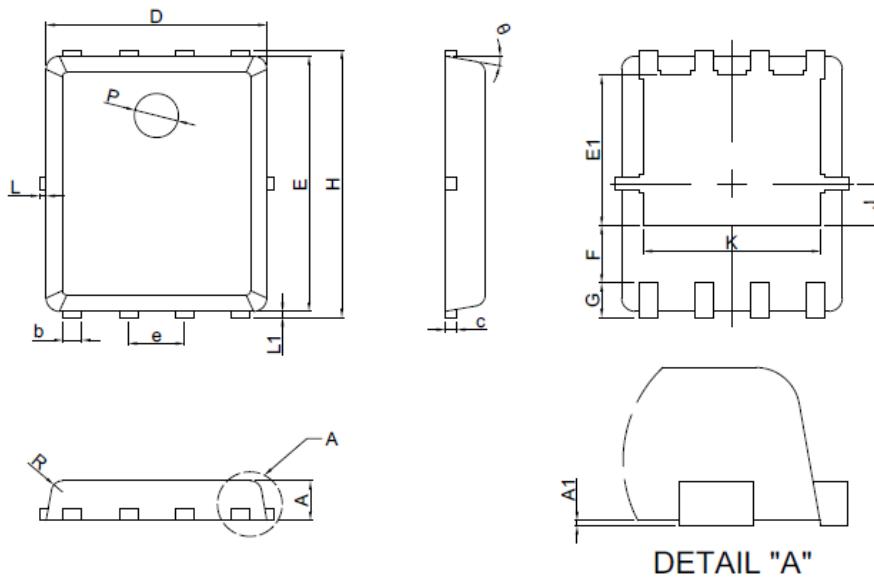

Symbol	Dimensions In Millimeters	
	MIN.	MAX.
A	0.80	1.00
A1	0.00	0.05
b	0.35	0.49
c	0.254REF	
D	4.90	5.10
F	1.40REF	
E	5.70	5.90
e	1.27BSC	
H	5.95	6.20
L1	0.10	0.18
G	0.60REF	
K	4.00REF	
L	-	0.15
J	0.95BSC	
P	1.00REF	
E1	3.40REF	
θ	6°	14°
R	0.25REF	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Xinfeihong manufacturer:

Other Similar products are found below :

[MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [NTNS3A92PZT5G](#) [IRFD120](#) [JANTX2N5237](#) [2N7000](#) [2SK2464-TL-E](#) [AOD464](#) [2SJ277-DL-E](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#) [IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [BSF024N03LT3 G](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [IPSA70R950CEAKMA1](#) [IPSA70R2K0CEAKMA1](#) [STU5N65M6](#) [C3M0021120D](#) [DMN6022SSD-13](#)