

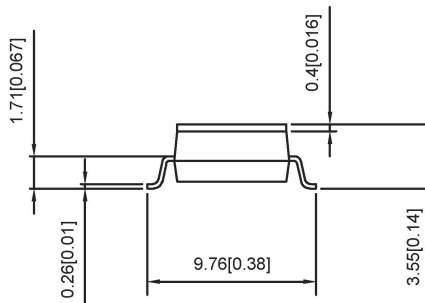


Projection(P)

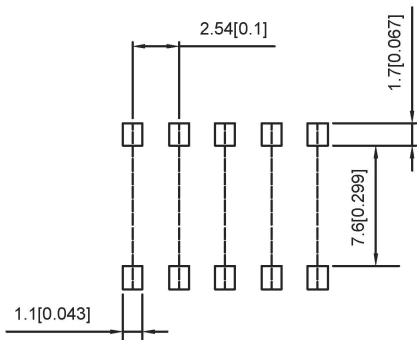

Short(S)

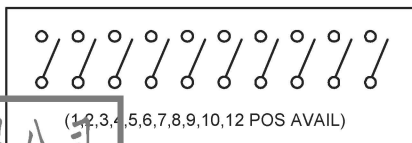

| PART NO. | NO.OFPOS | DIM.A | DIM.B | Projection(P) | Short(S)   |
|----------|----------|-------|-------|---------------|------------|
| DSIC01LS | 1        | 2.54  |       | DSIC01LS-P    | DSIC01LS-S |
| DSIC02LS | 2        | 5.08  | 2.54  | DSIC02LS-P    | DSIC02LS-S |
| DSIC03LS | 3        | 7.62  | 5.08  | DSIC03LS-P    | DSIC03LS-S |
| DSIC04LS | 4        | 10.16 | 7.62  | DSIC04LS-P    | DSIC04LS-S |
| DSIC05LS | 5        | 12.7  | 10.16 | DSIC05LS-P    | DSIC05LS-S |
| DSIC06LS | 6        | 15.24 | 12.7  | DSIC06LS-P    | DSIC06LS-S |
| DSIC07LS | 7        | 17.78 | 15.24 | DSIC07LS-P    | DSIC07LS-S |
| DSIC08LS | 8        | 20.32 | 17.78 | DSIC08LS-P    | DSIC08LS-S |
| DSIC09LS | 9        | 22.86 | 20.32 | DSIC09LS-P    | DSIC09LS-S |
| DSIC10LS | 10       | 25.4  | 22.86 | DSIC10LS-P    | DSIC10LS-S |
| DSIC12LS | 12       | 30.48 | 27.94 | DSIC12LS-P    | DSIC12LS-S |

SPECIFICATION

Contact Rating: 25mA,24V DC  
 Contact Resistance: 50mΩ max  
 Insulation Resistance: 100mΩ min.500V DC  
 Dielectric Strength: 500V AC/1minute  
 Operating Force: 1000gf max  
 Travel: 1.0mm  
 Operating Life: 3000cycles  
 Operating Temp: -20℃~+70℃  
 Storage Temp: -30℃~+80℃

| ITEM | PAPT NAMF | QTY | MATERIAL     | FINISHING                        |
|------|-----------|-----|--------------|----------------------------------|
| 4    | Terminal  |     | Copper Alloy | T: Tin plated<br>G: Plating Gold |
| 3    | Base      | 1   | Pa9t         | white                            |
| 2    | Keystake  | 1   | Pa66         | white                            |
| 1    | Cover     | 1   | Pa66         | Black                            |

广东星坤科技股份有限公司

生效日期

文件工程章

REVISIONS

www.helloxkb.com www.helloxkb.com www.helloxkb.com

units: mm  
 tolerance:  
 X.X ±0.2mm  
 X.XX ±0.1mm  
 X.XXX ±0.05mm

UNSPECIFIED TOLERANCES

|                                       |      |             |                        |
|---------------------------------------|------|-------------|------------------------|
| DSND                                  | DATE | SCALE: N/A  | MODEL TYPE: DIP SWITCH |
| DWN                                   | DATE | VIEW:       | PART NO.:              |
| CHKD                                  | DATE | UNIT: mm/in | DWG NO.: DSICXXLS-X    |
| APPD                                  | DATE | SIZE: A4    | WEIGHT: 1.0g           |
| XKB INDUSTRIAL PRECISION CO., LIMITED |      |             | SHEET: 1/1             |
|                                       |      |             | REVISION: A0           |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIP Switches/SIP Switches](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [DRS4016](#) [1825444-1](#) [193005MS](#) [195010MS](#) [200183](#) [206002](#) [208004](#) [208007ST](#) [208008](#)  
[25.350.0653.0](#) [SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE12S04](#) [206005RAS](#) [206007](#) [209005LPST](#) [2-1825058-8](#) [219002LPST](#)  
[219002MSTJRF](#) [219012MST](#) [25.352.0353.0](#) [CXDRIVEV2X](#) [LA2-002-DC24](#) [DSR02T](#) [193004MS](#) [E2FMX2D1M1TGJ03M](#) [NDI10H](#) [219-](#)  
[9MSTP](#) [219008LPSTR](#) [EPM02FV](#) [206010RAST](#) [76SB05](#) [TD06H0SK1](#) [Z7.255.9027.0](#) [1-1825058-3](#) [1825428-4](#) [219-10LPSTF](#)  
[E3ZG6111D03M](#) [G4D212PUSTV2DC5](#) [HARW0002](#) [EPG301BT06](#) [1-1825058-6](#) [E3TSL23M5J03M](#) [Y5795](#) [7R0060](#)