
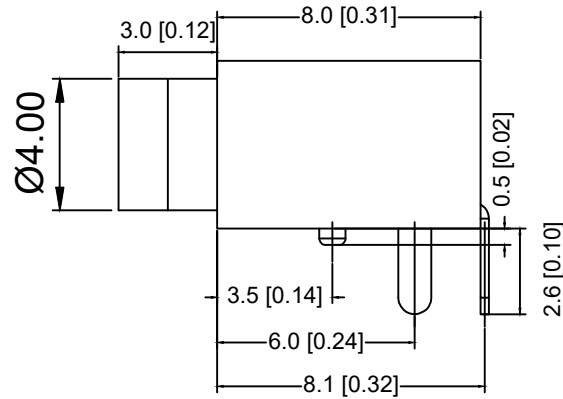


Ø2.6±0.05

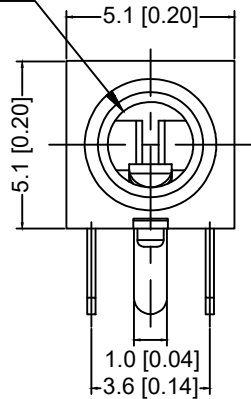




NOTES:

1.ELECTRICALCHARACTERS:

- 1-1.RATING:DC 30V 0.5A:
- 1-2.CONTATCT RESISTANCE:<30mΩ;
- 1-3.INSULATION RESISTANCE:>100MΩ DC500V;
- 1-4.WITHSTANDING VOLTAGE:AC 500V 1min;
- 1-5.LIFE:5.000CYCLES:

2.MECHANICALCHARACTERISTICS:

- 2-1.INSERTION&EXTRACTION FORCE:3~30N:
- 2-2.OPERATINC TEMPERATURE:-30°C~+70°C:

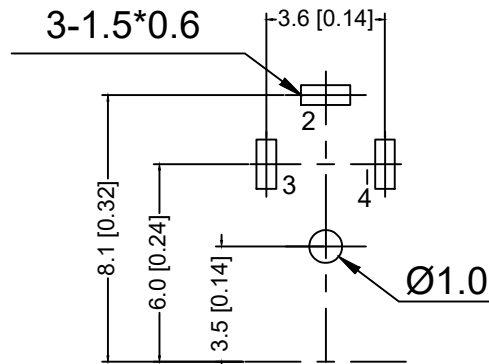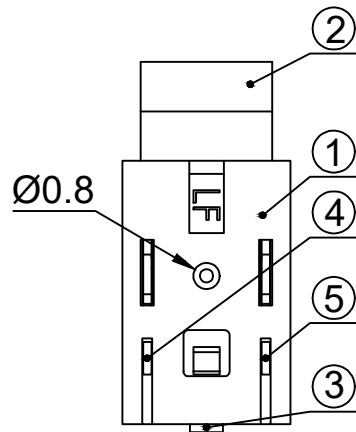

PCB HOLES(TOP VIEW)
GENERAL TOLERANCE:0.1MM

⑤	TERMINAL	4	1	Manganese steel t=0.25	SnSb	PLATED
④	TERMINAL	3	1	Manganese steel t=0.25	SnSb	PLATED
③	TERMINAL	2	1	Manganese steel t=0.25	SnSb	PLATED
②	AXLE SLEEVE		1	H59	CuSn	PLATED
①	HOUSING		1	PA66		BLACK

					ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK			
Δx					L ≤ 4	±0.2	DWN		DATE		VIEW:	PART NO.:			
Δx					4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm/in	DWG NO.:			
Δx					16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4	PJ-210A			
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5						WEIGHT	SHEET	REVISION	
					UNSPECIFIED TOLERANCES		KXB INDUSTRIAL PRECISION CO.,LIMITED					1.0g	1/1	A0	
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn															

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[30-1231](#) [30-528](#) [30-504](#) [30-519](#) [33DVIR-24S1B](#) [47648-2000](#) [2002-400](#) [TC142X](#) [769-103/021-000](#) [1932649-1](#) [CP30200GM3](#) [67881](#)
[HBLBH](#) [HBLBI](#) [HAFBG](#) [HAFBH](#) [HAGBF](#) [HAGBG](#) [HAGBJ](#) [HBLBJ](#) [AABIE](#) [AABIF](#) [AABIG](#) [AABIH](#) [AABIJ](#) [AABIK](#) [AACBE](#)
[AACBF](#) [AACBG](#) [ABIBF](#) [ABIBG](#) [ABIBH](#) [AACBH](#) [AACBI](#) [AACBJ](#) [AACBK](#) [AACBL](#) [AAIBD](#) [AAIBF](#) [AAIBI](#) [AANBJ](#) [AAQBH](#)
[AAQBI](#) [AARBG](#) [AARBH](#) [AARBI](#) [AAXBD](#) [ABA AF](#) [ABBBF](#) [AIDB0](#)