
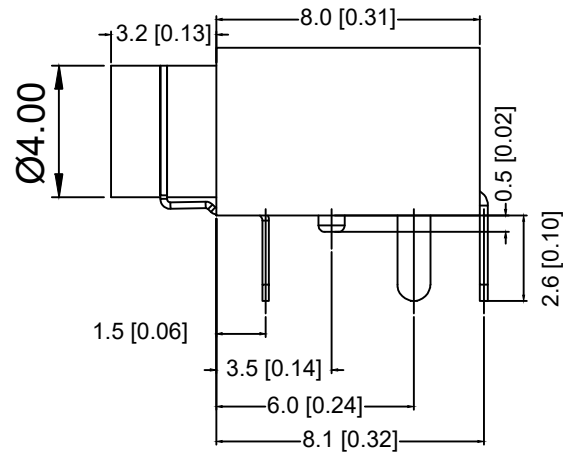



Ø2.6±0.05





NOTES:

1. ELECTRICAL CHARACTERS:


- 1-1. RATING: DC 30V 0.5A;
- 1-2. CONTACT RESISTANCE: <30mΩ;
- 1-3. INSULATION RESISTANCE: >100MΩ DC500V;
- 1-4. WITHSTANDING VOLTAGE: AC 500V 1min;
- 1-5. LIFE: 5.000CYCLES;

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION & EXTRACTION FORCE: 3~30N;
- 2-2. OPERATING TEMPERATURE: -30°C~+70°C;

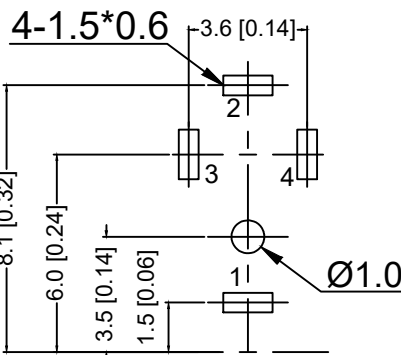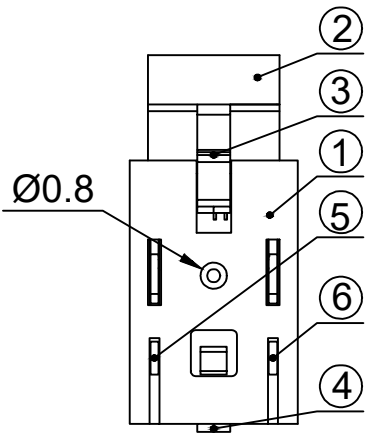

PCB HOLES(TOP VIEW)  
GENERAL TOLERANCE:0.1MM



5	TERMINAL	4	1	Manganese steel t=0.25	SnSb	PLATED
4	TERMINAL	3	1	Manganese steel t=0.25	SnSb	PLATED
3	TERMINAL	2	1	Manganese steel t=0.25	SnSb	PLATED
2	AXLE SLEEVE	1	1	H59	CuSn	PLATED
1	HOUSING	1	1	PA66		BLACK

					DSND		DATE		SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK		
					DWN		DATE		VIEW:	PART NO.:		
					CHKD		DATE		UNIT: mm/in	DWG NO.:		
					APPD		DATE		SIZE: A4	PJ-210B		
REVISIONS					UNSPECIFIED TOLERANCES					WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					XKB INDUSTRIAL PRECISION CO., LIMITED					1.0g	1/1	A0

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[30-1231](#) [30-528](#) [30-504](#) [30-519](#) [33DVIR-24S1B](#) [47648-2000](#) [2002-400](#) [TC142X](#) [769-103/021-000](#) [1932649-1](#) [CP30200GM3](#) [67881](#)  
[HBLBH](#) [HBLBI](#) [HAFBG](#) [HAFBH](#) [HAGBF](#) [HAGBG](#) [HAGBJ](#) [HBLBJ](#) [AABIE](#) [AABIF](#) [AABIG](#) [AABIH](#) [AABIJ](#) [AABIK](#) [AACBE](#)  
[AACBF](#) [AACBG](#) [ABIBF](#) [ABIBG](#) [ABIBH](#) [AACBH](#) [AACBI](#) [AACBJ](#) [AACBK](#) [AACBL](#) [AAIBD](#) [AAIBF](#) [AAIBI](#) [AANBJ](#) [AAQBH](#)  
[AAQBI](#) [AARBG](#) [AARBH](#) [AARBI](#) [AAXBD](#) [ABA AF](#) [ABBBF](#) [AIDB0](#)