

SPECIFICATION

1.Rating: DC 30V 0.5A;

2.Contact resistance: ≤0.03Ω;


3.Insulation resistance: ≥100MΩ (DC250V);

4. Withstand voltage: 500VAC;


5.Insertion and extraction force:3-20N;

6.life test: 5,000 cycles.

SCHEMATIC



| | MATERIAL | PLATING |
|------------|-----------------|---------|
| terminal 1 | Phosphor Bronze | tin |
| terminal 2 | Phosphor Bronze | tin |
| terminal 3 | Brass | tin |
| terminal 4 | Brass | tin |
| terminal 5 | Phosphor Bronze | tin |
| plastic | Pbt | |

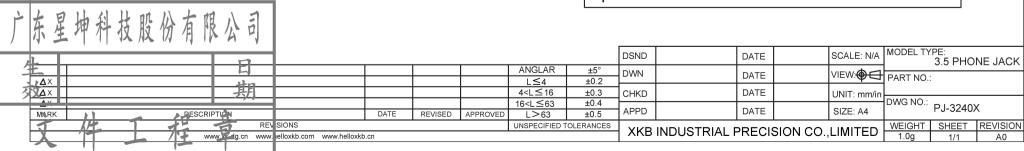

5.20 [0.205]

4.60 [0.181]

-3-(1.5X0.8)

2.60 [0.103]

13.00 [0.512]

1.70 [0.067]

4.20 [0.166]

4.10 [0.161]

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for HDMI, Displayport & DVI Connectors category:

Click to view products by XKB manufacturer:

Other Similar products are found below:

30-1231 30-528 30-504 30-519 33DVIR-24S1B 47648-2000 2002-400 TC142X 769-103/021-000 1932649-1 CP30200GM3 67881

HAFBF HBLBI HAFBG HAGBF HAGBG HAGBI HBLBJ AABIE AABIF AABIH AABII AABIJ AABIK AACBG ABIBF ABIBG

ABIBH ACEBO AACBK AACBL AAIBF AAIBI AANBF AANBG AANBI AANBJ AAQBH AAQBI AARBG AAXBD ABAAF

ABBBF AIKBO AIPBO AIRBO CC-HDMIL-1.8M HBLBG 49883