
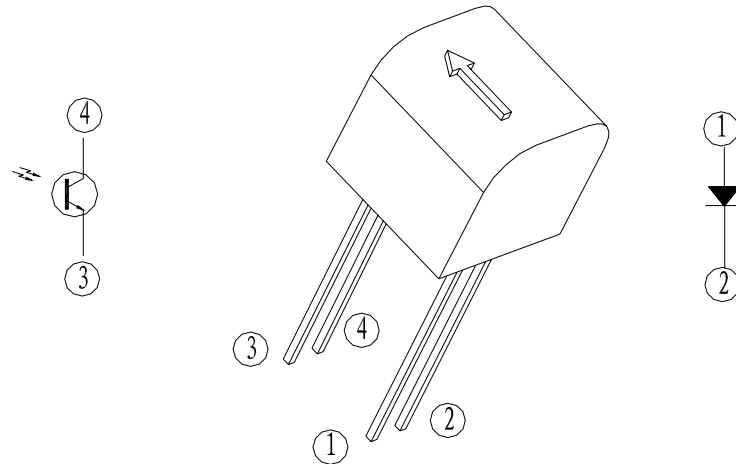


电器性能规格 Electrical Characteristics:
 工作电压operating voltage : 1.5~6V
 工作电流operating current : < 10MA
 工作温度Working temperature : -10~75
 开路电阻Open circuit resistance : > 10M ohm
 闭路电阻Closed circuit resistance : < 10 ohm
 导通时间Conduction time : > 2ms
 操作寿命operating life : 200,000 times

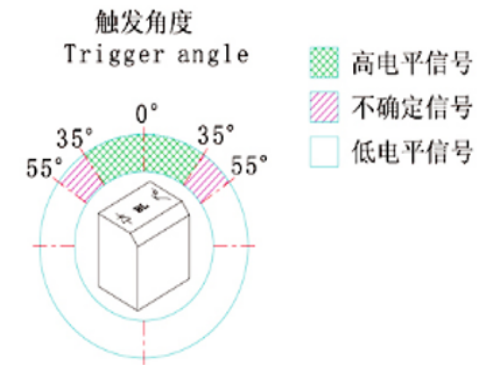

6	红外线对射管	二极管	2
5	仓盖	黄铜, 镀镍	1
4	仓体	黄铜, 镀镍	1
3	胶盖	PA66	1
2	胶芯	PA66	1
1	滚珠	黄铜, 镀镍	1
序号	零件名称	材质	数量

					units: mm	DSND	DATE	SCALE: N/A	MODEL TYPE: Vibration transducer
ΔX					tolerance:	DWN	DATE	VIEW:	PART NO.:
ΔX					X.X ±0.2mm	CHKD	DATE	UNIT: mm/in	DWG NO.:
ΔX					X.XX ±0.1mm	APPD	DATE	SIZE: A4	SR-0609-07
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm	UNSPECIFIED TOLERANCES			WEIGHT
REVISIONS						XKB INDUSTRIAL PRECISION CO., LIMITED			SHEET
www.helloxb.com www.helloxb.cn									1.0g
									1/1
									REVISION
									A0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optical Switches, Reflective, Photo IC Output](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[GP2A240LCS0F](#) [AEDR-8300-1W1](#) [AEDR-83001K2](#) [AEDR-83001P2](#) [C3012-TW-B-V](#) [C3012-TW-R-V](#) [GP2A230LRSF](#) [C128973](#)
[C128975](#) [K6-1212A-04](#) [K6-6136D-L1-04](#) [K6-6151S02](#) [K6-6271D-02](#) [K6-8859D-04](#) [EE-SG3M](#) [EE-SPY801](#) [EE-SPY802](#) [EE-SY1201](#) [EE-](#)
[SY310](#) [EE-SY410](#) [GP2A200LCS0F](#) [GP2A200LCSCF](#) [GP2A25J0000F](#) [SR-0609-07](#) [TLLAG-72BPG-R1SH1-V-A](#) [OPB715Z](#) [OPB716Z](#)
[OPB718Z](#) [OPB720A-06Z](#) [OPB720A-30VZ](#) [OPB720B-06Z](#) [OPB720B-12Z](#) [OPB770TZ](#) [OPB771TZ](#) [OPB773TZ](#)