

SCHMATIC



MODEL CODE

SS-12D16-X-X-X

Knob Type
L
G

H (mm)
2 ~ 12

Colour
B:Black
R:Red

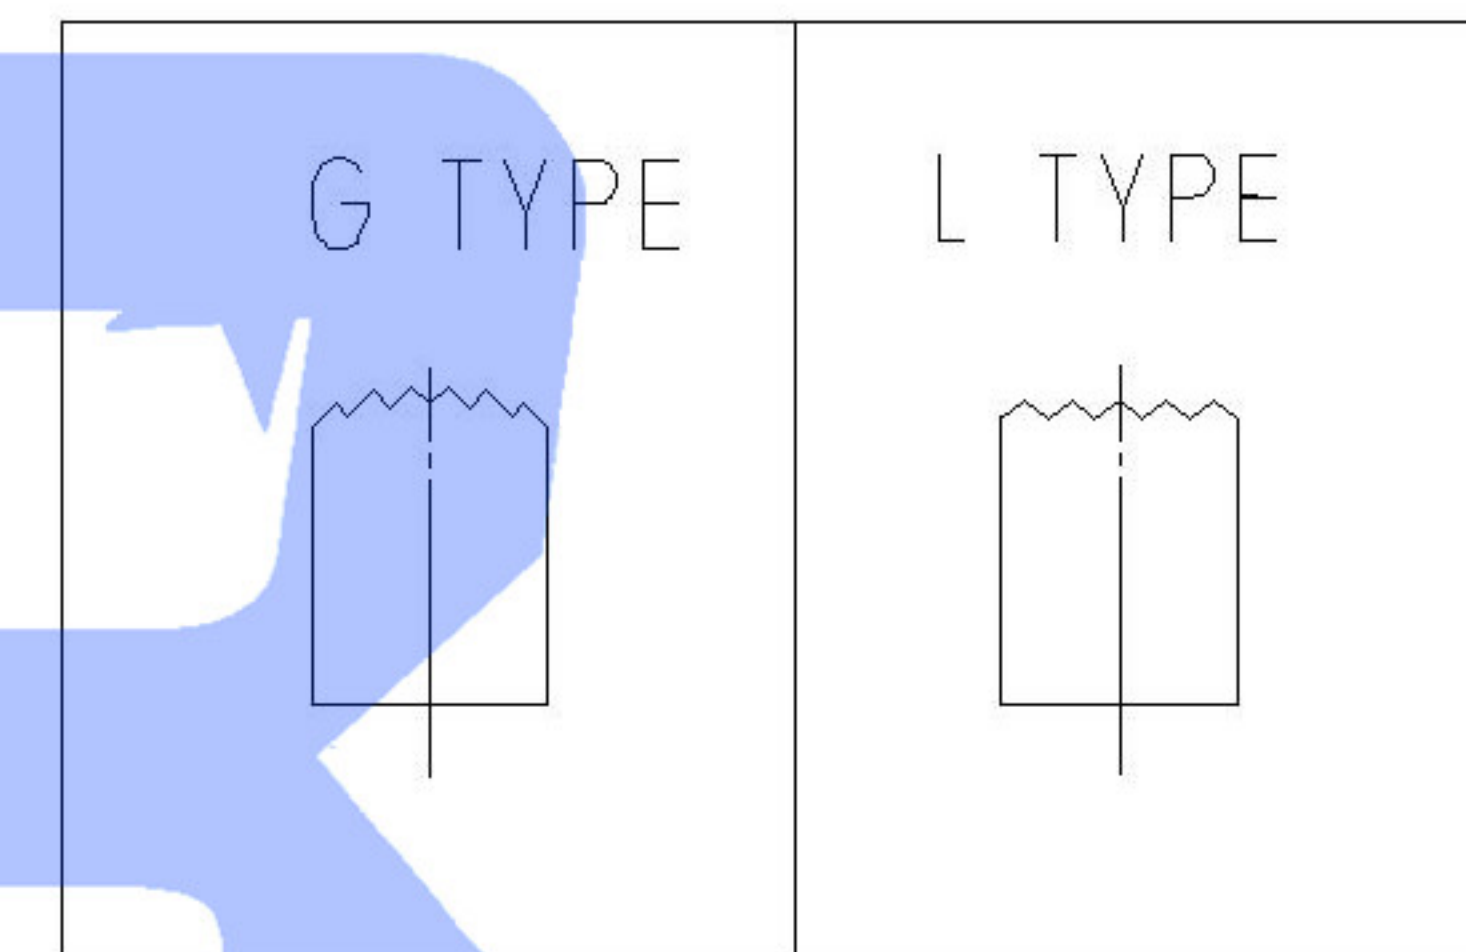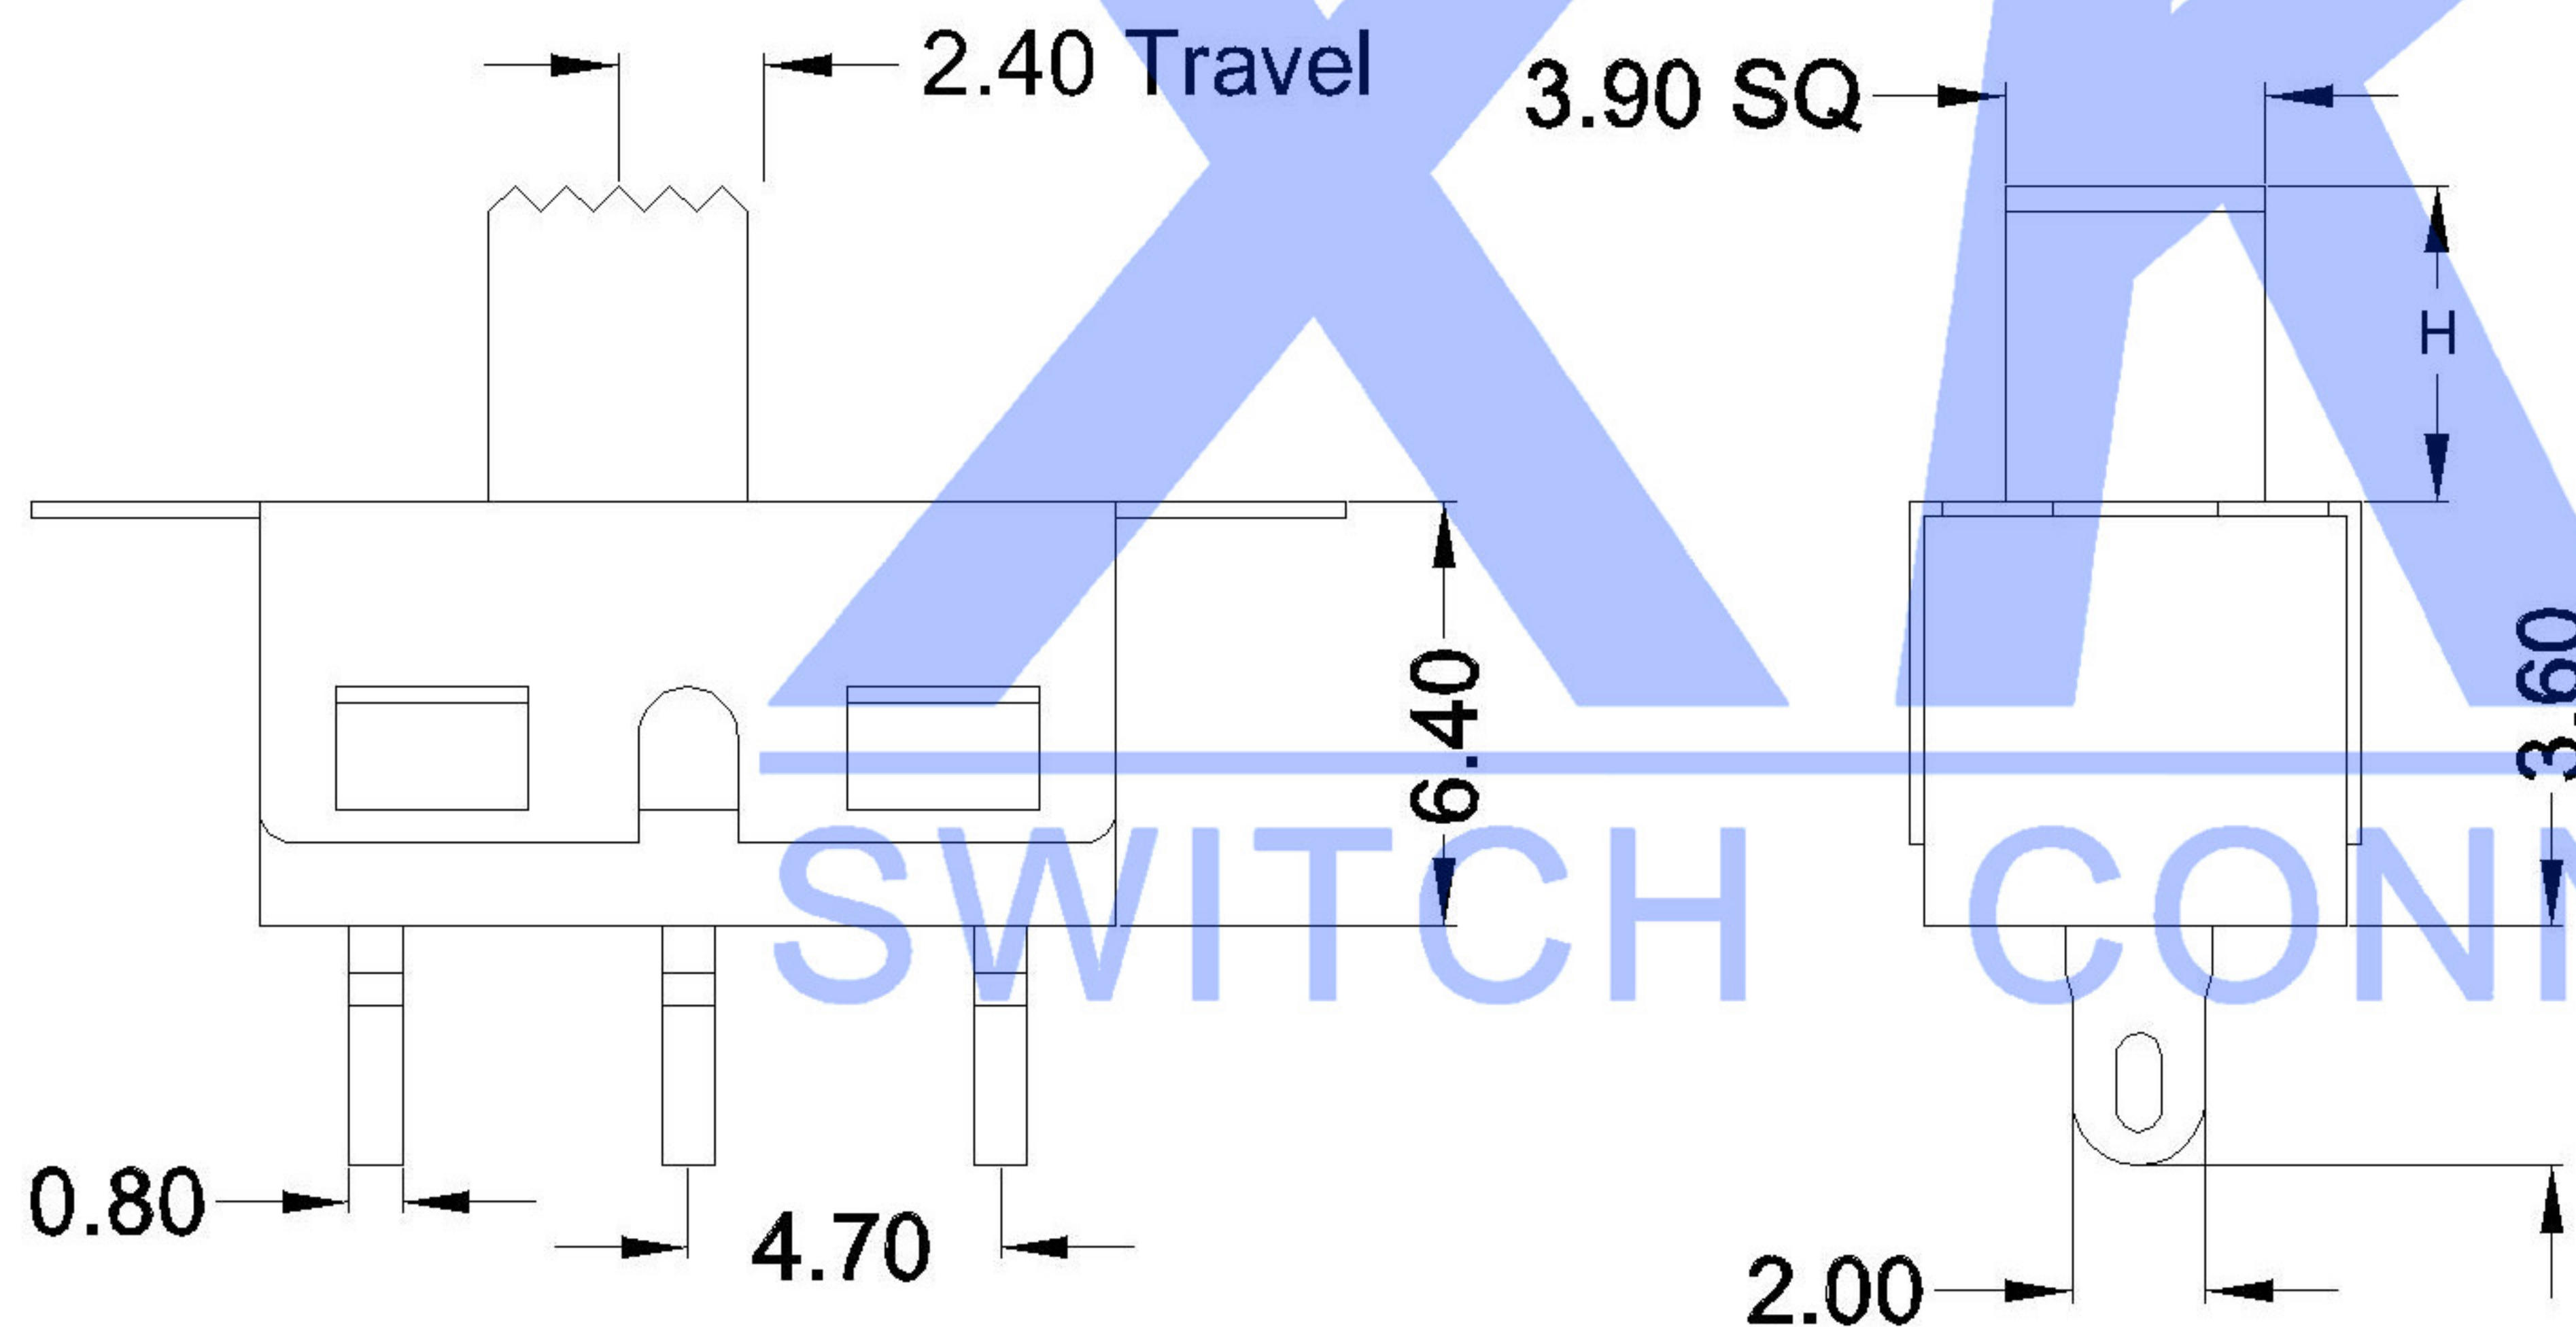

Typical Specifications

1. Rating : AC 120V 5A
2. Insulation Resistance: 1,000M min
3. Dielectric Strength: 1,500V RMS
4. Operating Life : 10,000 cycles

⑤	Terminal	—	3	Copper Alloy	silver plated	—
④	Contact	—	1	Copper Alloy	silver plated	—
③	Housing	—	1	Stainless Steel		—
②	Slide Handle	—	1	Nylon		—
①	Case	—	1	Diallyl Phthalate (DAP)		—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

					ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE:	SLIDE SWITCH		
					X.X	±0.2mm	DWN		DATE		VIEW:	PART NO.:			
					X.XX	±0.1mm	CHKD		DATE		UNIT: mm	DWG NO.:			
					X.XXX	±0.05mm	APPD		DATE		SIZE: A4	SS-12D16-XX-X			
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT	SHEET	REVISION	
REVISIONS												1.0g	1/1	A0	
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn															

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Toggle Switches](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[A19HV](#) [8A1-C-222](#) [60012L](#) [6006L](#) [6663](#) [7101MD9V30GE](#) [7101SPDV30BE](#) [7103SDV30BE](#) [7105D](#) [7108P3YAV2BE](#) [71YY50282](#)
[7201MD9AVBE](#) [7301K38](#) [7306K36](#) [7310K36](#) [7314K36](#) [7506K4](#) [7592K6](#) [7691K14](#) [7700K1](#) [8396K108](#) [8824K14](#) [8828K13](#) [G2VX](#) [G3VX](#)
[PS83-121G](#) [A101MD9AB04](#) [A101SD9AB04](#) [A101SDCQ04](#) [A103SD9AQ04](#) [A107TZB04](#) [A123P32YZQ](#) [A123S1YZG](#) [A127S1YCQ](#) [1-](#)
[1825192-0](#) [A131S1YZQ](#) [A201SCWZB04](#) [A207SYCB04](#) [A208J61ZQ0004](#) [A221K12KAG](#) [A221S1YZQ](#) [A221T1TCQ](#) [A232K12KZQ](#)
[A232M1YCQ](#) [A323S1CWZQ](#) [A423S1CWZG-M8](#) [A423S1YZQ](#) [12149A-3V](#) [12156AX408](#) [12147AGKX679](#)