



**SPECIFICATION**

**Contact Rating :** 50mA,12V DC  
**Contact Resistance :** 100mΩ max  
**Insulation Resistance :** 100mΩ min.500V DC  
**Dielectric Strength :** 250V AC/1minute  
**Travel :** 0.25mm  
**Operating Temp :** -20 °C~+70 °C  
**Storage Temp :** -30 °C~+80 °C

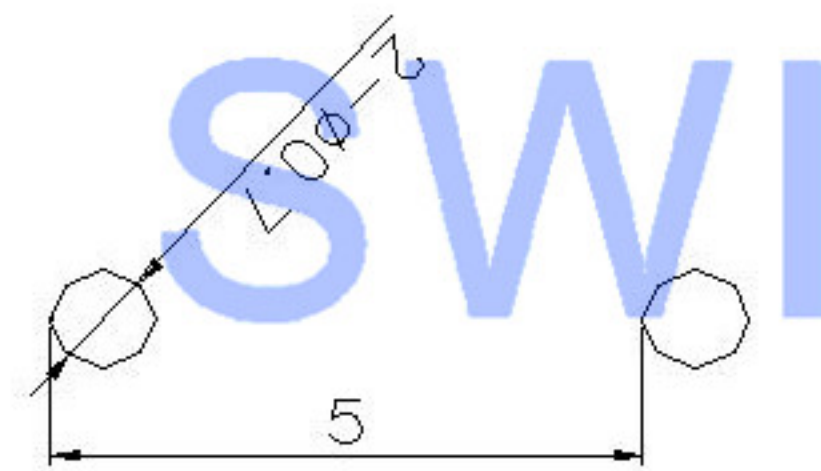

PCB. WELDING DRAWING

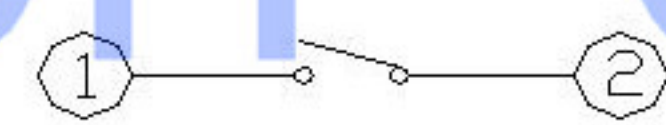

CIRCUIT DIAGRAM

| Code-X | H   |
|--------|-----|
| A      | 4.3 |
| B      | 4.8 |
| C      | 5.0 |
| D      | 5.3 |
| E      | 5.5 |
| F      | 6.0 |

|                 |                   |
|-----------------|-------------------|
| PAPT NO         | TC-1101DE-X-X     |
| Operating Force | B: 160gf C: 260gf |
| Height          | Code-X            |

| ITEM | PAPT NAMF | TER,NO | QTY | MATERIAL      | FINISHING         | REMARK |
|------|-----------|--------|-----|---------------|-------------------|--------|
| ⑤    | Terminal  | —      | 2   | Brass (0.30t) | Plating silvering | —      |
| ④    | Contact   | —      | 1   | F.ag/Sus      | Natural           | —      |
| ③    | Base      | —      | 1   | LCP           | —                 | —      |
| ②    | Cover     | —      | 1   | Spcc          | Plating Nickel    | —      |
| ①    | Keystake  | —      | 1   | Pa46          | —                 | —      |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | units: mm              | DSND  | DATE | SCALE: N/A | MODEL TYPE:          |       |          |
|------|-------------|------|---------|----------|------------------------|---|------|------------|----------------------|-------|----------|
| Δ X  |             |      |         |          | tolerance:             | DWN   | DATE | VIEW:      | <b>TACT SWITCH</b>   |       |          |
|      |             |      |         |          | X.X ±0.2mm             | CHKD  | DATE | UNIT: mm   | PART NO.:            |       |          |
|      |             |      |         |          | X.XX ±0.1mm            | APPD  | DATE | SIZE: A4   | DWG NO.:             |       |          |
|      |             |      |         |          | X.XXX ±0.05mm          |   |      |            | <b>TC-1101DE-X-X</b> |       |          |
|      |             |      |         |          | UNSPECIFIED TOLERANCES | <b>XKB INDUSTRIAL PRECISION CO.,LIMITED</b> |      |            | WEIGHT               | SHEET | REVISION |
|      |             |      |         |          |                        |   |      |            | 1.0g                 | 1/1   | A0       |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Tactile Switches](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[KMR633NG](#) [LFG](#) [5GTH92001](#) [5GTH9202242](#) [6426-201-11343](#) [MJ1226](#) [MJTP1109B](#) [MJTP1138EAUTR](#) [MJTP1230BL](#) [MJTPSHW](#)  
[GS6.90F300QP](#) [1-1977223-0](#) [1-1977120-4](#) [ADTSA62NV](#) [ADTSA62RV](#) [ADTSA63KV](#) [ADTSA644NV](#) [ADTSM24NVTR](#) [ADTSMW66NV](#)  
[ADTSMW67RV](#) [ATM533VTR](#) [1571300-3](#) [B3F-3123](#) [B3F-6055A](#) [B3F-B32-01-KIT](#) [1977177-8](#) [1977266-1](#) [2-1977223-4](#) [2-1977223-7](#)  
[ADTS644KV](#) [ADTSA61RV](#) [ADTSA62KV](#) [ADTSA63NV](#) [ADTSA63RV](#) [ADTSA65NV](#) [ADTSM21NSVTR](#) [ADTSM25RVTR](#)  
[ADTSM31RVTR](#) [ADTSM32NVTR](#) [ADTSM61YVTR](#) [ADTSM63SVTR](#) [ADTSM644KVTR](#) [ADTSMW64RV](#) [ADTSMW69NV](#)  
[FSMRA4JHA04](#) [GS4.70F300QP](#) [D38999/20JJ37SA](#) [TL1105B](#) [TL1105J](#) [ATH447K2Q](#) [ATM534VTR](#)