





SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:**
 - RATING: 1.8A (PIN1/5), 0.5A (PIN2/3/4)
 - CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - DILECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
- MECHANICAL CHARACTERISTICS:**
 - INSERTION FORCE : 3.6 KGF (MAX)
 - WITHDRAWAL FORCE : 0.8 KGF(MIN)
- DURABILITY:** 10,000 CYCLES .
- WATER PROOFNESS:** THIS PRODUCT IS BASED ON IPX7(1m,30min)
- PLUG INTERFACE DIMENSIONS** CONFORM TO USB2.0 SPEC.
- OVAL RING**
 - The amount of low molecular siloxanes(D3~D10) is less than 200ppm
 - Hardness of silicone rubber:50'±5'
 - Burrs of silicone rubber:0.1mm max
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.**
- PACKAGING:** TAPE & REEL.

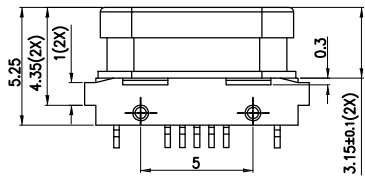

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3

ITEM	PART NAME	TERMINAL	QTY	MATERIAL	REMARK
◆	BOND	----	1	----	----
◆	CONTACT	No.1 - No.5	5	C2680 T=0.20	Under plating: Ni plating Contact area: Gold flash plating Soldering area: Sn plating
◆	SHELL	----	1	SUS304 T=0.25	1st: Cu, 2nd: Ni PLATED
◆	INSERT MOLDING	----	1	LCP(E130,BLACK)	UL-94V-0
◆	HOUSING	----	1	PA6T(GP2450,BLACK)	UL-94V-0

					DSND	DATE	SCALE: N/A	MODEL TYPE: MICRO USB
ΔX				ANGLAR	±5°			
ΔX				L ≤ 4	±0.2		VIEW:	PART NO.:
ΔX				4 < L ≤ 16	±0.3	CHKD	UNIT: mm/in	DWG NO.:
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63	APPD	SIZE: A4	U-E-M7SS-Y-5
					L > 63			WEIGHT
					UNSPECIFIED TOLERANCES			SHEET
								REVISION
								1.0g
								1/1
								A0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[950](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBC111M5](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [896-30-004-00-000000](#)
[KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#) [1734082-1](#) [30-1574](#) [30-470](#) [30-489](#) [30-541](#) [A-USB A-2P-C](#)
[MIKROE-1451](#) [USBFTV2PEM2G](#) [USBFTVSCCG](#) [4689-1](#) [1-1734084-2](#) [MUSBC11135](#) [USBF21ZNSCC](#) [USBBFTV6ZC](#) [MUSBB151341](#)
[10135326-001LF](#) [M9177/3-1](#) [TJ-105](#) [USB-A-S-F-B-VT](#) [4198](#) [690-024-633-031](#) [UB-20PMFP-LC7001](#) [USBFTVC6MRG](#) [UA-20BMFA-](#)
[SL8001](#) [17-200011](#) [USBFTVC7ZC](#) [UB-20AFMM-LL7A01](#) [USBFTVC2MN](#) [CAP-WCCMLPB1](#) [1310-1031-01](#) [2041386-1](#) [2274475-3](#) [UB-](#)
[20BMFA-SL8001](#) [UB-20PMFP-SC8003](#) [914-614A2025S10200](#)