

Autodesk

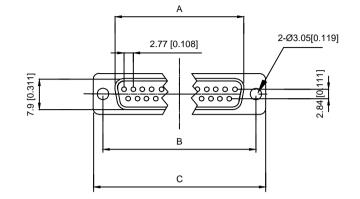



| Specifications: |
|-----------------------------------|
| 规格: |
| Current rating:3A AC/DC |
| 额定电流: 3A AC/DC |
| Withstanding voltage:1000 |
| AC/minute |
| 耐受电压: ≥1000V AC/分钟 |
| Temperature range:-25 ℃-+105 ℃ |
| 温度范围: -55℃-+105℃ |
| Insulation resistance:500MΩMIN |
| 绝缘电阻: ≥500MΩ |
| Contact resistance:25mΩMAN |
| 接触电阻:≪25mΩ |
| Materiai: |
| 材料: |
| Contacts:Brass |
| 接触:黄铜 |
| Insulator:PBT+30 % |
| 绝缘体: PBT+30% |
| Shell(Fead):SPCC |
| 外壳:铁 |
| MECHANIAL CHATACTERICS: |
| 插拔力: |
| Contact Insertion force:300gf MAX |
| 插入力:最大300gf |
| Contact Separation Force:25gf MIN |
| 拔出力: 最小25gf |
| |

| 5.80 [0.227] | | |
|--------------|--|--|
|--------------|--|--|

5.80 [0.227]

| X01 | XXFXXXX |
|-----|--|
| 1 | $\boxed{0} \ \boxed{0} \ $ |
| | IS NO. No Rin No XX 00:15:25:27 |

Autodesk

| Series N0. Row No.Pin No.X | X-09;15;25;37 | | |
|---|--------------------|------------------|---------|
| Welding Board A | | | |
| ④T: Tradutional | C: Car-pin | | |
| 5 Planting Categoti | ry: 1:1U 2:2U 3:3U | 4:5U 5:15U 6:30U | 7:Au Sr |
| 6B:BLACK W:Whi | | | |
| ①1:TYPE-1; 2:TYP | PE-2; 3:TYPE-3; 4: | TYPE-4; 5:TYPE-5 | |

| NO.POS | A±0.38 | B±0.13 | C±0.20 | D±0.38 |
|--------|--------|--------|--------|--------|
| 9PIN | 16.33 | 24.99 | 30.80 | 19.28 |
| 15PIN | 24.66 | 33.32 | 39.20 | 27.65 |
| 25PIN | 38.35 | 47.04 | 53.10 | 41.20 |
| 37PIN | 54.80 | 63.50 | 69.40 | 57.44 |

| | | | | | | DSND | | DATE | | SCALE: N/A | MODEL TY | PE: | |
|--|------|---------|----------|---------------|-----------|--------------|---------------|------|----------|-------------|-----------|---------|----------|
| | | | | units: | mm | DWN | | DATE | | VIEW: | | | |
| | | | | tolerance: | | DWIN | | DATE | | | PART NO.: | | |
| | | | | X.X | ±0.2mm | СНКД | | DATE | | UNIT: mm/in | | | |
| | | | | X.XX | ±0.1mm | | | | | | DWG NO.: | | |
| DESCRIPTION | DATE | REVISED | APPROVED | X.XXX | ±0.05mm | APPD DATE | | | SIZE: A4 | X01XXFXXXX | | (X | |
| REVISIONS | | | | UNSPECIFIED 1 | OLERANCES | | | | | | WEIGHT | • SHEET | REVISION |
| www.xk-dg.cn www.helloxkb.com www.helloxkb.cn | | | | | | INDUSTRIAL F | PRECISION CO. | | LIMITED | 1.0g | 1/1 | A0 | |
| Antopic Antopi | | | | | | | | | | | | | |

∆x ∆x Δx MARK

4.00 [0.157] **AAA**

AAA

TYPE-2加前铆(不通孔)



TYPE-3加后铆(通孔)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for HDMI, Displayport & DVI Connectors category:

Click to view products by XKB manufacturer:

Other Similar products are found below :

30-1231 30-528 30-504 30-519 33DVIR-24S1B 47648-2000 2002-400 TC142X 769-103/021-000 1932649-1 CP30200GM3 67881 HBLBH HBLBI HAFBG HAFBH HAGBF HAGBG HAGBJ HBLBJ AABIE AABIF AABIG AABIH AABIJ AABIK AACBE AACBF AACBG ABIBF ABIBG ABIBH AACBH AACBH AACBI AACBJ AACBK AACBL AAIBD AAIBF AAIBI AANBJ AAQBH AAQBI AARBG AARBH AARBI AAXBD ABAAF ABBBF AIDB0