


Specifications:

- 规格:  
 1.Voltage rating:250VAC/DC  
 额定电压: 250V AC/DC  
 2.Current rating:3A AC/DC  
 额定电流: 3A AC/DC  
 3.Withstanding voltage:500V AC/minute  
 耐受电压: 500V AC/分钟  
 4.Temperature range: -55°C~+105°C  
 温度范围: -55°C~+105°C  
 5.Insulation resistance:1000MΩ MIN  
 绝缘电阻:1000MΩ MIN  
 6.Contact resistance:30mΩ Max  
 接触电阻: 30mΩ Max  
 Material:  
 材料:  
 7.Rubber core:PBT UL94V-0  
 胶芯: PBT UL94V-0  
 8.The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating  
 铁壳: SPCC-SD,镀镍/镀锡/镀金  
 9.Terminal:Copper alloy  
 端子: 铜合金

X01 XX W X X X X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series NO.
- ② Row No.Pin No.XX-09;15;25;37
- ③ Welding Board Angle :W-Male
- ④ T: Tradutional C: Car-pin
- ⑤ Plating Catogoty: 1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:AuSn
- ⑥ Color:B-BLACK W-White BL-Blue
- ⑦ 1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4

| NUMBER OF POSITIONS | DIMENSION |        |        |        |
|---------------------|-----------|--------|--------|--------|
|                     | A±0.25    | B±0.13 | C±0.38 | D±0.25 |
| 9                   | 18.00     | 24.99  | 30.80  | 19.28  |
| 15                  | 26.50     | 33.32  | 39.20  | 27.51  |
| 25                  | 40.00     | 47.04  | 53.05  | 41.28  |
| 37                  | 56.60     | 63.50  | 69.40  | 57.71  |

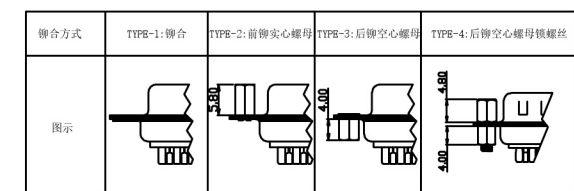

广东星坤科技股份有限公司

|       |             |
|-------|-------------|
| 姓名    | 日期          |
| 数量    | 日期          |
| MARK  | DESCRIPTION |
| 文件工程章 |             |

| DATE                   | REVISED | APPROVED | ANGLAR      | ±5°  |
|------------------------|---------|----------|-------------|------|
|                        |         |          | L ≤ 4       | ±0.2 |
|                        |         |          | 4 < L ≤ 16  | ±0.3 |
|                        |         |          | 16 < L ≤ 63 | ±0.4 |
|                        |         |          | L > 63      | ±0.5 |
| UNSPECIFIED TOLERANCES |         |          |             |      |



|                                      |             |                       |
|--------------------------------------|-------------|-----------------------|
| DSND                                 | SCALE: N/A  | MODEL TYPE: D-SUB     |
| DWN                                  | VIEW:       | PART NO.: X01XXWXXXX  |
| CHKD                                 | UNIT: mm/in | DWG NO.: X-X01XXWXXXX |
| APPD                                 | SIZE: A4    | WEIGHT SHEET REVISION |
| XKB INDUSTRIAL PRECISION CO.,LIMITED |             | 1/1 A0                |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [D-Sub Standard Connectors](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[015-0339-000](#) [015-0341-000](#) [015-0349-000](#) [015-0350-000](#) [015-8544-011](#) [015-8755-001](#) [017041-0005](#) [020419-0104](#) [609-25P](#) [609-9P](#)  
[M24308/2-23Z](#) [CT0-24-10SC](#) [CT0-36-3PC](#) [CT0E20-8PS](#) [CT0F16S-1PS](#) [CT0TA16-11SXCA232](#) [CT1E20-19SS](#) [CT2-10SL-3SC](#) [CT2-14S-2PCA34](#) [CT2-18-11PCAU](#) [CT2-22-19SC](#) [CT2-36-5PC](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#) [CT6-14S-2SC](#) [CT6-16-12SC](#) [CT6-18-10PSA206](#)  
[CT6-18-10PSA232](#) [CT6-18-11PXSA206](#) [CT6-18-11PXSA232](#) [CT6-22-10PS](#) [CT6-24-5PC](#) [CT6-9767-18-8-18-4SS](#) [CT6E14S-5SC](#)  
[CT6E14SA7SC](#) [CT6E20-14SS](#) [CT6E22-14PC](#) [CT6E22-14PS](#) [CT6E22-19PS](#) [CT6E22-22PS](#) [CT6E24-10SC](#) [CT6F16S-1SC](#) [CT6FA10SL-4PS](#)  
[CT6LA20-19PC](#) [CT6M20-19SS](#) [CT6NSB4-20-8SS](#) [CT6TC14S-6SCAU](#) [CT6TC14S-7PS](#) [6STD15SCT99S40X](#) [6STF09PCM05B70X](#)