


PCB LAYOUT

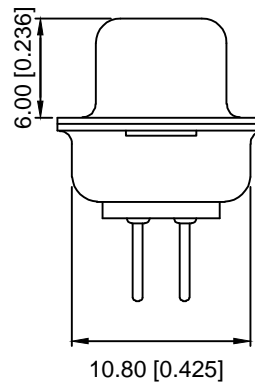

Specifications:

规格:

- 1.Voltage rating:250VAC/DC  
额定电压: 250V AC/DC
- 2.Current rating:3A(T) / 5A(C) AC/DC  
额定电流: 3A(T) / 5A(C) AC/DC
- 3.Withstanding voltage:500V AC/minute  
耐受电压: ≥500V AC/分钟
- 4.Temperature range: -55°C-+105°C  
温度范围: -55°C-+105°C
- 5.Insulation resistance:1000MΩMIN  
绝缘电阻: ≥1000MΩ

- 6.Contact resistance:30mΩMax  
接触电阻: ≥30mΩ

Material:

材料:

7.Rubber core:PBT UL94V-0

胶芯: PBT UL94V-0

8.The iron shell:SPCC Nivkel Plating/Tin Plating/Gold Plating  
铁壳: SPCC,镀镍/镀锡/镀金

B、成品不能有弯针，R角不一致等不良。

X02 XX W X X X X

① ② ③ ④ ⑤ ⑥ ⑦

① Series NO.

② Row No.Pin No.XX-09;15;25;37

③ Welding Board Angle :W-Male

④ T: Tradutional C: Car-pin

⑤ Planting Category: 1:Gold 1u ;2:Gold 2u ;3:Gold 3u ;4:Gold 5u ;5:Gold 15u ;6:Gold 30u ;7:Terminal half- Gold Bright Tin;8:Terminal half- Gold 2u Bright Tin ;9:Terminal half- Gold 3u Bright Tin;10:Terminal half- Gold 5u Bright Tin ;11:Terminal half- Gold 15u Bright Tin;12:Terminal half- Gold 30u Bright Tin ;13:Terminal half- Gold Matte Tin;14:Terminal half- Gold 2u Matte Tin ;15:Terminal half- Gold 3u Matte Tin ;16:Terminal half- Gold 5u Matte Tin ;17:Terminal half- Gold 15u Matte Tin;18:Terminal half- Gold 30u Matte Tin

⑥ Color:B-BLACK W-White BL-Blue

⑦ 1:TYPE-1; 2:TYPE-2; 5:TYPE-5; 7:TYPE-7

| NUMBER OF POSITIONS | DIMENSION |        |        |        |
|---------------------|-----------|--------|--------|--------|
|                     | A±0.25    | B±0.13 | C±0.38 | D±0.25 |
| 9                   | 30.80     | 24.99  | 18.00  | 19.28  |
| 15                  | 39.20     | 33.32  | 26.50  | 27.51  |
| 25                  | 53.05     | 47.04  | 40.00  | 41.28  |
| 37                  | 69.40     | 63.50  | 56.60  | 57.71  |

| 组合方式 | TYPE-1:riveting (铆合) | TYPE-2:Front riveted solid nut (前铆实心螺母) | TYPE-7:Rear-riveted harpoon (后铆鱼叉) | TYPE-5:Riveted harpoon lock screws (铆鱼叉锁螺丝) |
|------|----------------------|---|------------------------------------|---|
| 图示   |                      |   |                                    |   |

|      |             |                       |
|------|-------------|-----------------------|
| DSND | SCALE: N/A  | MODEL TYPE: D-USB     |
| DWN  | VIEW:       | PART NO.: X02XXWXXXX  |
| CHKD | UNIT: mm/in | DWG NO.: X-X02XXWXXXX |
| APPD | SIZE: A4    | WEIGHT SHEET REVISION |
|      |             | 1/1 A0                |



XKB INDUSTRIAL PRECISION CO.,LIMITED

|                        |      |
|------------------------|------|
| ANGLAR                 | ±5°  |
| L ≤ 4                  | ±0.2 |
| 4 < L ≤ 16             | ±0.3 |
| 16 < L ≤ 63            | ±0.4 |
| L > 63                 | ±0.5 |
| UNSPECIFIED TOLERANCES |      |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [D-Sub Standard Connectors](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[015-0339-000](#) [015-0341-000](#) [015-0349-000](#) [015-0350-000](#) [015-8544-011](#) [015-8755-001](#) [017041-0005](#) [020419-0104](#) [609-25P](#) [609-9P](#)  
[M24308/2-23Z](#) [CT0-24-10SC](#) [CT0-36-3PC](#) [CT0E20-8PS](#) [CT0F16S-1PS](#) [CT0TA16-11SXCA232](#) [CT1E20-19SS](#) [CT2-10SL-3SC](#) [CT2-14S-2PCA34](#) [CT2-18-11PCAU](#) [CT2-22-19SC](#) [CT2-36-5PC](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#) [CT6-14S-2SC](#) [CT6-16-12SC](#) [CT6-18-10PSA206](#)  
[CT6-18-10PSA232](#) [CT6-18-11PXSA206](#) [CT6-18-11PXSA232](#) [CT6-22-10PS](#) [CT6-24-5PC](#) [CT6-9767-18-8-18-4SS](#) [CT6E14S-5SC](#)  
[CT6E14SA7SC](#) [CT6E20-14SS](#) [CT6E22-14PC](#) [CT6E22-14PS](#) [CT6E22-19PS](#) [CT6E22-22PS](#) [CT6E24-10SC](#) [CT6F16S-1SC](#) [CT6FA10SL-4PS](#)  
[CT6LA20-19PC](#) [CT6M20-19SS](#) [CT6NSB4-20-8SS](#) [CT6TC14S-6SCAU](#) [CT6TC14S-7PS](#) [6STD15SCT99S40X](#) [6STF09PCM05B70X](#)