
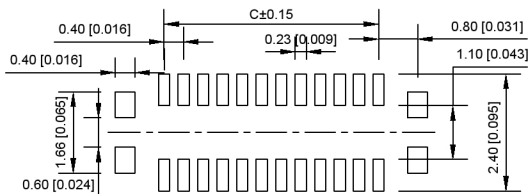

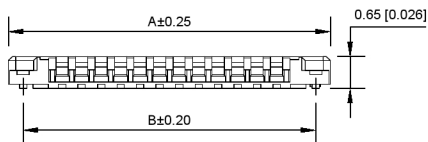


XKB Connectivity

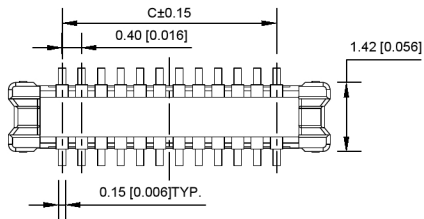

RECOMMENDED PCB LAYOUT

CONNECTOR SIDE

XKB Connectivity

广东星坤科技股份有限公司

生 日期

文件工程章

REVISIONS

www.xkb.cn www.hellixkb.com www.hellixkb.cn

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

UNSPECIFIED TOLERANCES

XKB Connectivity

规格 SPECIFICATIONS:

- 1.电压/电流额定值 VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- 2.耐电压 WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.绝缘电阻 INSULATION RESISTANCE: 50MΩ MIN;
- 4.接触电阻 CONTACT RESISTANCE: 100mΩ MAX;
- 5.工作温度范围 OPERATING TEMPERATURE RANGE: -35°C TO 85°C.

材料 MATERIAL:

- 1.绝缘材料 INSULATOR: LCP UL 94V-0 BLACK;
- 2.端子 TERMINAL: COPPER ALLOY;
- 3.金属配件 METAL FITTINGS: COPPER ALLOY.

镀层 PLATING:

- 1.端子 TERMINAL: GOLD PLATING,
NICKEL 50u" MIN. OVER ALL;
- 2.金属配件 METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u" MIN.

X0400 W V S-XX S-LP SN

○ Series N o

⊙ Weld in g Board Angle : W-Wafer

⊙ Weld in g Board Angle : V-180° R-90°

⊙ Welding Way:S-SMT

⊙ Row No.-Pin No.: XX-Single Row

⊙ S: With positioning column , Null: No positioning column

⊙ Material: LP-LCP 94V-2

⊙ Plating Category: SN-Bright Tin Plating (70-120u")

XKB Connectivity

PIN NO.	A	B	C
10	3.8	3.2	1.6
12	4.2	3.6	2.0
16	5.0	4.4	2.8
20	5.8	5.2	3.6
24	6.6	6.0	4.4
30	7.8	7.2	5.6
34	8.6	8.0	6.4
40	9.8	9.2	7.6
50	11.8	11.2	9.6

DSND	DATE	SCALE: N/A	MODEL TYPE: BTB CONNECTOR
DWNN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	X0400WVS-XX-LP SN
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT SHEET REVISION 1.0g 1/1 A0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [93696-330](#) [224393](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [45970-4130](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [101A10019X](#) [105061100000861+](#) [55650-0588-C](#) [75140-7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [YTT-112-01-H-Q](#) [063209](#) [0717420006](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [IL-WX-10PB-HF-B-E1000E](#) [YFT-50-05-H-10-SB-K](#) [FCN-268M024-G/3D](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [74220-001](#) [354184](#) [P50-028-DDS-TG](#) [53309-2471](#)