

## Autodesk

									44PIN	38.96	47.04	53.10	41.20	2.29
		FI I LI LI							62PIN	55.42	63.50	69.40	57.44	2.29
	80								•	•	•			
								DSND	D	ATE	SCAL	.E: N/A	IODEL TYPE:	
						units:	mm	DWN		ATE		·@	PART NO.:	
Δ×						tolerance:					VIL VV	·\\F	PART NO.:	
Δx						X.X	±0.2mm	Тснкд	D	ATE	UNIT	: mm/in		
Δx						X.XX	±0.1mm					D	WG NO.:	
MARK	DESCRIPTION		DATE	REVISED	APPROVED	X.XXX	±0.05mm	APPD	D	ATE	SIZE	: A4	X04XXW	√XXXX
REVISIONS UNSPECIFIED TOLERANCES													WEIGHT SHEE	ET REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn									XKB INDUSTRIAL PRECISION CO.,LIMITED				1.0g 1/1	A0
-														

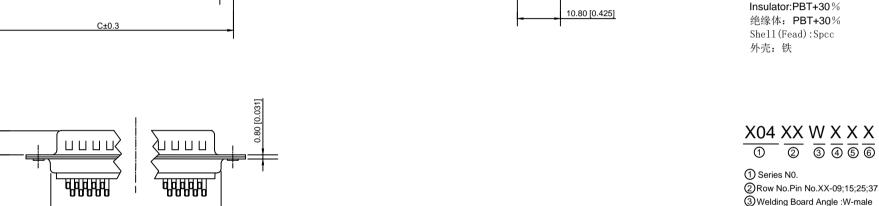

Autodesk




D±0.3

TYPE-3加后铆(通孔)

666

TYPE-2加前铆(不通孔)

пґ



## Specifications:

规格: Current rating:5A AC/DC 额定电流: 5A AC/DC Withstanding voltage:500 AC/minute 耐受电压: ≥500V AC/分钟 Temperature range:-25 °C -+85 °C 温度范围: -55℃-+85℃ Insulation resistance:1000MΩMIN 绝缘电阻: ≥1000MΩ Contact resistance:30mQMAN 接触电阻:≤30mΩ Materiai: 材料: Contacts:Brass Gold Plated 接触:黄铜镀金 Insulator:PBT+30% 绝缘体: PBT+30% Shell(Fead):Spcc 外壳:铁

## X04 XX W X X X X

(4)T: Tradutional C: Car-pin

В

24.99

33.32

NO.POS

15PIN

26PIN

А

16.92

25.25

(5) Planting Categotry: 1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7 : AuSn

(7)1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4; 5:TYPE-5; 6:TYPE-6

С

30.80

39.20

D

19.00

27.65

Е

2.29

2.29

6B:BLACK W:White BL:Blue Y:Yellow G:Green R:Red

[0.236]

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for HDMI, Displayport & DVI Connectors category:

Click to view products by XKB manufacturer:

Other Similar products are found below :

30-1231 30-528 30-504 30-519 33DVIR-24S1B 47648-2000 2002-400 TC142X 769-103/021-000 1932649-1 CP30200GM3 67881 HAFBF HBLBH HBLBI HAFBG HAFBH HAGBF HAGBG HAGBI HAGBJ HBLBJ AABIE AABIF AABIG AABIH AABII AABIJ AABIK AABIL AACBE AACBF AACBG ABIBF ABIBG ABIBH 42154 AACBH AACBI AACBJ AACBK AACBL AAIBD AAIBF AAIBH AAIBI AANBF AANBG AANBH AANBI