
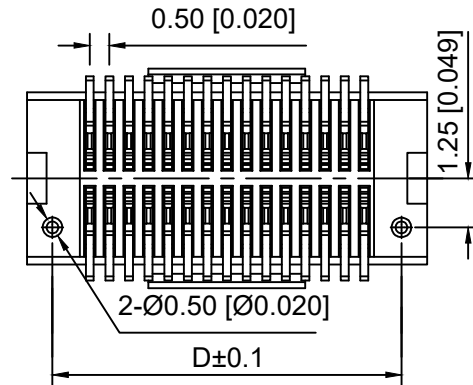
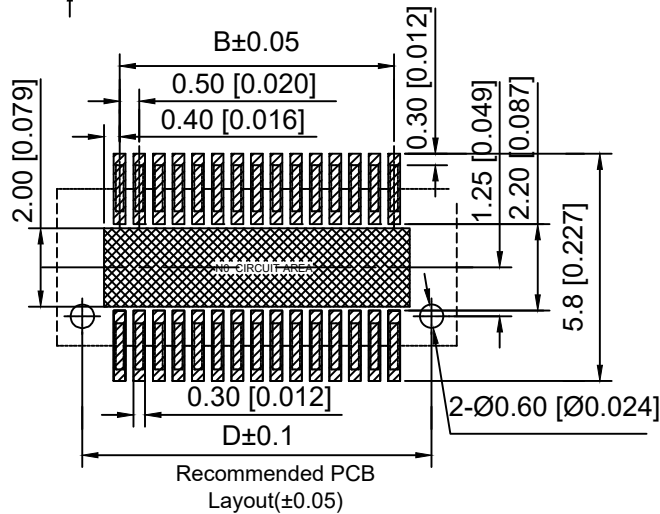
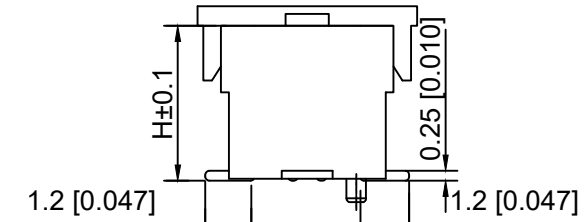


3D VIEW

Specifications:
 规格:
 Voltage rating:50V AC/DC
 额定电压: 50V AC/DC
 Current rating:0.5A AC/DC
 额定电流: 0.5A AC/DC
 Withstanding voltage:200V AC/minute
 耐受电压: 200V AC/分钟
 Temperature range:-40°C~+85°C
 温度范围: -40°C~+85°C
 Insulation resistance: 100MΩ min
 绝缘电阻: 100MΩ Min
 Contact resistance:50mΩ Max
 接触电阻: 50mΩ Max

X0515 F V S-XX X S-9T V01
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:V-Straight 180°
- 4.Welading Way:S-SMT
- 5.Row No.Pin No:XX-04-100P
- 6.Height:A=7.0; B=7.5; C=8.0; D=8.5mm;
- 7.Special No:S-With positioning Columnm
- 8.Material:9T-PA9T UL 94V-0 Black
- 9.Plating:V01-Gold Flash

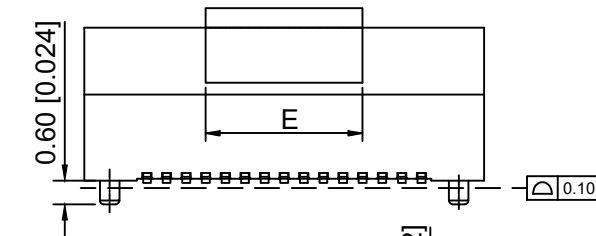

| Mating Height | PLUG | SOCKET |
|---------------|------|--------|
| 7.0 | 4.0 | 3.0 |
| 7.5 | 4.0 | 3.5 |
| 8.0 | 4.0 | 4.0 |
| 8.5 | 4.0 | 4.5 |

| Poles | Dimensions | | | | | Poles | Dimensions | | | | |
|-------|------------|-------|-------|-------|---|-------|------------|-------|-------|-------|---|
| | A | B | C | D | E | | A | B | C | D | E |
| 4 | 3.70 | 0.50 | 1.56 | 2.40 | | 54 | 16.20 | 13.00 | 14.06 | 14.90 | |
| 6 | 4.20 | 1.00 | 2.06 | 2.90 | | 56 | 16.70 | 13.50 | 14.56 | 15.40 | |
| 8 | 4.70 | 1.50 | 2.56 | 3.40 | | 58 | 17.20 | 14.00 | 15.06 | 15.90 | |
| 10 | 5.20 | 2.00 | 3.06 | 3.90 | | 60 | 17.70 | 14.50 | 15.56 | 16.40 | |
| 12 | 5.70 | 2.50 | 3.56 | 4.40 | | 62 | 18.20 | 15.00 | 16.06 | 16.90 | |
| 14 | 6.20 | 3.00 | 4.06 | 4.90 | | 64 | 18.70 | 15.50 | 16.56 | 17.40 | |
| 16 | 6.70 | 3.50 | 4.56 | 5.40 | | 66 | 19.20 | 16.00 | 17.06 | 17.90 | |
| 18 | 7.20 | 4.00 | 5.06 | 5.90 | | 68 | 19.70 | 16.50 | 17.56 | 18.40 | |
| 20 | 7.70 | 4.50 | 5.56 | 6.40 | | 70 | 20.20 | 17.00 | 18.06 | 18.90 | |
| 22 | 8.20 | 5.00 | 6.06 | 6.90 | | 72 | 20.70 | 17.50 | 18.56 | 19.40 | |
| 24 | 8.70 | 5.50 | 6.56 | 7.40 | | 74 | 21.20 | 18.00 | 19.06 | 19.90 | |
| 26 | 9.20 | 6.00 | 7.06 | 7.90 | | 76 | 21.70 | 18.50 | 19.56 | 20.40 | |
| 28 | 9.70 | 6.50 | 7.56 | 8.40 | | 78 | 22.20 | 19.00 | 20.06 | 20.90 | |
| 30 | 10.20 | 7.00 | 8.06 | 8.90 | | 80 | 22.70 | 19.50 | 20.56 | 21.40 | |
| 32 | 10.70 | 7.50 | 8.56 | 9.40 | | 82 | 23.20 | 20.00 | 21.06 | 21.90 | |
| 34 | 11.20 | 8.00 | 9.06 | 9.90 | | 84 | 23.70 | 20.50 | 21.56 | 22.40 | |
| 36 | 11.70 | 8.50 | 9.56 | 10.40 | | 86 | 24.20 | 21.00 | 22.06 | 22.90 | |
| 38 | 12.20 | 9.00 | 10.06 | 10.90 | | 88 | 24.70 | 21.50 | 22.56 | 23.40 | |
| 40 | 12.70 | 9.50 | 10.56 | 11.40 | | 90 | 25.20 | 22.00 | 23.06 | 23.90 | |
| 42 | 13.20 | 10.00 | 11.06 | 11.90 | | 92 | 25.70 | 22.50 | 23.56 | 24.40 | |
| 44 | 13.70 | 10.50 | 11.56 | 12.40 | | 94 | 26.20 | 23.00 | 24.06 | 24.90 | |
| 46 | 14.20 | 11.00 | 12.06 | 12.90 | | 96 | 26.70 | 23.50 | 24.56 | 25.40 | |
| 48 | 14.70 | 11.50 | 12.56 | 13.40 | | 98 | 27.20 | 24.00 | 25.06 | 25.90 | |
| 50 | 15.20 | 12.00 | 13.06 | 13.90 | | 100 | 27.70 | 24.50 | 25.56 | 26.40 | |
| 52 | 15.70 | 12.50 | 13.56 | 14.40 | | | | | | | |

| X0515FVS-XXXS-9TV01 | PA9T | Phosphor Bronze | X0515W |
|---------------------|----------|-----------------|--------------------|
| PART NO | Material | Material(Pin) | Suitable XKB Wafer |

| | | |
|------|-------------|---------------------------|
| DSND | SCALE: N/A | MODEL TYPE: |
| DWN | VIEW: | 0.5mm BTB Style Connector |
| CHKD | UNIT: mm/in | PART NO.: |
| APPD | SIZE: A4 | X0515FVS-XXXS-9TV01 |
| | | DWG NO.: |
| | | X-X0515FVS-XXXS-9TV01 |



XKB INDUSTRIAL PRECISION CO.,LIMITED

| WEIGHT | SHEET | REVISION |
|--------|-------|----------|
| | 1/1 | A0 |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|------|-------------|------|---------|----------|------------------------|
| ΔX | | | | | ANGLAR ±5° |
| ΔX | | | | | L ≤ 4 ±0.2 |
| ΔX | | | | | 4 < L ≤ 16 ±0.3 |
| ΔX | | | | | 16 < L ≤ 63 ±0.4 |
| MARK | | | | | L > 63 ±0.5 |
| | REVISIONS | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [MIS-048-01-F-D-DP-K](#)
[832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [93696-330](#) [224393](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [MDF7-40DP-2.54DSA\(55\)](#)
[55323-1519](#) [069159702701000](#) [101A10019X](#) [105061100000861+](#) [75140-7012](#) [87471-650](#) [1744382-4](#) [063209](#) [10124054-515LF](#) [68685-603](#)
[8-1616154-3](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FX23-40P-0.5SV15B](#) [FCN-214J100-G/0](#) [354184](#) [P50-028-DDS-TG](#) [53309-2471](#)
[54546-2071](#) [1586617-1](#) [504248-1210](#) [504248-2010](#) [1-1437355-2](#) [9159005551906](#) [NDS100-004-BF](#) [93696-730LF](#) [91922-31141LF](#) [505274-](#)
[3440](#) [501493-2410](#) [504208-3410](#) [505006-0811](#) [505274-2040](#) [202436-1600](#) [202477-0414](#) [71660-7580](#) [73420-5192](#) [360-10-107-00-001000](#)