
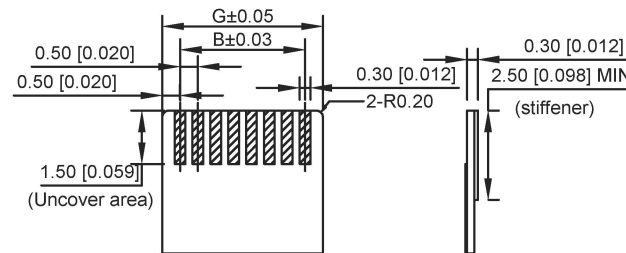
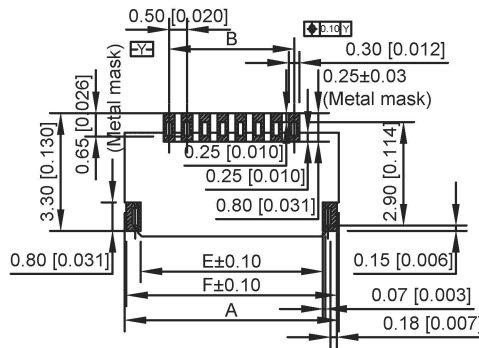
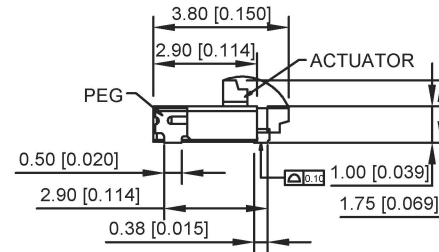


NOTES: MATERIAL & FINISH

- 1.MATERIAL:
 HOUSING:LCP(UL 94V-0)
 ACTUATOR:LCP(UL 94V-0)
 TERMINAL:COPPER ALLOY
 SOLDER PIN:COPPER ALLOY
- 2.PLATING:
 TERMINAL:GOLD E ASH OVER NICKEL
 SOLDER PIN:TIN OVER NICKEL(LEAD FREEY)

| | | | | | | | |
|--------------------|-------|-------|-------|-------|-------|-------|-------|
| 50 | 27.00 | 24.50 | 25.57 | 26.39 | 26.10 | 26.90 | 25.50 |
| 45 | 24.50 | 22.00 | 23.07 | 23.89 | 23.60 | 24.40 | 23.00 |
| 40 | 22.00 | 19.50 | 20.57 | 21.39 | 21.10 | 21.90 | 20.50 |
| 34 | 19.00 | 16.50 | 17.57 | 18.39 | 18.10 | 18.90 | 17.50 |
| 32 | 18.00 | 15.50 | 16.57 | 17.39 | 17.10 | 17.90 | 16.50 |
| 30 | 17.00 | 14.50 | 15.57 | 16.39 | 16.10 | 16.90 | 15.50 |
| 26 | 15.00 | 12.50 | 13.57 | 14.39 | 14.10 | 14.90 | 13.50 |
| 24 | 14.00 | 11.50 | 12.57 | 13.39 | 13.10 | 13.90 | 12.50 |
| 23 | 13.50 | 11.00 | 12.07 | 12.89 | 12.60 | 13.40 | 12.00 |
| 22 | 13.00 | 10.50 | 11.57 | 12.39 | 12.10 | 12.90 | 11.50 |
| 20 | 12.00 | 9.50 | 10.57 | 11.39 | 11.10 | 11.90 | 10.50 |
| 16 | 10.00 | 7.50 | 8.57 | 9.39 | 9.10 | 9.90 | 8.50 |
| 14 | 9.00 | 6.50 | 7.57 | 8.39 | 8.10 | 8.90 | 7.50 |
| 12 | 8.00 | 5.50 | 6.57 | 7.39 | 7.10 | 7.90 | 6.50 |
| 11 | 7.50 | 5.00 | 6.07 | 6.89 | 6.60 | 7.40 | 6.00 |
| 10 | 7.00 | 4.50 | 5.57 | 6.39 | 6.10 | 6.90 | 5.50 |
| 8 | 6.00 | 3.50 | 4.57 | 5.39 | 5.10 | 5.90 | 4.50 |
| 7 | 5.50 | 3.00 | 4.07 | 4.89 | 4.60 | 5.40 | 4.00 |
| 6 | 5.00 | 2.50 | 3.57 | 4.39 | 4.10 | 4.90 | 3.50 |
| 4 | 4.00 | 1.50 | 2.57 | 3.39 | 3.10 | 3.90 | 2.50 |
| Number of Contacts | DIM A | DIM B | DIM C | DIM D | DIM E | DIM F | DIM G |

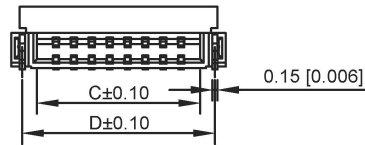

Recomend FPC Dim.

- 1.FPC NOT MATING CONDITION BANNED CLOSURE
 2.PART NO. LEGEND.

X05A10 L XX X
 ① ② ③ ④

- ① Series Name : X05A10=0.5 mm Pitch(H=1.0mm)
 ② Assembly style : L:Low Contact SMT Type U:Upper Contact SMT Type
 D:Double-Face Contact SMT Type H:Back-flip Double-Face Contact SMT Type
 ③ Number of terminals :XX=04-50PIN
 ④ Plating : G:Gold Flash Over Nickel T:Tin Over Nickel

3.PERFORMANCE:

- 3.1: CURRENT RATING:0.5A/PIN
 3.2: VOLTAGE RATING:50V(AC/DC)
 3.3: CONTACT RESISTANCE: INITIAL VALUE 30mOHM Max.
 3.4:INSULATION RESISTANCE:500MOHM Min.
 3.5:DIELERIC WITHSTANDING VOLTAGE:250V AC FOR 1MINUTE
 3.6:DURABILT: 20 TIMES Min
 3.7:OPERATING TEMPERATURE:-40℃ ~+85℃
 OPERATING HUMIDITY RANGE:20% TO 85%

Recommended PCB Layout(Top View)

Recommended metal mask pattern(thickness 0.1mm)

广东星坤科技股份有限公司

| | |
|----|----|
| 生 | 日期 |
| 效 | 日期 |
| Δx | |
| Δx | |
| Δx | |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | REVISIONS |
|------|-------------|------|---------|----------|-----------|
| 文件 | 工程 | | | | |

| | |
|-------------|------|
| ANGLAR | ±5° |
| L ≤ 4 | ±0.2 |
| 4 < L ≤ 16 | ±0.3 |
| 16 < L ≤ 63 | ±0.4 |
| L > 63 | ±0.5 |

UNSPECIFIED TOLERANCES

| | | | | | |
|---------------------------------------|--|------|--|-------------|------------------------------|
| DSND | | DATE | | SCALE: N/A | MODEL TYPE: FPC CONNECTOR |
| DWN | | DATE | | VIEW: ① | PART NO.: |
| CHKD | | DATE | | UNIT: mm/in | DWG NO.: |
| APPD | | DATE | | SIZE: A4 | X05A10LXXX |
| XKB INDUSTRIAL PRECISION CO., LIMITED | | | | | WEIGHT 1.0g |
| | | | | | SHEET 1/1 |
| | | | | | REVISION A0 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [52746-1671-TR250](#) [10051922-1610EHLF](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [20FLH-RSM1-TB](#) [207356-1](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#) [046283021002868+](#) [FFC05011-10SBB114W5M](#) [502250-8027](#) [67000-008LF](#) [200528-0260](#) [FH28K-10S-0.5SH](#) [FH52K-6S-0.5SH](#) [0.5K-DX-30PWB](#) [DS1020-08-10VBT12](#) [THD0515-34CL-GF](#) [X05A10L28G](#) [ECC2841061EU](#) [1.0K-DHQX-16PWB](#) [1.0K-DHQX-30PWB](#) [1775333-6](#) [10054365-202110ELF](#) [10054365-242110ELF](#) [10054365-282110ELF](#) [10064555-392220HLF](#) [59453-041110EBHLF](#) [59453-091110EDHLF](#) [62674-241141ALF](#) [62684-432100ALF](#) [62684-451100AHLF](#) [62684-5721N0ALF](#) [HFW11R-1STE1MTLF](#) [HFW12R-1STE9LF](#) [HFW14R-1STE9MTLF](#) [HFW18S-2STE9LF](#)