

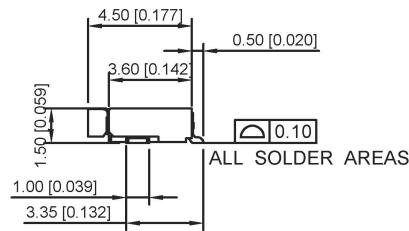



SECTION A-A

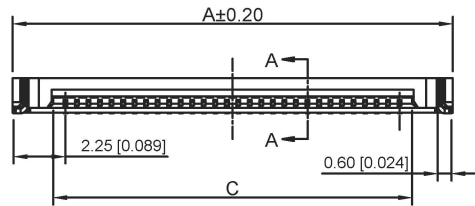

ALL SOLDER AREAS

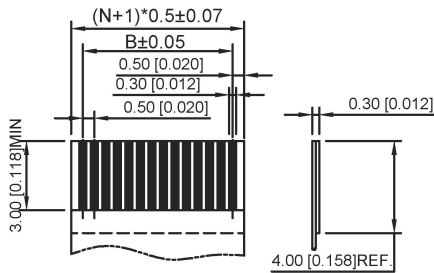

APPLICABLE FFC
TOLERANCE:±0.05

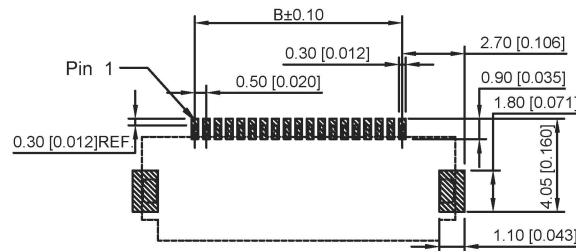

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

NOTES:

1.MATERIAL:

HOUSING: HIGHT-TEMP PLASTIC, UL94-VO.COLOR: NATURE;
COVER: HIGHT-TEMP PLASTIC,UL94-VO.COLOR: BLACK;
CONTACT: COPPER ALLOY;
LEG:COPPER ALLOY;

2.PLATING:

CONTACT: GOLD OR TIN PLATED ON NICKEL OVERALL
LEG:TIN PLATED ON NICKEL OVERALL

3.RATING:

CURRENT RATING:0.5A AC/DC
VOLTAGE RATING:25V AC/DC
TEMPERATURERANGE:-25℃ ~+85℃

4.PART NO:

X05A15 L XX X

① ② ③ ④

① Series Name :X05A15=0.5 mm Pitch(H=1.5mm)

② Assembly style : L:Low Contact SMT Type U:Upper Contact SMT Type
D:Double-Face Contact SMT Type H:Back-flip Double-Face Contact SMT Type

③ Number of terminals :XX=04-60PIN

④ Plating : G:Gold Flash Over Nickel T:Tin Over Nickel

| PIN NO. | DIM. A | DIM. B | DIM. C |
|---------|--------|--------|--------|
| 26 | 17.10 | 12.50 | 13.57 |
| 27 | 17.80 | 13.00 | 14.07 |
| 28 | 18.10 | 13.50 | 14.57 |
| 29 | 18.60 | 14.00 | 15.07 |
| 30 | 19.10 | 14.50 | 15.57 |
| 31 | 19.60 | 15.00 | 16.07 |
| 32 | 20.10 | 15.50 | 6.57 |
| 33 | 20.60 | 16.00 | 17.07 |
| 34 | 21.10 | 16.50 | 17.57 |
| 35 | 21.60 | 17.00 | 18.07 |
| 36 | 22.10 | 17.50 | 18.57 |
| 37 | 22.60 | 18.00 | 19.07 |
| 38 | 23.10 | 18.50 | 19.57 |
| 39 | 23.60 | 19.00 | 20.07 |
| 40 | 24.10 | 19.50 | 20.57 |
| 41 | 24.60 | 20.00 | 21.07 |
| 42 | 25.10 | 20.50 | 21.57 |
| 43 | 25.60 | 21.00 | 22.07 |

| PIN NO. | DIM. A | DIM. B | DIM. C |
|---------|--------|--------|--------|
| 44 | 26.10 | 21.50 | 22.57 |
| 45 | 26.60 | 22.00 | 23.07 |
| 46 | 27.10 | 22.50 | 23.57 |
| 47 | 27.60 | 23.00 | 24.07 |
| 48 | 28.10 | 23.50 | 24.57 |
| 49 | 28.60 | 24.00 | 25.07 |
| 50 | 29.10 | 24.50 | 25.57 |
| 51 | 29.60 | 25.00 | 26.07 |
| 52 | 30.10 | 25.50 | 26.57 |
| 53 | 30.60 | 26.00 | 27.07 |
| 54 | 31.10 | 26.50 | 27.57 |
| 55 | 31.60 | 27.00 | 28.07 |
| 56 | 32.10 | 27.50 | 28.57 |
| 57 | 32.60 | 28.00 | 29.07 |
| 58 | 33.10 | 28.50 | 29.57 |
| 59 | 33.60 | 29.00 | 30.07 |
| 60 | 34.10 | 29.50 | 30.57 |

广东星坤科技股份有限公司

生效日期

MARK DESCRIPTION

REVISIONS

www.helloxkb.com www.helloxkb.com www.helloxkb.com

文件工程章

| | | | | | |
|--------------------------------------|--|------|--|-------------|------------------------------|
| DSND | | DATE | | SCALE: N/A | MODEL TYPE: FPC CONNECTOR |
| DWN | | DATE | | VIEW: | PART NO.: |
| CHKD | | DATE | | UNIT: mm/in | DWG NO.: |
| APPD | | DATE | | SIZE: A4 | X05A15LXXX |
| XKB INDUSTRIAL PRECISION CO.,LIMITED | | | | WEIGHT | SHEET |
| | | | | 1.0g | 1/1 |
| | | | | REVISION | A0 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [52746-1671-TR250](#) [10051922-1610EHLF](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [20FLH-RSM1-TB](#) [207356-1](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#) [046283021002868+](#) [FFC05011-10SBB114W5M](#) [502250-8027](#) [67000-008LF](#) [200528-0260](#) [FH28K-10S-0.5SH](#) [FH52K-6S-0.5SH](#) [0.5K-DX-30PWB](#) [DS1020-08-10VBT12](#) [THD0515-34CL-GF](#) [X05A10L28G](#) [ECC2841061EU](#) [1.0K-DHQX-16PWB](#) [1.0K-DHQX-30PWB](#) [1775333-6](#) [10054365-202110ELF](#) [10054365-242110ELF](#) [10054365-282110ELF](#) [10064555-392220HLF](#) [59453-041110EBHLF](#) [59453-091110EDHLF](#) [62674-241141ALF](#) [62684-432100ALF](#) [62684-451100AHLF](#) [62684-5721N0ALF](#) [HFW11R-1STE1MTLF](#) [HFW12R-1STE9LF](#) [HFW14R-1STE9MTLF](#) [HFW18S-2STE9LF](#)