

REVISIONS
(Unauthorized Signature(s))






For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|------|-------------|------|---------|----------|------------------------|
| △ X | | | | | L > 63 ± 0.5 |
| △ X | | | | | 16 < L ≤ 63 ± 0.4 |
| △ X | | | | | 4 < L ≤ 16 ± 0.3 |
| | | | | | L ≤ 4 ± 0.2 |
| | | | | | ANGULAR ± 5° |

| DATE | DATE | DATE | DATE | DATE | DATE |
|-------------|-----------|-----------------------------|----------|------|------|
| DSND | DWN | CHKD | APPD | | |
| SCALE: N/A | VIEW: | UNIT: mm | SIZE: A4 | | |
| MODEL TYPE: | PART NO.: | 0.60mm IDC Style Connectors | | | |
| | DWG NO.: | | | | |
| | WEIGHT | SHEET | REVISION | | |
| | 1.0g | 1/1 | A0 | | |

| PART NO | Material | Wire Range | Insulation O.D. | Material(Terminal) | Finish(Terminal) | Suitable XKB Terminal |
|-----------------|------------------------------------|------------|-----------------|--------------------|------------------|-----------------------|
| X0600H-XX-L-PHF | LCP UL94V-0 Halogen Free(Black) | AWG#36/34 | 0.29mm(Max) | Phosphor Bronze | Gold-Flash | X0600W |
| X0600H-XX-L-PHF | LCP UL94V-0 Halogen Free(Black) | | | | Tin-Plated | |

| Poles | Dimensions(mm) | | |
|-------|----------------|------|------|
| | A | B | C |
| 02 | 0.60 | 1.80 | 1.35 |
| 03 | 1.20 | 2.40 | 1.95 |
| 04 | 1.80 | 3.00 | 2.55 |
| 05 | 2.40 | 3.60 | 3.15 |
| 06 | 3.00 | 4.20 | 3.75 |
| 07 | 3.60 | 4.80 | 4.35 |
| 08 | 4.20 | 5.40 | 4.95 |
| 09 | 4.80 | 6.00 | 5.55 |
| 10 | 5.40 | 6.60 | 6.15 |
| 11 | 6.00 | 7.20 | 6.75 |

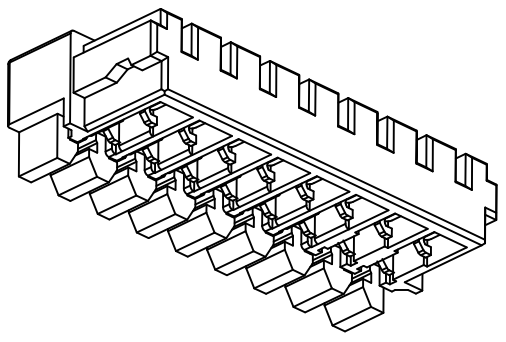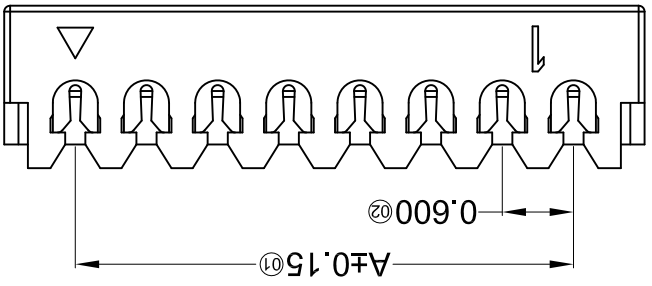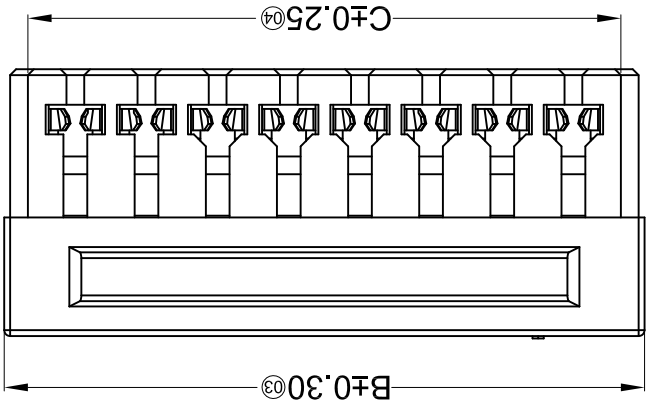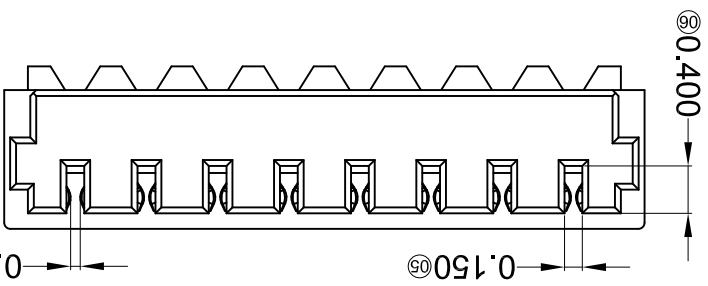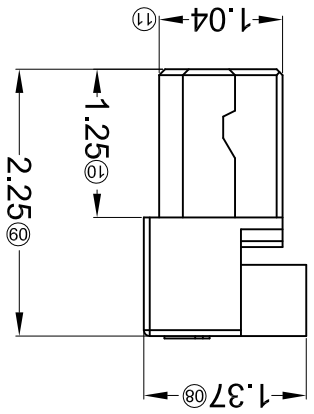

- Series No. 01 02 03 04 05 06 07 08
- ① Series No.
 - ② Category: H-HSG
 - ③ Welding Board Angle: LHSG+hardware
 - ④ Row No.-Pin No.: XX-Single row
 - ⑤ Plating style: Blank-Tin plating; G-Gold plated
 - ⑥ Material: LP-LCP 94V-0
 - ⑦ Color: Blank-natural color Black
 - ⑧ HF-Halogen free
- X0600 H-I-XX-X-LP-XX-HF

- Specifications :
- Voltage rating: 30V AC / DC
 - Current rating: 0.2A AC / DC
 - Withstanding voltage: 200V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥100MΩ
 - Contact resistance: ≤30mΩ
 - After environmental testing: ≤40mΩ

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [xkb](#) manufacturer:

Other Similar products are found below :

[SS-12D10L3](#) [U263-241N-4BQC11-1](#) [X3025WV-2x03-46SN](#) [X2026WVS-2x10D-LPSW](#) [X9357HF-2x12G-N2](#) [DSIC03LH-P](#) [TM-004-D2-03](#)
[X6511WV-24H-C30D60](#) [DC-025LM-5A-2.0](#) [X03A10L13G](#) [PJ-309A-2](#) [TM-1201-A](#) [DM1-135C-1](#) [PJ-3582-W](#) [X6521WV-2x26H-C30D60](#)
[X8826WR-2x05-N0SN](#) [DC-005G-2.5A-2.0](#) [X2015WR-2x04-N0SN](#) [X1011WVS-2x03-9TV01](#) [PJ-322A-Y](#) [DC-018-2.5A-2.0](#) [DM1-180D-1](#)
[DM1-117C-1](#) [X3025WRS-2x02E-LPSW](#) [DSIC07LH-P](#) [DS-09BLP](#) [DC-049A](#) [TS-1101-C-W](#) [TS-1159UB-B-B-W](#) [X2015H-2x05-N0](#)
[X3025WR-06-N0SN](#) [DA-12RP](#) [DA-09RP](#) [X03A10L51G](#) [X1015WM-30L-C](#) [X2510WRS-05-9TSN](#) [TM-004-D3-03](#) [XKB5858-W-F-75](#)
[X1002WVS-07E-LPSWHF](#) [TS-1159UB-B-D-BL](#) [X6521WV-2x11H-C30D60](#) [X2000WVS-03-9TSN](#) [X05A26H24G](#) [X2510WRS-02-9TSN](#)
[X05A20H24G](#) [X9821WV-11-N0SN](#) [X5050WV-04-N2SN](#) [X6511FV-03-C85D32](#) [X6521WR-2x16H-C30D60](#) [X6511WVS-05H-C60D48-R1](#)