







REVISIONS
Authorized Signature(s)

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					L > 63 ± 0.5
△ X					16 < L ≤ 63 ± 0.4
△ X					4 < L ≤ 16 ± 0.3
					L ≤ 4 ± 0.2
					ANGULAR ± 5°

For and on behalf of
KXB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

KXB INDUSTRIAL PRECISION CO., LIMITED

MODEL TYPE:	SCALE: N/A	DATE	DATE	DATE	DATE	SIZE: A4
DNSD						
DWN						
CHKD						
APPD						
PART NO.: 0.80 mm IDC Style Connectors						
DWG NO.:						
REVISION						
SHEET						
1/1						
WEIGHT						
1.0g						
A0						

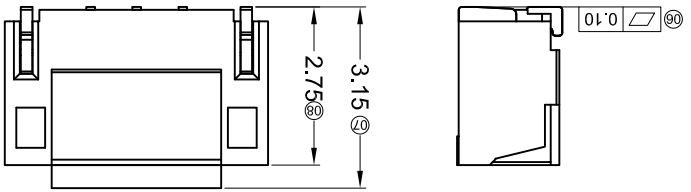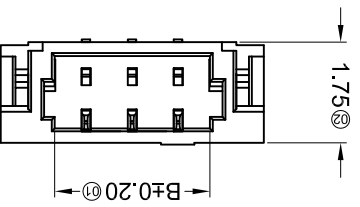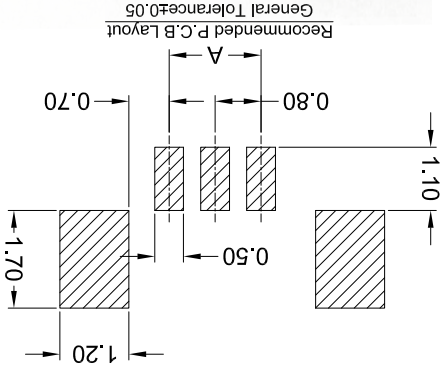

PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)
X0800WVS-XXHF-LPV01	LCP UL 94V-0	Phosphor Bronze	Tin-Plated	Phosphor Bronze	Tin-Plated
X0800WVS-XXHF-LPV01		Gold-Flash		Gold-Flash	

Poles	Dimensions (mm)					
	A	B	C	A	B	C
02	0.80	1.90	3.78	8.80	9.90	11.78
03	1.60	2.70	4.58	9.60	10.70	12.58
04	2.40	3.50	5.38	10.40	11.50	13.38
05	3.20	4.30	6.18	11.20	12.30	14.18
06	4.00	5.10	6.98	12.00	13.10	14.98
07	4.80	5.90	7.78	12.80	13.90	15.78
08	5.60	6.70	8.58	13.60	14.70	16.58
09	6.40	7.50	9.38	14.40	15.50	17.38
10	7.20	8.30	10.18	15.20	16.30	18.18
11	8.00	9.10	10.98			

- ① Series No
 - ② Category: W-WAFER
 - ③ Welding Board Angle: V-180°
 - ④ Welding Way: S-SMT
 - ⑤ Row No.-Pin No.: XX-Single Row
 - ⑥ Special No.: HF-Halogen Free
 - ⑦ Material: LP-LCP 94V-0
 - ⑧ Plating Category: V01-All Gold Flash
 - ⑨ Color: Blank-Natural Color
- ⑩ SN-Bright Tin Plating

X0800 W V S-XX HF-LP XX XX

- Voltage rating: 30V AC / DC
- Current rating: 0.5A AC / DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ

■ Specifications :

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)