
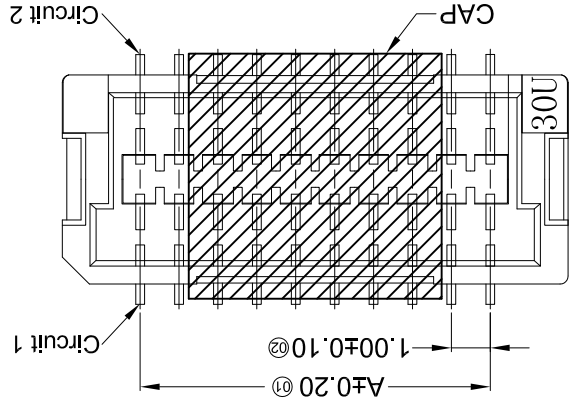
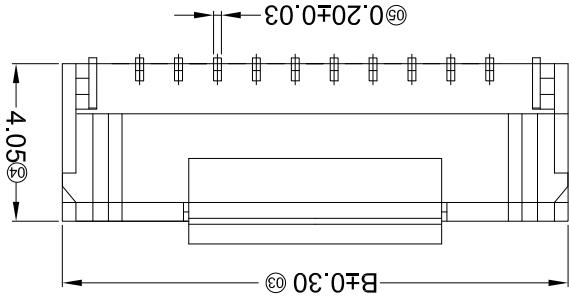


For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
 香港星坤工業精密有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
					L > 63	± 0.5
△ X					16 < L ≤ 63	± 0.4
△ X					4 < L ≤ 16	± 0.3
△ X					L ≤ 4	± 0.2
					ANGULAR	± 5°


REVISIONS	XKB INDUSTRIAL PRECISION CO., LIMITED	
DATE	APPD	DATE
REVIEWED	CHKD	DATE
APPROVED	DWN	DATE
UNSPECIFIED TOLERANCES	DSND	DATE

MODEL TYPE: X1011WVS-2*XX-9TV01	SCALE: N/A	VIEW:	UNIT: mm	SIZE: A4
PART NO.:				DWG NO.:
				1.00 mm Crimp Style Connectors
				WEIGHT 1.0g
				SHEET 1/1
				REVISION A0

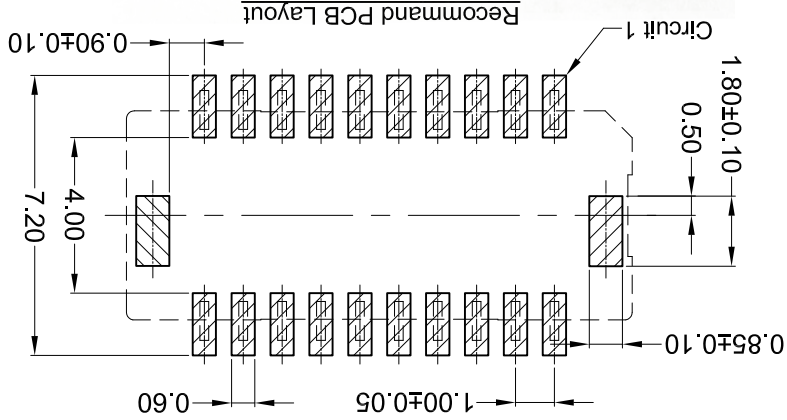

PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal
X1011WVS-2*XX-9TV01	PA9T UL 94V-0	Brass	Gold-Flash	X1011H

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
20	9.00	13.00	40	19.00	23.00
30	14.00	18.00	50	24.00	28.00



① Series No.
 ② Category: W-water
 ③ Welding Board Angle: V-180°
 ④ Welding Way: S-SMT
 ⑤ Row No.-Pin No.: 2*XX-Double Row
 ⑥ Plug the Pin & Special NO.
 ⑦ Material: 9T-PA9T 94V-0
 ⑧ Plating Category:
 V:All Gold-Plated
 G:Gold-Plated Contact
 ⑨ ⑩ Gold-Flash : "02-2u"; "03-3u"; "05-5u"
 "10-10u"; "15-15u"; "30-30u"; "50-50u"
 "10-10u"; "15-15u"; "30-30u"; "50-50u"
 SN-Bright tin plating 70-120u"
 SN1-Bright tin plating 120u"Min.
 SW-Fog Tin plating : HS-High temperature Tin
 ⑪ Color: Blank-natural color

- Specifications :
- Voltage rating: 50V AC / DC
 - Current rating: 1A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥100MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing: ≤40mΩ

X1011 W V S-2*XX X-9T V01 XX

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)