
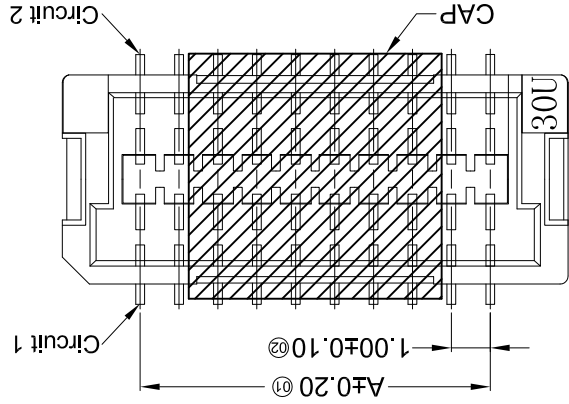
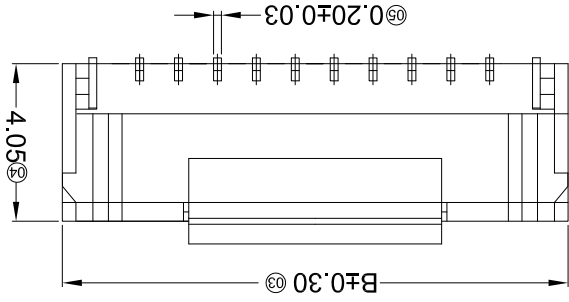


For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
 香港星坤工業精密有限公司

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES | |
|------|-------------|------|---------|----------|------------------------|-------|
| | | | | | L > 63 | ± 0.5 |
| △ X | | | | | 16 < L ≤ 63 | ± 0.4 |
| △ X | | | | | 4 < L ≤ 16 | ± 0.3 |
| △ X | | | | | L ≤ 4 | ± 0.2 |
| | | | | | ANGULAR | ± 5° |


| REVISIONS | XKB INDUSTRIAL PRECISION CO., LIMITED | |
|------------------------|---------------------------------------|------|
| DATE | APPD | DATE |
| REVIEWED | CHKD | DATE |
| APPROVED | DWN | DATE |
| UNSPECIFIED TOLERANCES | DSND | DATE |

| | | | | |
|---------------------------------|------------|-------|----------|--------------------------------|
| MODEL TYPE: X1011WVS-2*XX-9TV01 | SCALE: N/A | VIEW: | UNIT: mm | SIZE: A4 |
| PART NO.: | | | | DWG NO.: |
| | | | | 1.00 mm Crimp Style Connectors |
| | | | | WEIGHT 1.0g |
| | | | | SHEET 1/1 |
| | | | | REVISION A0 |

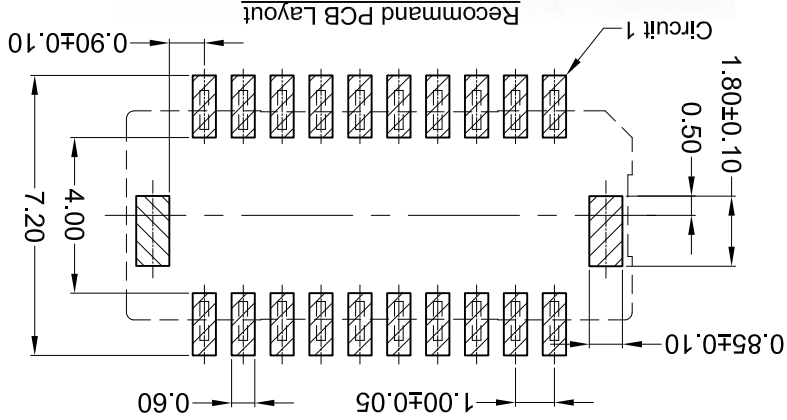

| PART NO | Material | Material(Pin) | Finish(Pin) | Suitable XKB Terminal |
|---------------------|---------------|---------------|-------------|-----------------------|
| X1011WVS-2*XX-9TV01 | PA9T UL 94V-0 | Brass | Gold-Flash | X1011H |

| Poles | Dimensions (mm) | | Poles | Dimensions (mm) | |
|-------|-----------------|-------|-------|-----------------|-------|
| | A | B | | A | B |
| 20 | 9.00 | 13.00 | 40 | 19.00 | 23.00 |
| 30 | 14.00 | 18.00 | 50 | 24.00 | 28.00 |



① Series No.
 ② Category: W-water
 ③ Welding Board Angle: V-180°
 ④ Welding Way: S-SMT
 ⑤ Row No.-Pin No.: 2*XX-Double Row
 ⑥ Plug the Pin & Special NO.
 ⑦ Material: 9T-PA9T 94V-0
 ⑧ Plating Category:
 V:All Gold-Plated
 G:Gold-Plated Contact
 ⑨ ①-Gold Flash: *02-2u"; *03-3u"; *05-5u"
 *10-10u"; *15-15u"; *30-30u"; *50-50u"
 SN-Bright tin plating 70-120u"
 SN1-Bright tin plating 120u"Min.
 SW-Fog Tin plating: HS-High temperature Tin
 ⑩ Color: Blank-natural color

- Specifications:
- Voltage rating: 50V AC / DC
 - Current rating: 1A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥100MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing: ≤40mΩ

X1011 W V S-2*XX X-9T V01 XX

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)