

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
 香港星坤工業精密有限公司

REVISIONS
 Authorized Signatures(s)






MARK	DESCRIPTION	DATE	REVISD	APPROVED	UNSPECIFIED TOLERANCES
△ X					$L > 63$ ± 0.5
△ X					$16 < L \leq 63$ ± 0.4
△ X					$4 < L \leq 16$ ± 0.3
△ X					$L \leq 4$ ± 0.2
					ANGULAR $\pm 5^\circ$

REVISION	SHEET	WEIGHT	SIZE	DATE	DATE	DATE	DATE	DATE
A0	1/1	1.0g	A4					

XKB INDUSTRIAL PRECISION CO., LIMITED

MODEL TYPE	SCALE	VIEW	UNIT	DWG NO.:
X1224WRS-XX-XXV01	N/A	VIEW:	mm	1.20mm Crimp Style Connectors

DSND	CHKD	APPD
DATE	DATE	DATE

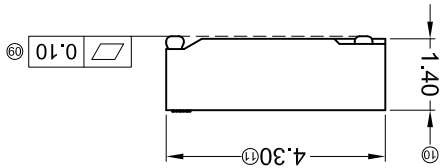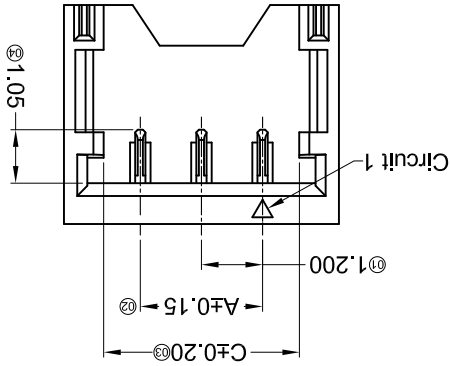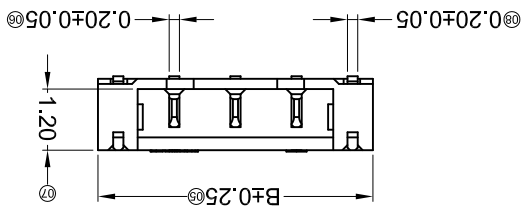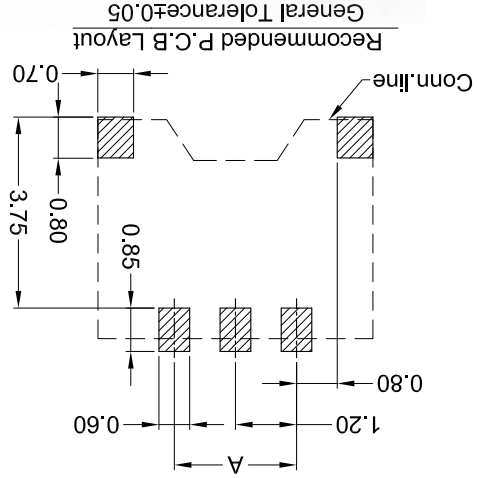

PART NO	Material	Material(Pin)	Finish(Pin)	(Solder Tabs) (Solder Tabs)	Material	Material	Finish
X1224WRS-XX-LPV01	LCP UL 94V-0	Phosphos Bronze	Gold-Flash	Brass	Tin Plating Matte	Brass	Tin Plating Matte
PA4T UL 94V-0	Phosphos Bronze	Gold-Flash	Brass	Brass	Tin Plating Matte	Brass	Tin Plating Matte

Suitable XKB Terminal

Poles	Dimensions(mm)	
	A	B
02	1.20	4.20
03	2.40	5.40
		3.84

- ① Series No.
 ② Category: W-water
 ③ Welding Board Angle: R-Right Angle 90°
 ④ Welding Way: S-SMT
 ⑤ Row No.-Pin No.: XX-04P~07P
 ⑥ Plug the Pin & Special NO.:
 ⑦ Material: LP-LCP 94V-0 ; 4T-PA4T
 ⑧ Plating Category: V01: All Gold Flash
 ⑨ Color: Blank-Natural Color Black
- X1224 W R S-XX X- XX V01 XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- Specifications :
- Voltage rating: 50V AC / DC
 - Current rating: 2.0A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: $\geq 100M\Omega$
 - Contact resistance: $\leq 20m\Omega$
 - After environmental testing: $\leq 40m\Omega$







For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
 香港星坤工業精密有限公司

REVISIONS
 Authorized Signature(s)

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES		APPD	DATE	SIZE: A4	WEIGHT	SHEET	REVISION
					L > 63	±0.5						
△ X					16 < L ≤ 63	±0.4				1.0g	1/1	A0
△ X					4 < L ≤ 16	±0.3						
△ X					L ≤ 4	±0.2						
△ X					ANGULAR	±5°						

DSND	DATE	SCALE: N/A	MODEL TYPE: X1224T-PV01
DWN	DATE <td>VIEW: </td> <td>PART NO.:</td>	VIEW:	PART NO.:
CHKD	DATE <td>UNIT: mm</td> <td>DWG NO.:</td>	UNIT: mm	DWG NO.:
APPD	DATE <td>SIZE: A4</td> <td></td>	SIZE: A4	

PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal
X1224T-PV01	Phosphor Bronze	AWG#28-30	0.70mm (Max.)	Stamping Before Plating: 30u" Ni:Whole Gold : Gold Flash	X1224H

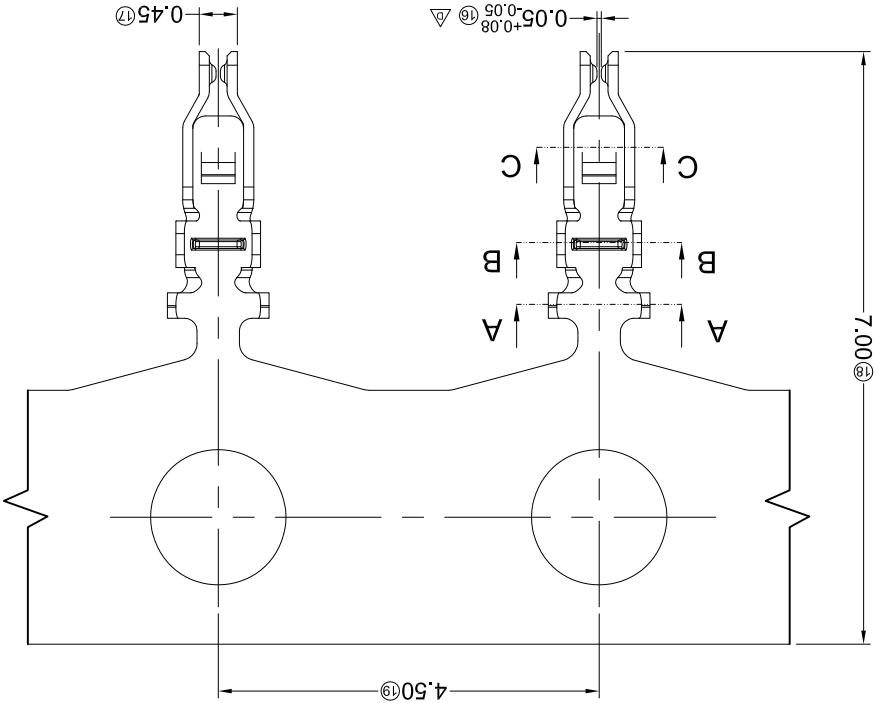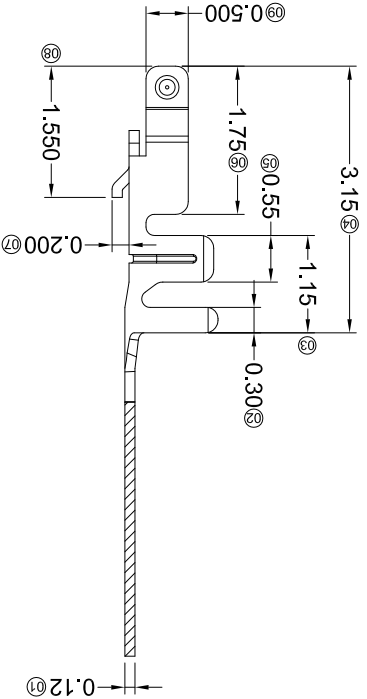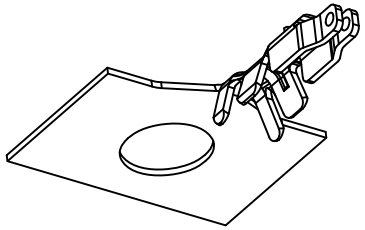






- Specifications :**
- Voltage rating: 50V AC / DC
 - Current rating: 2A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥100MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing: ≤40mΩ
- X1224 T X-P V01 X**
- ① Series Number
 - ② Category: T-terminal
 - ③ Shape: Blank-ordinary
 - ④ Material: P-Phosphor bronze
 - ⑤ Plating style: V01- All Gold Flash
 - ⑥ Plating method: Blank-Stamping before plating

For and on behalf of
KXB INDUSTRIAL PRECISION CO., LIMITED
 香港星坤工業精密有限公司

REVISIONS
 Authorized Signature(s)

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					L > 63 ±0.5
△ X					16 < L ≤ 63 ±0.4
△ X					4 < L ≤ 16 ±0.3
△ X					L ≤ 4 ±0.2
					ANGULAR ±5°

DSND	DATE	SCALE: N/A	MODEL TYPE: X1224H-XXHF-XX
APPD <td></td> <td>SIZE: A4</td> <td></td>		SIZE: A4	
CHKD <td></td> <td>UNIT: mm</td> <td>DWG NO.:</td>		UNIT: mm	DWG NO.:
DWN <td></td> <td>VIEW: </td> <td>PART NO.:</td>		VIEW:	PART NO.:
			1.20 mm Crimp Style Connectors
			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

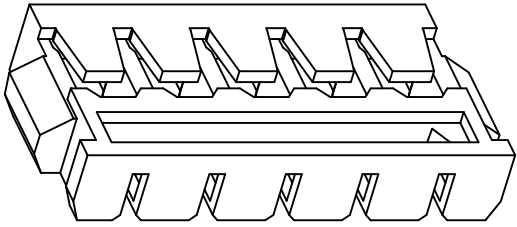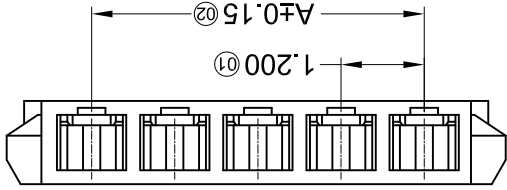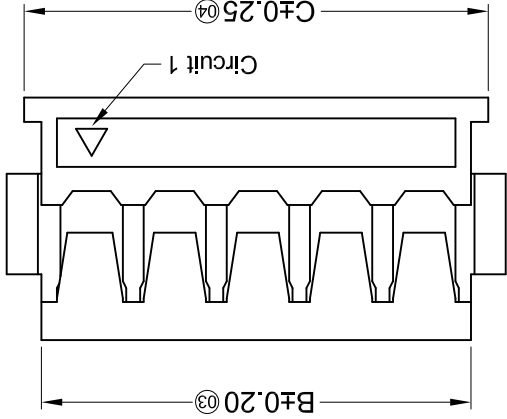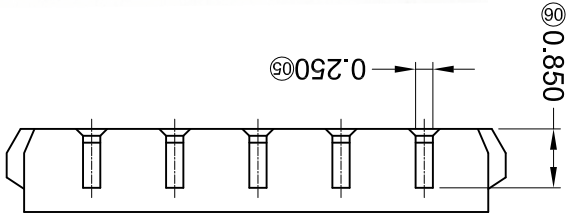

PART NO	Material	Suitable XKB Terminal
X1224H-XX-46	PA 46 UL 94V-0	Suitable XKB Terminal
X1224H-XX-LP	LCP UL 94V-0	
X1224H-XXHF-LP	LCP UL 94V-0 Halogen Free	X1224W

Poles	Dimensions(mm)		
	A	B	C
02	1.20	2.60	3.10
03	2.40	3.80	4.30
04	3.60	5.00	5.50
05	4.80	6.20	6.70

X1224 H X-XX HF-XX XX

① Series No.

② Category: H-HSG

③ Welding Board Angle: Blank-ordinary

④ Row No.-Pin No.: XX-02P~05P

⑤ Plug the Pin & special No.: HF-Halogen free

⑥ Material: 46-PA46 94V-0; LP-LCP

⑦ Color: Blank-Natural Color Black

- Specifications :**
- Voltage rating: 50V AC / DC
 - Current rating: 2A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥100MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing: ≤40mΩ

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)