


Specifications:

规格:
 Voltage rating:400V AC/DC
 额定电压: 400V AC/DC
 Current rating:10A AC/DC
 额定电流: 10A AC/DC
 Withstanding voltage:1800V AC/minute
 耐受电压: 1800V AC/分钟
 Temperature range:-40°C~+105°C
 温度范围: -40°C~+105°C
 Insulation resistance:100MΩ min
 绝缘电阻: 100MΩ Min
 Contact resistance:10mΩ Max
 接触电阻: 10mΩ Max


X2513 H - XX X - N0

① ② ③ ④ ⑤


- 1.Series No
- 2.Category:H-Housing
- 3.Row No.Pin No:XX-02~08P
- 4.Special No:A-A Key(Black);B-B Key(Natural)
- 5.Material:N0-PA66 94V-0





2PIN




3PIN




4PIN

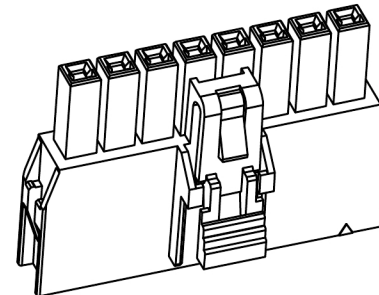


5PIN



6PIN



7PIN

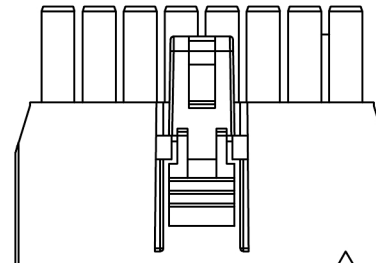

8PIN

Poles	Dimensions(mm)	
	A	B
02	7.70	2.50
03	10.20	5.00
04	12.70	7.50
05	15.20	10.00
06	17.70	12.50
07	20.20	15.00
08	22.70	17.50

X2513H-XXX-N0	PA66	X2513W	X2513T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

DSND	SCALE: N/A	MODEL TYPE: 2.50mm Crimp Style Connector
DWN	VIEW:	PART NO.: X2513H-XXX-N0
CHKD	UNIT: mm/in	DWG NO.: X-X2513H-XXX-N0
APPD	SIZE: A4	WEIGHT SHEET REVISION
		1/1 A0



XKB INDUSTRIAL PRECISION CO.,LIMITED

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5
UNSPECIFIED TOLERANCES	

ΔX					
ΔX					
ΔX					
MARK	DESCRIPTION	DATE	REVISED	APPROVED	
REVISIONS					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)