

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:500V AC/minute

耐受电压: 500V AC/分钟

Temperature range:-40℃-+105℃

温度范围: -40℃-+105℃

Insulation resistance:≥100MΩ

绝缘电阻: ≥100MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

X1270 H 2 -2xXX -PT V01

① ② ③ ④ ⑤ ⑥

1.Series No










2.Category:H-HSG

3.2:With hook

4.Row No-Pin No:2xXX-2x03P~2x40P

5.Material:PT:PBT UL94V-0

6.Plating Category: V01-All Gold Flash

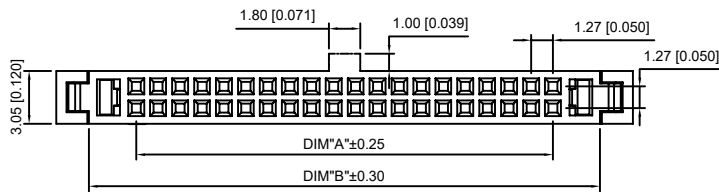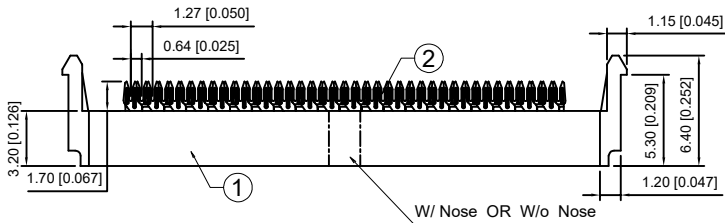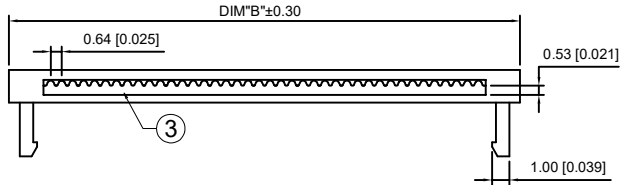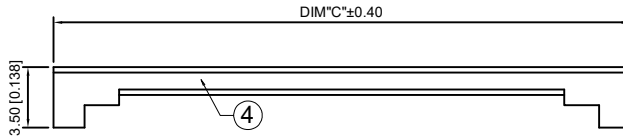

XXB Connectivity

| NUMBER OF POSITIONS | DIMENSION | | |
|---------------------|-----------|-------|-------|
| | A | B | C |
| 06 | 2.54 | 8.00 | 11.80 |
| 08 | 3.81 | 9.27 | 13.07 |
| 10 | 5.08 | 10.54 | 14.34 |
| 12 | 6.35 | 11.81 | 15.61 |
| 14 | 7.62 | 13.08 | 16.88 |
| 16 | 8.89 | 14.35 | 18.15 |
| 20 | 11.43 | 16.89 | 20.69 |
| 24 | 13.97 | 19.43 | 23.23 |
| 26 | 15.24 | 20.70 | 24.50 |
| 30 | 17.78 | 23.24 | 27.04 |
| 32 | 19.05 | 24.51 | 28.31 |
| 34 | 20.32 | 25.78 | 29.58 |

| | | | |
|----|-------|-------|-------|
| 36 | 21.59 | 27.05 | 30.85 |
| 40 | 24.13 | 29.59 | 33.39 |
| 44 | 26.67 | 32.13 | 35.93 |
| 50 | 30.48 | 35.94 | 39.74 |
| 60 | 36.83 | 42.29 | 46.09 |
| 64 | 39.37 | 44.83 | 48.63 |
| 66 | 40.64 | 46.10 | 49.90 |
| 68 | 41.91 | 47.37 | 51.17 |
| 70 | 43.18 | 48.64 | 52.44 |
| 74 | 45.72 | 51.18 | 54.98 |
| 76 | 46.99 | 52.45 | 56.25 |
| 80 | 49.53 | 54.99 | 58.79 |

| X1270H2-2xXX-PTV01 | PBT UL 94V-0 | Phosphor Bronze | Gold Flash | X1270W |
|--------------------|--------------|-------------------------------|-----------------------------|-----------------------|
| PART NO | Material | Material(Pin And Solder Tabs) | Finish(Pin And Solder Tabs) | Suitable XKB Terminal |

| | | |
|------|-------------|--|
| DSND | SCALE: N/A | MODEL TYPE: 1.27mm BTB Style Connectors |
| DWN | VIEW: | PART NO.: |
| CHKD | UNIT: mm/in | DWG NO.: |
| APPD | SIZE: A4 | X1270H2-2xXX-PTV01 |
| | | WEIGHT |
| | | SHEET |
| | | REVISION |
| | | 1/1 |
| | | A0 |



XKB INDUSTRIAL PRECISION CO.,LIMITED

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|------|-------------|------|---------|----------|------------------------|
| ΔX | | | | | ANGULAR ±5° |
| ΔX | | | | | L ≤ 4 ±0.2 |
| ΔX | | | | | 4 < L ≤ 16 ±0.3 |
| | | | | | 16 < L ≤ 63 ±0.4 |
| | | | | | L > 63 ±0.5 |

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[571763P](#) [61-168618-12P](#) [D20419-211](#) [72.250.1628.2](#) [72.250.2428.2](#) [76.350.0729.0](#) [76871-1403](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [PCS-XES68MS+](#) [G38A71314B](#) [9776-18-6](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDMR-29-01-S-SM-TR](#) [HDRA-E68W1LFDTC-SL+](#) [54182-0605](#) [UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [500-1054](#) [ZP-4008-66L](#) [10-565995-597N](#) [10-584459-12P](#) [5554841-1](#) [SM3106F14S-7S-LC](#) [U90B3054061110](#) [U65-E04-4020](#) [ZPF00000000097891](#) [557-262M2-06C](#) [PCS-96LFD+](#) [60-042222-02S](#) [10099439-003C-TRLF](#) [226-0348-000](#) [10137239-0021LF](#)