
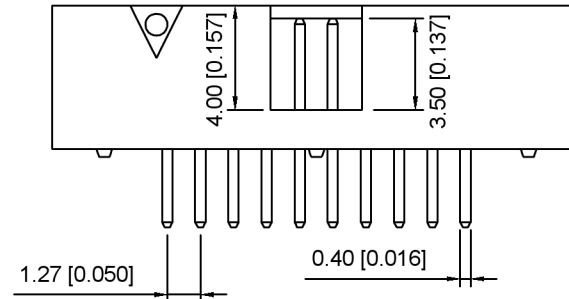



Straight Type

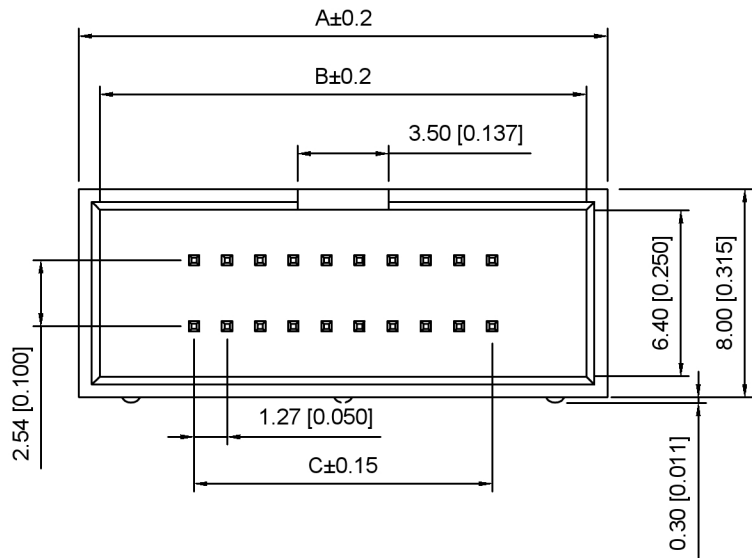


Voltage rating:500V AC/DC  
 额定电压:500V AC/DC  
 Current rating:1.0A  
 额定电流:1.0A  
 Insulation resistance:1000MΩ Min  
 绝缘电阻:1000MΩ Min  
 Withstanding voltage:≥500V AC/minute  
 耐压:≥500V/分钟  
 Temperature range:-40℃~+105℃  
 使用温度:-40℃~+105℃

X1270 W V -2xXX A2 - 6T V01  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category:W-wafer
- ③ Welding Board Angle:V- Straight 180°
- ④ Row No.-Pin No.:2xXX-2x04P~2x40P
- ⑤ A2:1.27x2.54mm No gaps
- ⑥ Material:6T-Nylon PA6T UL94V-0
- ⑦ Planting Category:V01-All Gold Flash

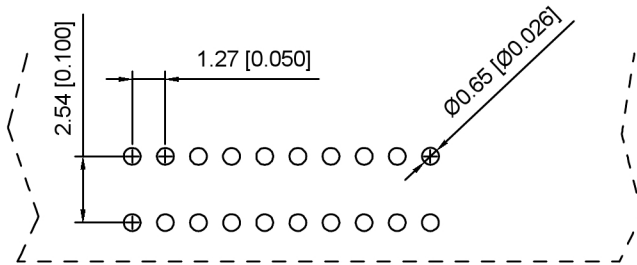

P.C.B Layout

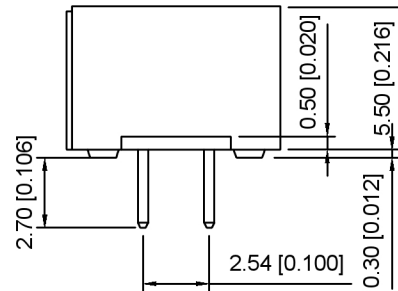

| positior | A     | B     | C     |
|----------|-------|-------|-------|
| 2x04     | 12.64 | 11.04 | 3.81  |
| 2x05     | 13.91 | 12.31 | 5.08  |
| 2x06     | 15.18 | 13.58 | 6.35  |
| 2x07     | 16.45 | 14.85 | 7.62  |
| 2x08     | 17.72 | 16.12 | 8.89  |
| 2x10     | 20.26 | 18.66 | 11.43 |
| 2x13     | 24.07 | 22.47 | 15.24 |
| 2x15     | 26.61 | 25.01 | 17.78 |
| 2x17     | 29.15 | 27.55 | 20.32 |
| 2x20     | 32.96 | 31.36 | 24.13 |
| 2x22     | 35.50 | 33.90 | 26.67 |
| 2x25     | 39.31 | 37.71 | 30.48 |
| 2x30     | 45.66 | 44.06 | 36.83 |
| 2x33     | 48.20 | 46.60 | 39.37 |
| 2x34     | 50.74 | 49.14 | 41.91 |
| 2x40     | 58.36 | 56.76 | 49.53 |

广东星坤科技股份有限公司

|      |                        |             |
|------|------------------------|-------------|
| ΔX   | 生效                     | 日期          |
| ΔX   |                        |             |
| ΔX   |                        |             |
| MARK | 文件工程草                  | DESCRIPTION |
|      | REVISIONS              | DATE        |
|      | REVISED                | APPROVED    |
|      | UNSPECIFIED TOLERANCES |             |

|             |      |
|-------------|------|
| ANGLAR      | ±5°  |
| L ≤ 4       | ±0.2 |
| 4 < L ≤ 16  | ±0.3 |
| 16 < L ≤ 63 | ±0.4 |
| L > 63      | ±0.5 |



XKB INDUSTRIAL PRECISION CO., LIMITED

|      |             |                                    |
|------|-------------|------------------------------------|
| DSND | SCALE: N/A  | MODEL TYPE:<br>1.27x2.54mm         |
| DWN  | VIEW: ①     | PART NO.:<br>X1270WV-2xXXA2-6TV01  |
| CHKD | UNIT: mm/in | DWG NO.:<br>X-X1270WV-2xXXA2-6TV01 |
| APPD | SIZE: A4    | WEIGHT                             |
|      |             | SHEET                              |
|      |             | REVISION                           |
|      |             | 1/1                                |
|      |             | A0                                 |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Connectors](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[571763P](#) [61-168618-12P](#) [D20419-211](#) [72.250.1628.2](#) [72.250.2428.2](#) [76.350.0729.0](#) [76871-1403](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [PCS-XES68MS+](#) [G38A71314B](#) [9776-18-6](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [91-644626-35P](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDMR-29-01-S-SM-TR](#) [HDRA-E68W1LFDTC-SL+](#) [54182-0605](#) [UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [500-1054](#) [ZP-4008-66L](#) [10-565995-597N](#) [10-584459-12P](#) [5554841-1](#) [SM3106F14S-7S-LC](#) [SM3106R18-18S](#) [U90B3054061110](#) [U65-E04-4020](#) [ZPF000000000097891](#) [557-262M2-06C](#) [PCS-96LFD+](#) [60-042222-02S](#) [10099439-003C-TRLF](#)