



Voltage rating:250V AC/DC
 额定电压: 250V AC/DC
 Current rating:1.0A
 额定电流: 1.0A
 Insulation resistance:1000MΩ Min
 绝缘电阻: 1000MΩ Min
 Withstanding voltage:≥500V AC/minute
 耐压: ≥500VC/分钟
 Temperature range:-40℃-+250℃
 使用温度: -40℃-+250℃



X1270 W V -2xXX B1 - 9T AuSn
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category:W-wafer
- ③ Welding Board Angle:V- Straight 180°
- ④ Row No.-Pin No.:2xXX-2x03P~2x32P
- ⑤ B1:Type B Contains gaps
- ⑥ Material:PA9T-Nylon PA9T UL94V-0
- ⑦ Planting Category:AuSn-Plating AuSn

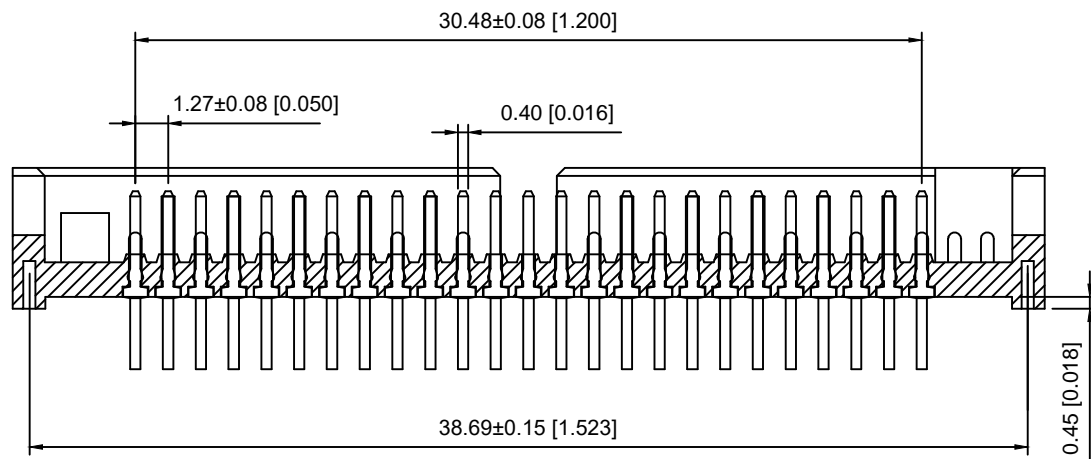

					ANGLAR	±5°	XKLB	DSND	SCALE: N/A	MODEL TYPE: 1.27mm B		
ΔX					L ≤ 4	±0.2		DWN	VIEW:	PART NO.: X1270WV-2xXXB1-9TAuSn		
ΔX					4 < L ≤ 16	±0.3		CHKD	UNIT: mm/in	DWG NO.:		
ΔX					16 < L ≤ 63	±0.4		APPD	SIZE: A4	X-X1270WV-2xXXB1-9TAuSn		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5	XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
REVISIONS					UNSPECIFIED TOLERANCES						1/1	A0
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn												

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)