

Voltage rating:500V AC/DC

额定电压:500V AC/DC

Current rating:1.0A

额定电流:1.0A

Insulation resistance:1000MΩ Min

绝缘电阻:1000MΩ Min

Withstanding voltage:≥500V AC/minute

耐压:≥500VC/分钟

Temperature range:-40℃-+105℃

使用温度:-40℃-+105℃

X1270 W V S -2xXX A2 -6T XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② Category:W-wafer

③ Welding Board Angle:V- Straight 180°



④ Welding Way:S-SMT

⑤ Row No.-Pin No.:2xXX-2x04P~2x40P

⑥ A2:1.27x2.54mm

⑦ Material:6T-Nylon PA6T UL94V-0

⑧ Planting Category:V01-Gold Plating Or Sn-Tin Plating

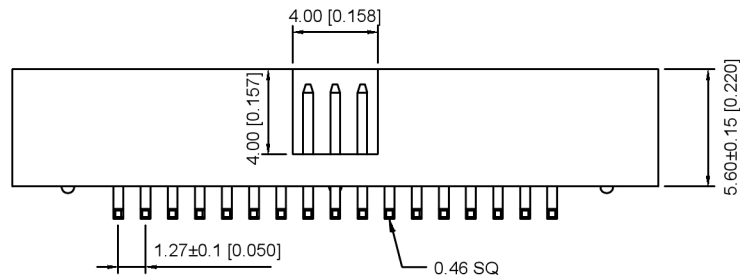

广东星坤科技股份有限公司

ΔX	生效	日期
ΔX		
ΔX		
MARK	DESCRIPTION	DATE

文件工程章

REVISIONS UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5



DSND	SCALE: N/A	MODEL TYPE: 1.27x2.54mm
DWN	VIEW:	PART NO.: X1270WVS-2xXXA2-6TXX
CHKD	UNIT: mm/in	DWG NO.: X-X1270WVS-2xXXA2-6TXX
APPD	SIZE: A4	WEIGHT SHEET REVISION 1/1 A0

XKB INDUSTRIAL PRECISION CO.,LIMITED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[571763P](#) [61-168618-12P](#) [D20419-211](#) [72.250.1628.2](#) [72.250.2428.2](#) [76.350.0729.0](#) [76871-1403](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [PCS-XES68MS+](#) [G38A71314B](#) [9776-18-6](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [91-644626-35P](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDMR-29-01-S-SM-TR](#) [HDRA-E68W1LFDTC-SL+](#) [54182-0605](#) [UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [500-1054](#) [ZP-4008-66L](#) [10-565995-597N](#) [10-584459-12P](#) [5554841-1](#) [SM3106F14S-7S-LC](#) [SM3106R18-18S](#) [U90B3054061110](#) [U65-E04-4020](#) [ZPF000000000097891](#) [557-262M2-06C](#) [PCS-96LFD+](#) [60-042222-02S](#) [10099439-003C-TRLF](#)