

Voltage rating:500V AC/DC

额定电压:500V AC/DC

Current rating:1.0A

额定电流:1.0A

Insulation resistance:1000MΩ Min

绝缘电阻:1000MΩ Min

Withstanding voltage:≥500V AC/minute

耐压:≥500VC/分钟

Temperature range:-40℃-+105℃

使用温度:-40℃-+105℃

X1270 W V S -2xXX A2 -6T XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② Category:W-wafer

③ Welding Board Angle:V- Straight 180°



④ Welding Way:S-SMT

⑤ Row No.-Pin No.:2xXX-2x04P~2x40P

⑥ A2:1.27x2.54mm

⑦ Material:6T-Nylon PA6T UL94V-0

⑧ Planting Category:V01-Gold Plating Or Sn-Tin Plating

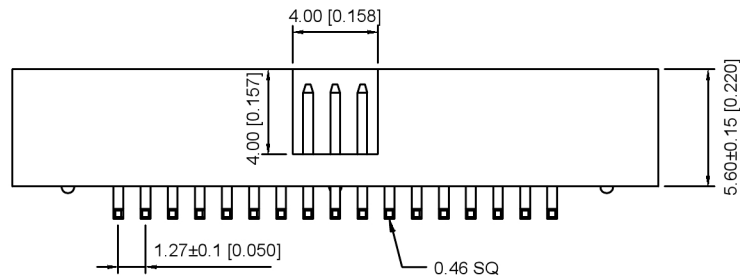

广东星坤科技股份有限公司

ΔX	生效	日期
ΔX		
ΔX		
MARK	DESCRIPTION	DATE

文件工程章

REVISIONS UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5



XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND	SCALE: N/A	MODEL TYPE: 1.27x2.54mm
DWN	VIEW:	PART NO.: X1270WVS-2xXXA2-6TXX
CHKD	UNIT: mm/in	DWG NO.: X-X1270WVS-2xXXA2-6TXX
APPD	SIZE: A4	WEIGHT SHEET REVISION 1/1 A0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)