


Specifications:

1. Voltage rating: 250VAC/DC
2. Current rating: 1A AC/DC
3. Withstanding voltage: 1000V AC/minute
4. Temperature range: -40°C to +105°C
5. Insulation resistance: ≥ 500MΩ Min
6. Contact resistance: ≤ 20MΩ Max
7. Material: PA6T 94V-0
8. Plating Category: 1U" Gold
9. Reflow Soldering temperature: 260 ± 5°C, 10S
10. Operating Category: -40°C to +105°C

X1321 WR -2*XX J-C40-D18

- ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series NO.
- ② Category: W-wafer
- ③ Welding Board Angle: R-Right Angle 90°
- ④ Row No-Pin No: 2*xx-01p-40p
- ⑤ Plastic height: J=1.0mm
- ⑥ Pin height: C=4.0mm
- ⑦ Pin height: D=1.8mm

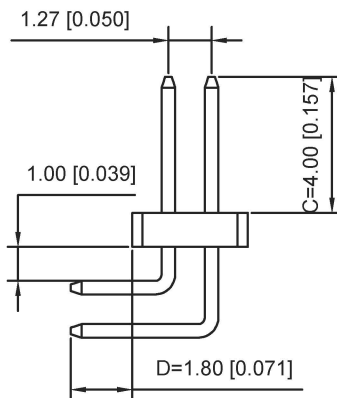

X1321WR-2*XXJ-C40D18	PA6T 94V-0	Brass	1U" Gold	X1321F
PART NO	Material	Material(Terminal)	Finish(Terminal)	Suitable XKB Terminal

P.C.B LAYOUT

广东星坤科技股份有限公司

生效	ΔX	日期				
	ΔX	日期				
	MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

文件工程章

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	X1321WR-2*XXJ-C40D18
CHKD	DATE	UNIT: mm/in	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED			X1321FVS-2*XXJ-C43D48
WEIGHT	SHEET	REVISION	
1.0g	1/1	A0	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#)
[63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)
[65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#) [80.063.4001.1](#)
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-](#)
[001000](#)