



For and on behalf of  
**KXB INDUSTRIAL PRECISION CO., LIMITED**  
 香港星坤工業精密有限公司


MARK	DESCRIPTION	REVISIONS			UNSPECIFIED TOLERANCES	
		DATE	REVISED	APPROVED	L > 63	± 0.5
△ X					16 > L ≤ 63	± 0.4
△ X					4 < L ≤ 16	± 0.3
△ X					L ≤ 4	± 0.2
					ANGULAR	± 5°

**KXB INDUSTRIAL PRECISION CO., LIMITED**





WEIGHT	1.0g	REVISION	A0
SHEET	1/1		
SIZE: A4		DATE	
UNIT: mm		DATE	
VIEW: 		DATE	
SCALE: N/A		DATE	
MODEL TYPE: X2009WRS-XX-9TSW			
PART NO.:			
2.00mm Crimp Style Connectors			
DWG NO.:			




5P

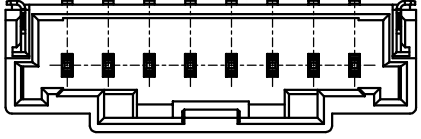



8P

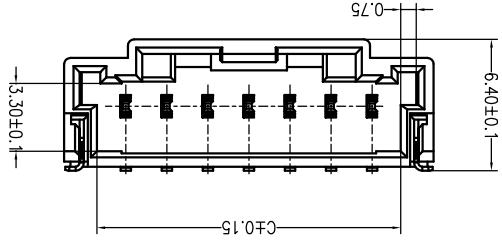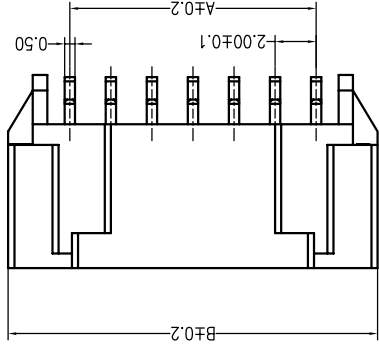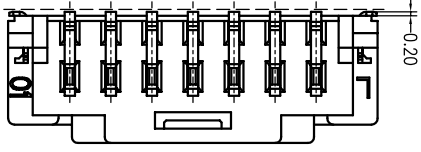


3P



2P

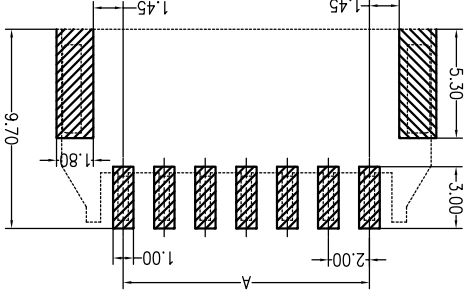

PCB LAYOUT



PART NO	Material	PA9T UL 94V-0	Brass	Tin-Plated	Brass	Tin-Plated	Material (Solder Tabs)	Finish (Pfn)	Material (Solder Tabs)	Finish (Pfn)	Material (Solder Tabs)	Suitable XKB Terminal	Dimensions (mm)		
													A	B	C
08	14.00	20.00	16.80	15	28.00	34.00	30.80					X2009H			
07	12.00	18.00	14.80	14	26.00	32.00	28.80								
06	10.00	16.00	12.80	13	24.00	30.00	26.80								
05	8.00	14.00	10.80	12	22.00	28.00	24.80								
04	6.00	12.00	8.80	11	20.00	26.00	22.80								
03	4.00	10.00	6.80	10	18.00	24.00	20.80								
02	2.00	8.00	4.80	09	16.00	22.00	18.80								

X2009 W R S-XX 9T SW  
 ① Series No.  
 ② Category: W-WAFER  
 ③ Welding Board Angle: R-Right Angle 90°  
 ④ Welding Way: S-SMT  
 ⑤ Row No.-Pin No.: XX-02P~15P  
 ⑥ Material: 9T -PA9T 94V-0  
 ⑦ Plating Category: SW-Fog Tin plating

- Specifications :
- Voltage rating: 125 V AC / DC
  - Current rating: 3 A AC / DC
  - Withstanding voltage: 500 V AC/minute
  - Temperature range: -45 ~ +105
  - Insulation resistance: ≥1000MΩ
  - Contact resistance: ≤10mΩ
  - After environmental testing: ≤20mΩ

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)