

For and on behalf of  
**XKB INDUSTRIAL PRECISION CO., LIMITED**  
 香港星坤工業精密有限公司  
 REVISIONS  
 Authorized Signatures(s)






MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					L > 63 ± 0.5
△ X					16 < L ≤ 63 ± 0.4
△ X					4 < L ≤ 16 ± 0.3
△ X					L ≤ 4 ± 0.2
					ANGULAR ± 5°

REVISION	SHEET	WEIGHT	WARRANTY	DATE	DATE	DATE	DATE	DATE	DATE
A0	1/1	1.0g							

**XKB INDUSTRIAL PRECISION CO., LIMITED**

APPD	DATE	DATE	DATE	DATE	DATE
CHKD	DATE	DATE	DATE	DATE	DATE
DWN	DATE	DATE	DATE	DATE	DATE
DSND	DATE	DATE	DATE	DATE	DATE

MODEL TYPE: X2026WV-2\*XXD-XXXXX  
 PART NO.: X2026WV-2\*XXD-XXXXX  
 DWG NO.:  
 SIZE: A4  
 UNIT: mm  
 VIEW:

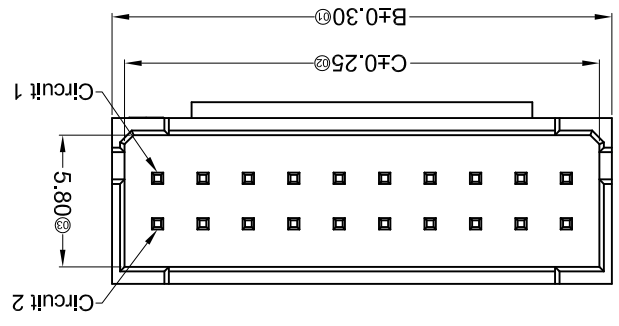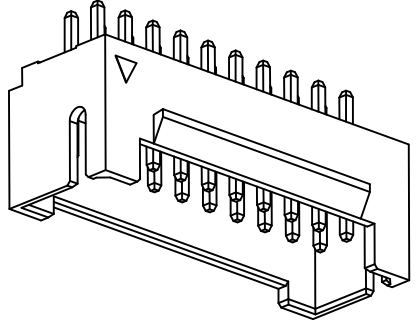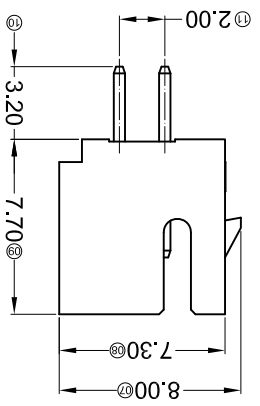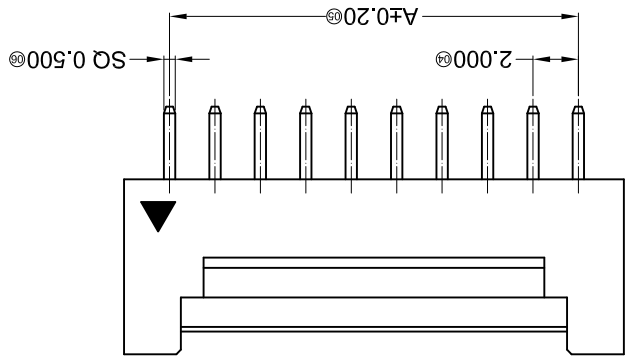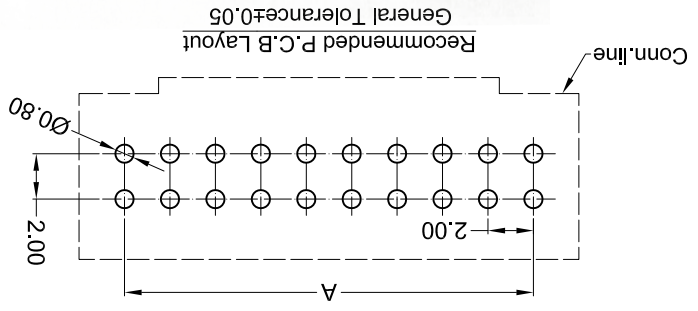

PART NO	Material	Material (Fin)	Finish (Fin)	Suitable XKB Terminal
X2026WV-2*XXD-46SN	PA46 94V-0		Tin-Plated	X2026H-D
X2026WV-2*XXD-9T*V03	PA9T 94V-0		Gold-Plated 3u"	X2026H-D
X2026WV-2*XXD-4T*SN	PA4T 94V-0		Tin-Plated	X2026H-D

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*02	2.00	6.00	2*09	18.00	2*16	30.00	34.00
2*03	4.00	8.00	2*10	18.00	22.00	20.90	32.00
2*04	6.00	10.00	2*11	20.00	22.90	2*17	34.90
2*05	8.00	12.00	2*12	22.00	24.90	30.00	32.90
2*06	10.00	14.00	2*13	24.00	26.90	32.00	34.90
2*07	12.00	16.00	2*14	26.00	28.90	33.00	36.90
2*08	14.00	18.00	2*15	28.00	30.00	34.00	38.90
	16.00	20.00	2*16	30.00	32.00	35.00	40.90
	18.00	22.00	2*17	32.00	34.00	36.00	42.00
	20.00	24.00	2*18	34.00	36.00	37.00	43.00
	22.00	26.00	2*19	36.00	38.00	38.00	44.00
	24.00	28.00	2*20	38.00	40.00	39.00	45.00
	26.00	30.00	2*21	40.00	42.00	40.00	46.00
	28.00	32.00	2*22	42.00	44.00	41.00	47.00
	30.00	34.00	2*23	44.00	46.00	42.00	48.00
	32.00	36.00	2*24	46.00	48.00	43.00	49.00
	34.00	38.00	2*25	48.00	50.00	44.00	50.00
	36.00	40.00	2*26	50.00	52.00	45.00	51.00
	38.00	42.00	2*27	52.00	54.00	46.00	52.00
	40.00	44.00	2*28	54.00	56.00	47.00	53.00
	42.00	46.00	2*29	56.00	58.00	48.00	54.00
	44.00	48.00	2*30	58.00	60.00	49.00	55.00
	46.00	50.00	2*31	60.00	62.00	50.00	56.00
	48.00	52.00	2*32	62.00	64.00	51.00	57.00
	50.00	54.00	2*33	64.00	66.00	52.00	58.00
	52.00	56.00	2*34	66.00	68.00	53.00	59.00
	54.00	58.00	2*35	68.00	70.00	54.00	60.00
	56.00	60.00	2*36	70.00	72.00	55.00	61.00
	58.00	62.00	2*37	72.00	74.00	56.00	62.00
	60.00	64.00	2*38	74.00	76.00	57.00	63.00
	62.00	66.00	2*39	76.00	78.00	58.00	64.00
	64.00	68.00	2*40	78.00	80.00	59.00	65.00
	66.00	70.00	2*41	80.00	82.00	60.00	66.00
	68.00	72.00	2*42	82.00	84.00	61.00	67.00
	70.00	74.00	2*43	84.00	86.00	62.00	68.00
	72.00	76.00	2*44	86.00	88.00	63.00	69.00
	74.00	78.00	2*45	88.00	90.00	64.00	70.00
	76.00	80.00	2*46	90.00	92.00	65.00	71.00
	78.00	82.00	2*47	92.00	94.00	66.00	72.00
	80.00	84.00	2*48	94.00	96.00	67.00	73.00
	82.00	86.00	2*49	96.00	98.00	68.00	74.00
	84.00	88.00	2*50	98.00	100.00	69.00	75.00
	86.00	90.00	2*51	100.00	102.00	70.00	76.00
	88.00	92.00	2*52	102.00	104.00	71.00	77.00
	90.00	94.00	2*53	104.00	106.00	72.00	78.00
	92.00	96.00	2*54	106.00	108.00	73.00	79.00
	94.00	98.00	2*55	108.00	110.00	74.00	80.00
	96.00	100.00	2*56	110.00	112.00	75.00	81.00
	98.00	102.00	2*57	112.00	114.00	76.00	82.00
	100.00	104.00	2*58	114.00	116.00	77.00	83.00
	102.00	106.00	2*59	116.00	118.00	78.00	84.00
	104.00	108.00	2*60	118.00	120.00	79.00	85.00
	106.00	110.00	2*61	120.00	122.00	80.00	86.00
	108.00	112.00	2*62	122.00	124.00	81.00	87.00
	110.00	114.00	2*63	124.00	126.00	82.00	88.00
	112.00	116.00	2*64	126.00	128.00	83.00	89.00
	114.00	118.00	2*65	128.00	130.00	84.00	90.00
	116.00	120.00	2*66	130.00	132.00	85.00	91.00
	118.00	122.00	2*67	132.00	134.00	86.00	92.00
	120.00	124.00	2*68	134.00	136.00	87.00	93.00
	122.00	126.00	2*69	136.00	138.00	88.00	94.00
	124.00	128.00	2*70	138.00	140.00	89.00	95.00
	126.00	130.00	2*71	140.00	142.00	90.00	96.00
	128.00	132.00	2*72	142.00	144.00	91.00	97.00
	130.00	134.00	2*73	144.00	146.00	92.00	98.00
	132.00	136.00	2*74	146.00	148.00	93.00	99.00
	134.00	138.00	2*75	148.00	150.00	94.00	100.00
	136.00	140.00	2*76	150.00	152.00	95.00	101.00
	138.00	142.00	2*77	152.00	154.00	96.00	102.00
	140.00	144.00	2*78	154.00	156.00	97.00	103.00
	142.00	146.00	2*79	156.00	158.00	98.00	104.00
	144.00	148.00	2*80	158.00	160.00	99.00	105.00
	146.00	150.00	2*81	160.00	162.00	100.00	106.00
	148.00	152.00	2*82	162.00	164.00	101.00	107.00
	150.00	154.00	2*83	164.00	166.00	102.00	108.00
	152.00	156.00	2*84	166.00	168.00	103.00	109.00
	154.00	158.00	2*85	168.00	170.00	104.00	110.00
	156.00	160.00	2*86	170.00	172.00	105.00	111.00
	158.00	162.00	2*87	172.00	174.00	106.00	112.00
	160.00	164.00	2*88	174.00	176.00	107.00	113.00
	162.00	166.00	2*89	176.00	178.00	108.00	114.00
	164.00	168.00	2*90	178.00	180.00	109.00	115.00
	166.00	170.00	2*91	180.00	182.00	110.00	116.00
	168.00	172.00	2*92	182.00	184.00	111.00	117.00
	170.00	174.00	2*93	184.00	186.00	112.00	118.00
	172.00	176.00	2*94	186.00	188.00	113.00	119.00
	174.00	178.00	2*95	188.00	190.00	114.00	120.00
	176.00	180.00	2*96	190.00	192.00	115.00	121.00
	178.00	182.00	2*97	192.00	194.00	116.00	122.00
	180.00	184.00	2*98	194.00	196.00	117.00	123.00
	182.00	186.00	2*99	196.00	198.00	118.00	124.00
	184.00	188.00	2*100	198.00	200.00	119.00	125.00

- ① Series No. X2026 W V X-2\*XX D -XX XX XX ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
- ② Category: W-WAFER
- ③ Welding Board Angle: V-Straight 180°
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No.: 2\*XX-2\*04P~2\*30P
- ⑥ Plug the Pin & Special No.: D-With Lock in the middle
- ⑦ Material: 46 -PA46 94V-0, 9T-PA9T 94V-0,
- ⑧ 4T-PA4T 94V-0
- ⑨ Plating Category: SN-Bright Tin Plating, V03-All Gold-Plated 3u"
- ⑩ Color: Blank-Natural Color

- Specifications:
- Voltage rating: 250V AC / DC
  - Current rating: 3A AC / DC
  - Withstanding voltage: 1000V AC/minute
  - Temperature range: -25°C~+85°C
  - Insulation resistance: ≥1000MΩ
  - Contact resistance: ≤30mΩ
  - After environmental testing: ≤50mΩ

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)