
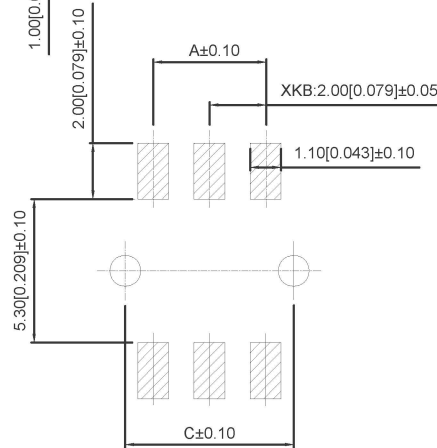



2P视图

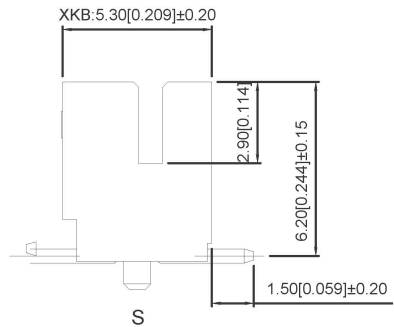

PCB LAYOUT

Specifications:

规格:
 Voltage rating: 250V AC/DC
 额定电压: 250V AC/DC
 Current rating: 3A AC/DC
 额定电流: 3A AC/DC
 Withstanding voltage: 800V AC/minute
 耐受电压: 800V AC/分钟
 Temperature range: -25°C~+85°C
 温度范围: -25°C~+85°C
 Insulation resistance: ≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance: ≤10mΩ
 接触电阻: ≤10mΩ
 After environmental testing: ≤20mΩ
 环境测试后: ≤20兆欧

X2026 W V S-2xXXS-9T SN XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

1. Series No
2. Category: W-WAFER
3. Welding Board Angle: V-Straight 180°
4. Welding Way: S-SMT
5. Row No-Pin No: 2xXX-2x02P~2x22P
6. S-With the column
7. Material: 9T-PA9T 94V-0
8. Plating Category: SN-Bright Tin Plating
9. Color: Blank-Natural Color

| poles | Dimensions(mm) | | | poles | Dimensions(mm) | | | Poles | Dimensions(mm) | | |
|-------|----------------|-------|-------|-------|----------------|-------|-------|-------|----------------|-------|-------|
| | A | B | C | | A | B | C | | A | B | C |
| 2x02 | 2.00 | 6.00 | 4.00 | 2x09 | 16.00 | 20.00 | 18.00 | 2x16 | 30.00 | 34.00 | 32.00 |
| 2x03 | 4.00 | 8.00 | 6.00 | 2x10 | 18.00 | 22.00 | 20.00 | 2x17 | 32.00 | 36.00 | 34.00 |
| 2x04 | 6.00 | 10.00 | 8.00 | 2x11 | 20.00 | 24.00 | 22.00 | 2x18 | 34.00 | 38.00 | 36.00 |
| 2x05 | 8.00 | 12.00 | 10.00 | 2x12 | 22.00 | 26.00 | 24.00 | 2x19 | 36.00 | 40.00 | 38.00 |
| 2x06 | 10.00 | 14.00 | 12.00 | 2x13 | 24.00 | 28.00 | 26.00 | | | | |
| 2x07 | 12.00 | 16.00 | 14.00 | 2x14 | 26.00 | 30.00 | 28.00 | | | | |
| 2x08 | 14.00 | 18.00 | 16.00 | 2x15 | 28.00 | 32.00 | 30.00 | | | | |

| | | | | |
|---------------------|---------------|---------------|-------------|-----------------------|
| X2026WVS-2xXXS-9TSN | PA9T UL 94V-0 | Brass | Tin-Plated | X2026H-A |
| X2026WVS-2xXX-9T SN | PA9T UL 94V-0 | | | X2026H-A |
| PART NO | Material | Material(pin) | Finish(Pin) | Suitable XKB Terminal |

广东星坤科技股份有限公司

生 日期

文件工程章

REVISIONS

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

| DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES | DSND | DATE | SCALE: N/A | MODEL TYPE: | | |
|---------------------------------------|---------|----------|------------------------|------|------|-------------|--|-------|----------|
| | | | | DWN | DATE | VIEW: | Wire to board connector | | |
| | | | | CHKD | DATE | UNIT: mm/in | PART NO.: 2.00mm Crimp Style Connectors | | |
| | | | | APPD | DATE | SIZE: A4 | DWG NO.: X2026WVS-2xXXX-9TSXX | | |
| KKB INDUSTRIAL PRECISION CO., LIMITED | | | | | | | WEIGHT | SHEET | REVISION |
| | | | | | | | 1.0g | 1/1 | A0 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#)
[63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)
[65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#) [80.063.4001.1](#)
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-](#)
[001000](#)