
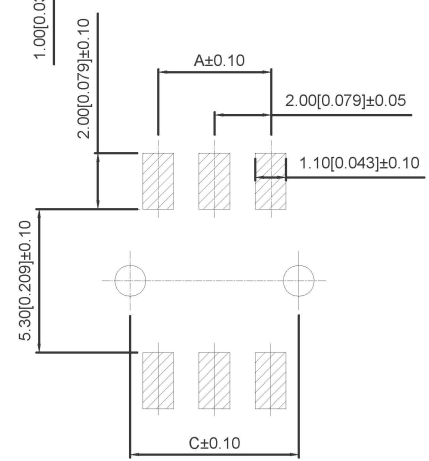
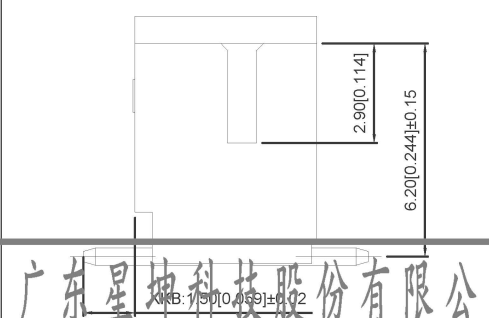



2P视图

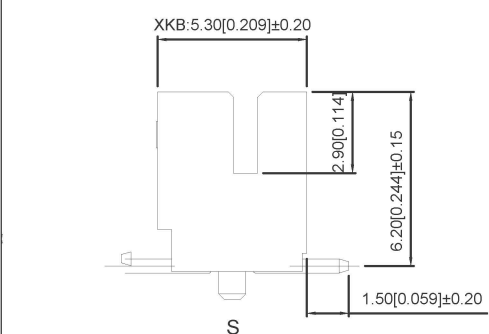

PCB LAYOUT

Specifications:
 规格:
 Voltage rating:250V AC/DC
 额定电压: 250V AC/DC
 Current rating:3A AC/DC
 额定电流: 3A AC/DC
 Withstanding voltage:800V AC/minute
 耐受电压: 800V AC/分钟
 Temperature range:-25℃~+85℃
 温度范围: -25℃~+85℃
 Insulation resistance:≥1000MΩ
 绝缘电阻: ≥1000MΩ
 Contact resistance:≤10mΩ
 接触电阻: ≤10mΩ
 After environmental testing:≤20mΩ
 环境测试后: ≤20兆欧

X2026 W V S-2xXXS-9T SN XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 1.Series No
- 2.Category:W-WAFER
- 3.Welding Board Angle:V-Straight 180°
- 4.Welding Way:S-SMT
- 5.Row No-Pin No:2xXX-2x02P~2x22P
- 6.S-With the column
- 7.Material:9T-PA9T 94V-0
- 8.Plating Category:SN-Bright Tin Plating
- 9.Color:Blank-Natural Color

| poles | Dimensions(mm) | | | poles | Dimensions(mm) | | | Poles | Dimensions(mm) | | |
|-------|----------------|-------|-------|-------|----------------|-------|-------|-------|----------------|-------|-------|
| | A | B | C | | A | B | C | | A | B | C |
| 2x02 | 2.00 | 6.00 | 4.00 | 2x09 | 16.00 | 20.00 | 18.00 | 2x16 | 30.00 | 34.00 | 32.00 |
| 2x03 | 4.00 | 8.00 | 6.00 | 2x10 | 18.00 | 22.00 | 20.00 | 2x17 | 32.00 | 36.00 | 34.00 |
| 2x04 | 6.00 | 10.00 | 8.00 | 2x11 | 20.00 | 24.00 | 22.00 | 2x18 | 34.00 | 38.00 | 36.00 |
| 2x05 | 8.00 | 12.00 | 10.00 | 2x12 | 22.00 | 26.00 | 24.00 | 2x19 | 36.00 | 40.00 | 38.00 |
| 2x06 | 10.00 | 14.00 | 12.00 | 2x13 | 24.00 | 28.00 | 26.00 | | | | |
| 2x07 | 12.00 | 16.00 | 14.00 | 2x14 | 26.00 | 30.00 | 28.00 | | | | |
| 2x08 | 14.00 | 18.00 | 16.00 | 2x15 | 28.00 | 32.00 | 30.00 | | | | |

| | | | | |
|----------------------|---------------|---------------|-------------|-----------------------|
| X2026WVS-2xXXS-9 TSN | PA9T UL 94V-0 | Brass | Tin-Plated | X2026H-A |
| X2026WVS-2xXX-9T SN | PA9T UL 94V-0 | | | X2026H-A |
| PART NO | Material | Material(pin) | Finish(Pin) | Suitable XKB Terminal |

广东星坤科技股份有限公司

生 日期

文件工程章

REVISIONS

www.xk-dg.cn www.hellokxb.com www.hellokxb.cn

| DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|------|---------|----------|------------------------|
| | | | |

| | | |
|------|------|-------------|
| DSND | DATE | SCALE: N/A |
| DWN | DATE | VIEW: |
| CHKD | DATE | UNIT: mm/in |
| APPD | DATE | SIZE: A4 |

| | | |
|--|--------------|----------------|
| MODEL TYPE: Wire to board connector | | |
| PART NO.: 2.00mm Crimp Style Connectors | | |
| DWG NO.: X2026WVS-2xXXX-9TSXX | | |
| WEIGHT 1.0g | SHEET 1/1 | REVISION A0 |

XKB INDUSTRIAL PRECISION CO., LIMITED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)