

**Specifications:**

规格:

Voltage rating: 100V AC/DC

额定电压: 100V AC/DC

Current rating: 1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage: 800V AC/minute

耐受电压: 800V AC/分钟

Temperature range: -25 °C ~ +85 °C

温度范围: -25 °C ~ +85 °C

Insulation resistance: ≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance: ≤10mΩ

接触电阻: ≤10mΩ

After environmental testing: ≤20mΩ

环境测试后: ≤20兆欧

X2081 W R-2xXX- N0 SN

① ② ③ ④ ⑤ ⑥

① Series No.



② Category: W-WAFER

③ Wedding Board Angle: R-Straight 90°

④ Row No.-Pin No.: 2xXX-2x05~20P

⑤ Material: N0-PA66 94V-0

⑥ Plating Category: Sn-Bright Tin Plating

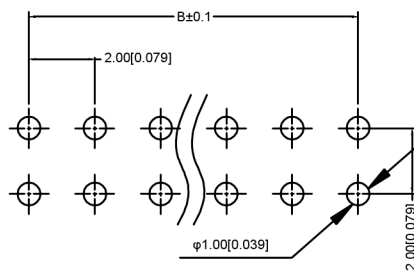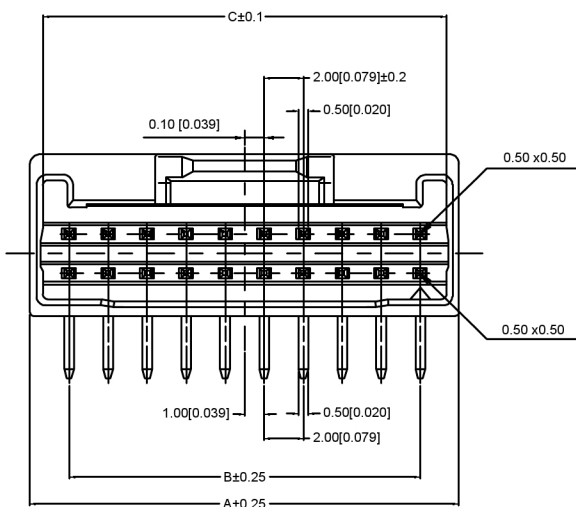

**P.C.B LAYOUT**

Poles	Dimensions(mm)				Poles	Dimensions(mm)			
	A	B	C	D		A	B	C	D
2*05	12.00	8.00	10.70	7.30	2*13	28.00	24.00	24.70	9.20
2*06	14.00	10.00	12.70	9.20	2*14	30.00	26.00	26.70	9.20
2*07	16.00	12.00	14.70	9.20	2*15	32.00	28.00	28.70	9.20
2*08	18.00	14.00	16.70	9.20	2*16	34.00	30.00	28.70	9.20
2*09	20.00	16.00	18.70	9.20	2*17	36.00	32.00	30.70	9.20
2*10	22.00	18.00	20.70	9.20	2*18	38.00	34.00	32.70	9.20
2*11	24.00	20.00	22.70	9.20	2*19	40.00	36.00	34.70	9.20
2*12	26.00	22.00	24.70	9.20	2*20	42.00	38.00	36.70	9.20

X2081WR-XX-N0SN	Nyoin 66 UL 94V-0	Brass	Tin-Plated	X2081H
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal

广东星坤科技股份有限公司

△ 姓	日期
△ 教	
△ 文	

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
					ANGULAR ±5°
					L ≤ 4 ±0.2
					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

DSND	DATE	SCALE: N/A	MODEL TYPE: X2081WR-XX-N0SN
DWN	DATE	VIEW:	PART NO.: 2.0mm Crimp Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)