

Specifications:

规格:

Voltage rating: 100V AC/DC

额定电压: 100V AC/DC

Current rating: 1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage: 800V AC/minute

耐受电压: 800V AC/分钟

Temperature range: -25 °C ~ +85 °C

温度范围: -25 °C ~ +85 °C

Insulation resistance: ≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance: ≤10mΩ

接触电阻: ≤10mΩ

After environmental testing: ≤20mΩ

环境测试后: ≤20兆欧

X2081 W R-2xXX- N0 SN

① ② ③ ④ ⑤ ⑥

① Series No.



② Category: W-WAFER

③ Wedding Board Angle: R-Straight 90°

④ Row No.-Pin No.: 2xXX-2x05~20P

⑤ Material: N0-PA66 94V-0

⑥ Plating Category: Sn-Bright Tin Plating

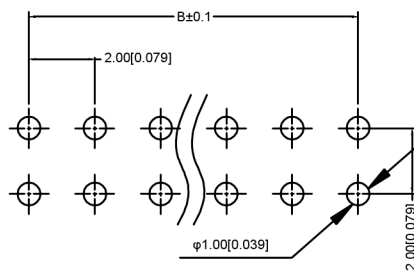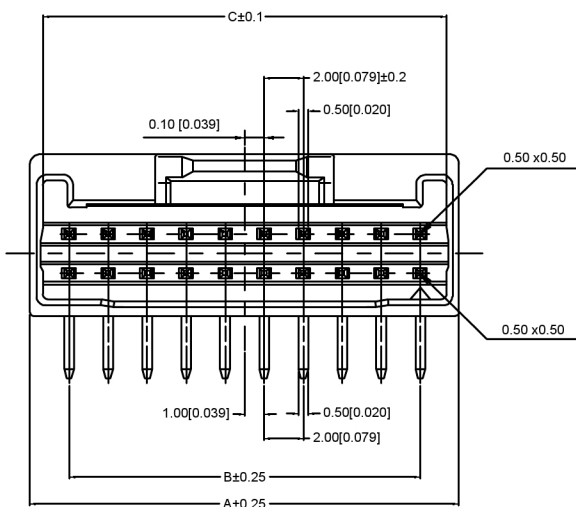

P.C.B LAYOUT

| Poles | Dimensions(mm) | | | | Poles | Dimensions(mm) | | | |
|-------|----------------|-------|-------|------|-------|----------------|-------|-------|------|
| | A | B | C | D | | A | B | C | D |
| 2*05 | 12.00 | 8.00 | 10.70 | 7.30 | 2*13 | 28.00 | 24.00 | 24.70 | 9.20 |
| 2*06 | 14.00 | 10.00 | 12.70 | 9.20 | 2*14 | 30.00 | 26.00 | 26.70 | 9.20 |
| 2*07 | 16.00 | 12.00 | 14.70 | 9.20 | 2*15 | 32.00 | 28.00 | 28.70 | 9.20 |
| 2*08 | 18.00 | 14.00 | 16.70 | 9.20 | 2*16 | 34.00 | 30.00 | 28.70 | 9.20 |
| 2*09 | 20.00 | 16.00 | 18.70 | 9.20 | 2*17 | 36.00 | 32.00 | 30.70 | 9.20 |
| 2*10 | 22.00 | 18.00 | 20.70 | 9.20 | 2*18 | 38.00 | 34.00 | 32.70 | 9.20 |
| 2*11 | 24.00 | 20.00 | 22.70 | 9.20 | 2*19 | 40.00 | 36.00 | 34.70 | 9.20 |
| 2*12 | 26.00 | 22.00 | 24.70 | 9.20 | 2*20 | 42.00 | 38.00 | 36.70 | 9.20 |

| | | | | |
|-----------------|-------------------|---------------|-------------|-----------------------|
| X2081WR-XX-N0SN | Nyoin 66 UL 94V-0 | Brass | Tin-Plated | X2081H |
| PART NO | Material | Material(pin) | Finish(pin) | Suitable XKB Terminal |

广东星坤科技股份有限公司

| | |
|-----|----|
| △ 姓 | 日期 |
| △ 教 | |
| △ 文 | |

文件工程章

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|------|-------------|------|---------|----------|------------------------|
| | | | | | ANGULAR ±5° |
| | | | | | L ≤ 4 ±0.2 |
| | | | | | 4 < L ≤ 16 ±0.3 |
| | | | | | 16 < L ≤ 63 ±0.4 |
| | | | | | L > 63 ±0.5 |

| | | | |
|---------------------------------------|------|-------------|--|
| DSND | DATE | SCALE: N/A | MODEL TYPE: X2081WR-XX-N0SN |
| DWN | DATE | VIEW: | PART NO.: 2.0mm Crimp Style Connectors |
| CHKD | DATE | UNIT: mm/in | DWG NO.: |
| APPD | DATE | SIZE: A4 | |
| XKB INDUSTRIAL PRECISION CO., LIMITED | | | WEIGHT 1.0g |
| | | | SHEET 1/1 |
| | | | REVISION A0 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#)
[63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)
[65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#) [80.063.4001.1](#)
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-](#)
[001000](#)