

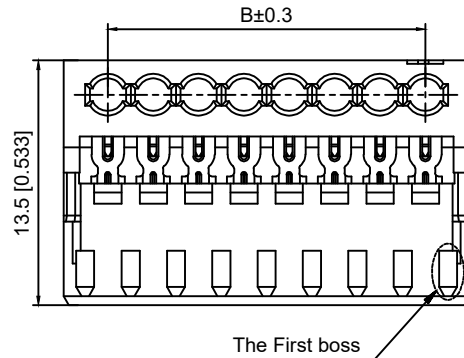


Specifications:

规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:2A AC/DC
额定电流: 2A AC/DC
Withstanding voltage:1200V AC/minute
耐受电压: 1200V AC/分钟
Temperature range:-40°C~+125°C
温度范围: -40°C~+125°C
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:10mΩ Max
接触电阻: 10mΩ Max



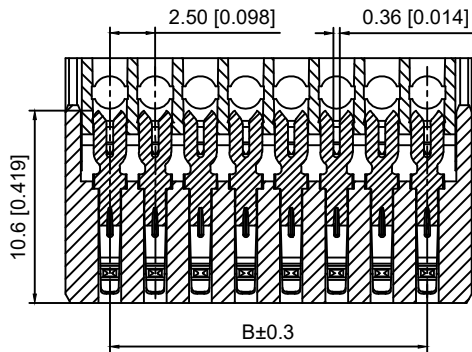


X25064 H I - XX D XX - PT SN
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- Series No
- Category:H-HSG
- Category:I-Punctured type
- Row No,Pin No:XX-02~17 Pin
- Appearance type:D Type
- Spacer bar:For example 12-Keying between pin 1 and pin 2
23-Keying between pin 2 and pin 3...When the pin number is above 10, use the letters A ,B C...A for 10,B for 11...
- Blank-No Keying
- Material:PT-PBT ;N0-PA66 UL 94V-0
- Platig:SN-Plated Tin ; V01-Gold Flash;V03-Gold 3u;
V15-Gold 15u;V30-Gold 30u

SEC:E-E

SEC:F-F

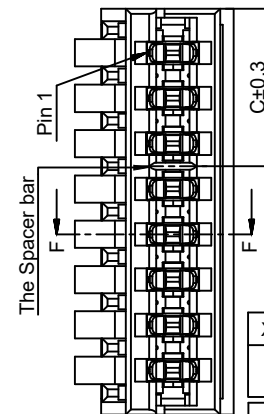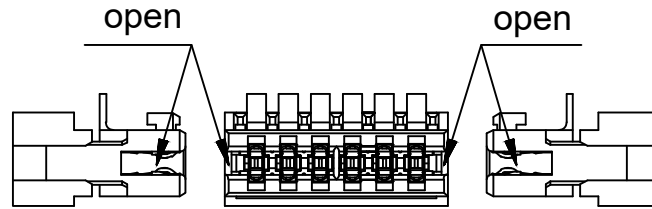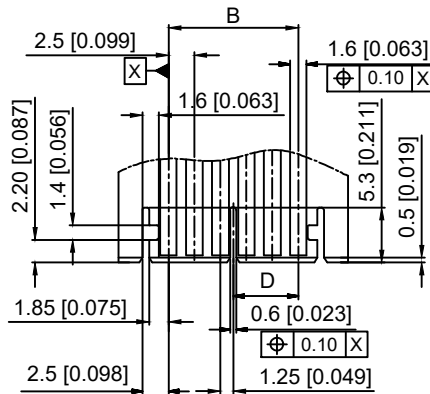

| Poles | Dimensions(mm) | | Spacer bar | | |
|-------|----------------|-------|------------|-------|-------|
| | A | B | C | D | |
| | | | 00 | / | / |
| 02 | 7.40 | 2.50 | 12 | 7.40 | 2.50 |
| 03 | 9.90 | 5.00 | 23 | 9.90 | 5.00 |
| 04 | 12.40 | 7.50 | 34 | 12.40 | 7.50 |
| 05 | 14.90 | 10.00 | 45 | 14.90 | 10.00 |
| 06 | 17.40 | 12.50 | 56 | 17.40 | 12.50 |
| 07 | 19.90 | 15.00 | 67 | 19.90 | 15.00 |
| 08 | 22.40 | 17.50 | 78 | 22.40 | 17.50 |
| 09 | 24.90 | 20.00 | 89 | 24.90 | 20.00 |
| 10 | 27.40 | 22.50 | 9A | 27.40 | 22.50 |
| 11 | 29.90 | 25.00 | AB | 29.90 | 25.00 |
| 12 | 32.40 | 27.50 | BC | 32.40 | 27.50 |
| 13 | 34.90 | 30.00 | CD | 34.90 | 30.00 |
| 14 | 37.40 | 32.50 | DE | 37.40 | 32.50 |
| 15 | 39.90 | 35.00 | EF | 39.90 | 35.00 |
| 16 | 42.40 | 37.50 | FG | 42.40 | 37.50 |
| 17 | 44.90 | 40.00 | GH | 44.90 | 40.00 |

| | | | |
|---------------------|------------|---------------|--------------------|
| X25064HI-XXDXX-PTSN | AWG24~22 | Phosphor | X25064W |
| PART NO | Wire Range | Material(Pin) | Suitable XKB Wafer |

| | | |
|------|-------------|----------------------------|
| DSND | SCALE: N/A | MODEL TYPE: |
| DWN | VIEW: | 2.5mm Pitch Rast Connector |
| CHKD | UNIT: mm/in | PART NO.: |
| APPD | SIZE: A4 | X25064HI-XXDXX-PTSN |
| | | DWG NO.: |
| | | X-X25064HI-XXDXX-PTSN |



XKB INDUSTRIAL PRECISION CO.,LIMITED

| | | |
|--------|-------|----------|
| WEIGHT | SHEET | REVISION |
| | 1/1 | A0 |

| | |
|------------------------|------|
| ANGLAR | ±5° |
| L ≤ 4 | ±0.2 |
| 4 < L ≤ 16 | ±0.3 |
| 16 < L ≤ 63 | ±0.4 |
| L > 63 | ±0.5 |
| UNSPECIFIED TOLERANCES | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[571763P](#) [59811-0000](#) [61-168618-12P](#) [D20419-211](#) [76871-1403](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [PCS-XES68MS+](#) [G38A71314B](#) [DX40-50P\(55\)](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [91-569786-35H](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDMR-29-01-S-SM-TR](#) [HDR-E14MSG1+](#) [54182-0605](#) [UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [DRA-26PC-F0R](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [ZP-4008-66L](#) [10-565995-597N](#) [10-584459-12P](#) [DX40-20P\(55\)](#) [5554841-1](#) [SM3100F14S-12P](#) [SM3106F14S-7S-LC](#) [SM3106R18-18S](#) [U90B3054061110](#) [U65-E04-4020](#) [557-262M2-06C](#) [PCS-96LFD+](#) [60-042222-02S](#) [10099439-003C-TRLF](#) [226-0348-000](#) [10137239-0021LF](#)