




**X2508 H X XX X-N0 XX**

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: H-HSG
- ③ Appearance type: Blank-ordinary
- ④ Row No.-Pin No.: XX-Single Row
- ⑤ Plug the Pin & Special No.: Blank-Ordinary
- ⑥ Material : N0-PA66 94V-0
- ⑦ Color: Blank : Natural Color ; RE- Red

■ **Specifications :**

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

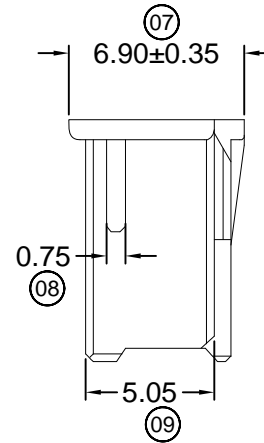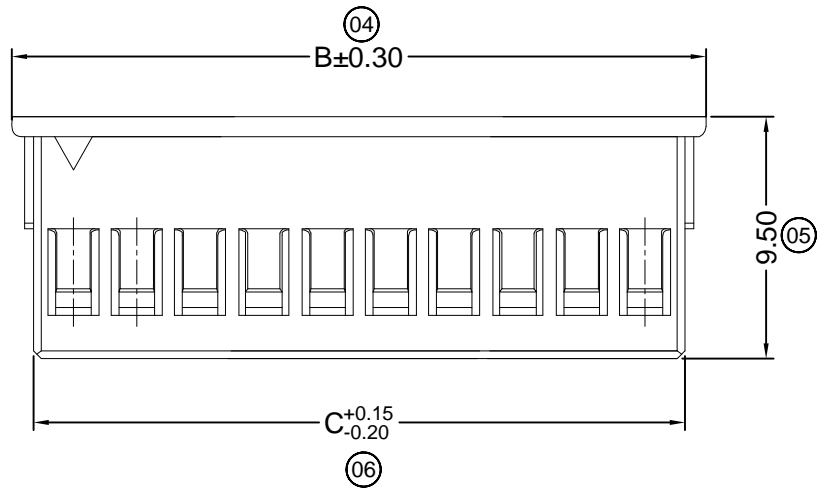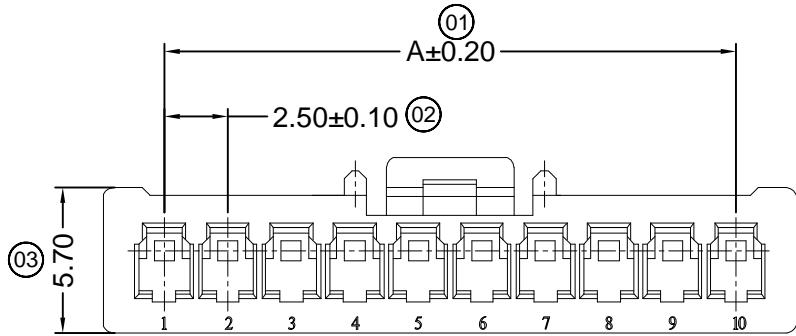

| Poles | Dimensions (mm) |       |       |
|-------|-----------------|-------|-------|
|       | A               | B     | C     |
| 02    | 2.50            | 7.30  | 5.65  |
| 03    | 5.00            | 9.80  | 8.15  |
| 04    | 7.50            | 12.30 | 10.65 |
| 05    | 10.00           | 14.80 | 13.15 |
| 06    | 12.50           | 17.30 | 15.65 |
| 07    | 15.00           | 19.80 | 18.15 |
| 08    | 17.50           | 22.30 | 20.65 |
| 09    | 20.00           | 24.80 | 23.15 |
| 10    | 22.50           | 27.30 | 25.65 |
| 11    | 25.00           | 29.80 | 28.15 |
| 12    | 27.50           | 32.30 | 30.65 |
| 13    | 30.00           | 34.80 | 33.15 |
| 14    | 32.50           | 37.30 | 35.65 |
| 15    | 35.00           | 39.80 | 38.15 |

|              |                   |                       |                       |
|--------------|-------------------|-----------------------|-----------------------|
| X2508H-XX-N0 | Nylon 66 UL 94V-0 | X2508T                | X2508W                |
| PART NO      | Material          | Suitable XKB Terminal | Suitable XKB Terminal |

For and on behalf of  
**XKB INDUSTRIAL PRECISION CO., LIMITED**  
 香港星坤工業精密有限公司

|      |             |      |         |          |                        |       |  |  |      |            |                               |       |          |
|------|-------------|------|---------|----------|------------------------|-------|--|--|------|------------|-------------------------------|-------|----------|
| △ X  |             |      |         |          | ANGULAR                | ± 5°  | DSND   |  | DATE | SCALE: N/A | MODEL TYPE:<br>X2508H-XX-N0   |       |          |
| △ X  |             |      |         |          | L ≤ 4                  | ± 0.2 | DWN  |  | DATE | VIEW:      | PART NO.:                     |       |          |
| △ X  |             |      |         |          | 4 < L ≤ 16             | ± 0.3 | CHKD   |  | DATE | UNIT: mm   | 2.50 mm Crimp Style Connector |       |          |
| MARK | DESCRIPTION | DATE | REVISED | APPROVED | 16 < L ≤ 63            | ± 0.4 | APPD   |  | DATE | SIZE: A4   | DWG NO.:                      |       |          |
|      |             |      |         |          | L > 63                 | ± 0.5 |  |  |      |            | WEIGHT                        | SHEET | REVISION |
|      |             |      |         |          | UNSPECIFIED TOLERANCES |       | <b>XKB INDUSTRIAL PRECISION CO., LIMITED</b> |  |      |            | 1.0g                          | 1/1   | A0       |

REVISIONS  
 Authorized Signature(s)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)  
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)  
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)  
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)  
[803-43-024-10-001000](#)