






TPA Type, A KEY

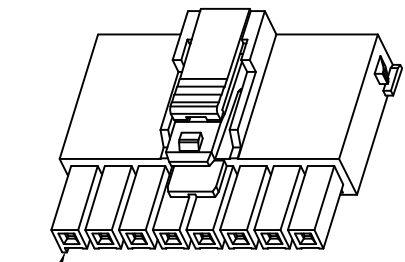




TPA Type, B KEY

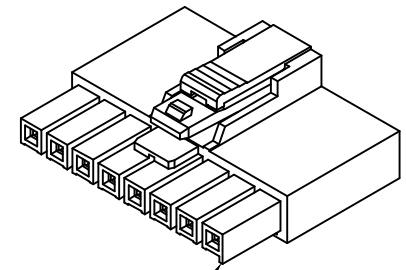

Standard, C KEY

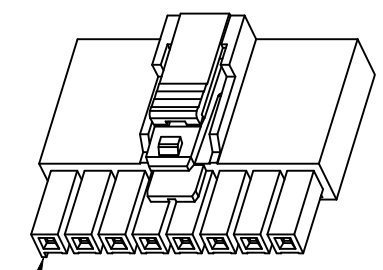

Standard, D KEY

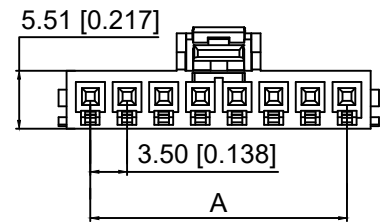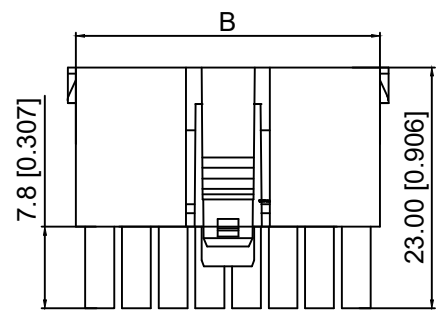

**Specifications:**  
 规格:  
 Voltage rating:400V AC/DC  
 额定电压: 400V AC/DC  
 Current rating:14A AC/DC  
 额定电流: 14A AC/DC  
 Withstanding voltage:1800V AC/minute  
 耐受电压: 1800V AC/分钟  
 Temperature range:-40℃-+105℃  
 温度范围: -40℃-+105℃  
 Insulation resistance:1000MΩ min  
 绝缘电阻: 1000MΩ Min  
 Contact resistance:10mΩ Max  
 接触电阻: 10mΩ Max

X3501 H - XX X - N0  
 ① ② ③ ④ ⑤

- 1.Series No
- 2.Category:H-HSG
- 3.Row No.Pin No:XX-02~12P
- 4.A:TPA Type, A KEY Black  
 B:TPA Type, B KEY Nature  
 C:Standard, C KEY Black  
 D:Standard, D KEY Nature
- 5.Material:N0-Nylon UL94V-0

| Poles | Dimensions |       |
|-------|------------|-------|
|       | A          | B     |
| 02    | 3.50       | 8.00  |
| 03    | 7.00       | 11.50 |
| 04    | 10.50      | 15.00 |
| 05    | 14.00      | 18.50 |
| 06    | 17.50      | 22.00 |
| 07    | 21.00      | 25.50 |
| 08    | 24.50      | 29.00 |
| 12    | 38.50      | 43.00 |

|               |          |                    |                       |
|---------------|----------|--------------------|-----------------------|
| X3501H-XXX-N0 | Nylon    | X3501W             | X3501T                |
| PART NO       | Material | Suitable XKB Wafer | Suitable XKB Terminal |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|------|-------------|------|---------|----------|------------------------|
| ΔX   |             |      |         |          | ANGLAR ±5°             |
| ΔX   |             |      |         |          | L ≤ 4 ±0.2             |
| ΔX   |             |      |         |          | 4 < L ≤ 16 ±0.3        |
|      |             |      |         |          | 16 < L ≤ 63 ±0.4       |
|      |             |      |         |          | L > 63 ±0.5            |



|      |  |             |                                            |
|------|--|-------------|--------------------------------------------|
| DSND |  | SCALE: N/A  | MODEL TYPE:<br>3.5mm Crimp Style Connector |
| DWN  |  | VIEW:       | PART NO.:<br>X3501H-XXX-N0                 |
| CHKD |  | UNIT: mm/in | DWG NO.:<br>X-X3501H-XXX-N0                |
| APPD |  | SIZE: A4    |                                            |

XKB INDUSTRIAL PRECISION CO.,LIMITED

| WEIGHT | SHEET | REVISION |
|--------|-------|----------|
|        | 1/1   | A0       |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)  
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)  
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)  
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)  
[803-43-024-10-001000](#)