
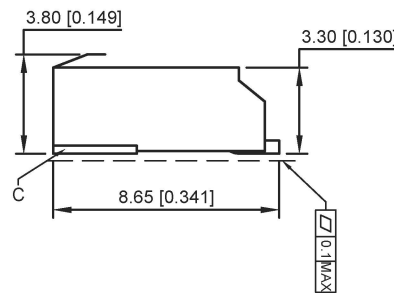



Specifications:
 Voltage rating: 600V AC/ DC
 Current rating: 1A AC/DC
 Withstanding voltage: 1800V AC/minute
 Temperature range: -25° □ ~+105° □
 Insulation resistance: ≥1000MΩ
 Contact resistance: ≤20mΩ
 After environmental testing: ≤40mΩ

X4001 W V-02 L-LP SN
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category: W-WAFER
- ③ Welding Board Angle: V-180°
- ④ Row No.-Pin No.: 02P
- ⑤ Plug the Pin & Special No.: L-With Lock
- ⑥ Material: LP-LCP 94V-0
- ⑦ Plating Category: SN-Bright Tin Plating

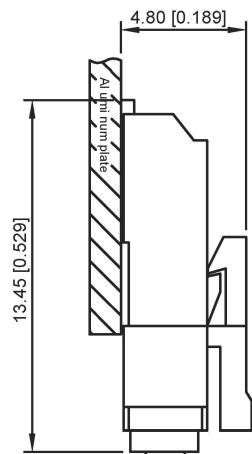

X4001WV-02L-LP	SNLCP UL 94V-0	Phosphor Bronze	Tin-Plated	Brass	Tin-Plated
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finish (Solder Tab)

广东星坤科技股份有限公司

生 日期
 文件工程章

REVISIONS	DATE	REVISED	APPROVED	DESCRIPTION

DSND	DATE	SCALE: N/A
DWN	DATE	VIEW:
CHKD	DATE	UNIT: mm/in
APPD	DATE	SIZE: A4

MODEL TYPE: X4001WV-02L-LP		
PART NO.: 4.00mm BTB Style Connectors		
DWG NO.:		
WEIGHT 1.0g	SHEET 1/1	REVISION A0

KKB INDUSTRIAL PRECISION CO., LIMITED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)