
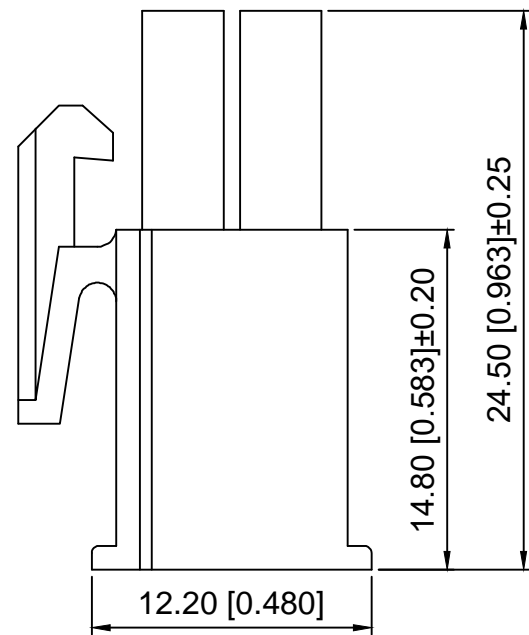


Specifications:  
 规格:  
 Voltage rating:600V AC/DC  
 额定电压: 600V AC/DC  
 Current rating:5A AC/DC  
 额定电流: 5A AC/DC  
 Withstanding voltage:1500V AC/minute  
 耐受电压: 1500V AC/分钟  
 Temperature range:-40℃-+125℃  
 温度范围: -40℃-+125℃  
 Insulation resistance:1000MΩ min  
 绝缘电阻: 1000MΩ min  
 Contact resistance:20mΩ max  
 接触电阻: 20mΩ max

X4140 H M - 2xXX - N0

- ①
- ②
- ③
- ④
- ⑤

- 1.Series No
- 2.Category:H-Housing
- 3.Housing Type:M-Male Housing
- 4.Row No.Pin No:2xXX-2x02~2x03P
- 5.Material:N0-PA66 94V-0

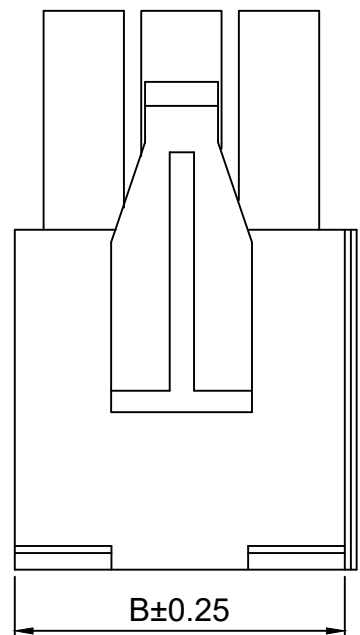

Poles	Dimensions(mm)	
	A	B
2x02	4.14	10.36
2x03	8.28	14.50

X4140HM-2xXX-N0	PA66	X4140W	X4140HF	X4140TF
PART NO	Material	Suitable XKB Wafer	Suitable XKB Housing	Suitable XKB Terminal

DSND		SCALE: N/A	MODEL TYPE: 4.14mm Crimp Style Connector
DWN		VIEW:	PART NO.: X4140HM-2xXX-N0
CHKD		UNIT: mm/in	DWG NO.: X-X4140HM-2xXX-N0
APPD		SIZE: A4	
		WEIGHT	SHEET
			REVISION
			1/1
			A0



XKB INDUSTRIAL PRECISION CO.,LIMITED

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					ANGLAR ±5°
Δx					L ≤ 4 ±0.2
Δx					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#)  
[PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#)  
[ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1746952](#) [1760336](#) [1800272](#) [1809474](#) [1855000000](#) [19346](#) [1946309](#) [1950227](#) [1973592](#) [19892](#) [2-](#)  
[1546857-6](#) [25.320.4053.1](#) [25.320.4553.9](#) [25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#)  
[SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#)