
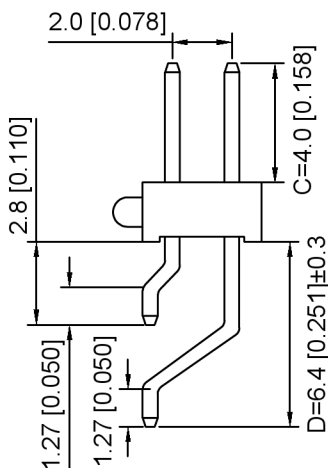


X4621WRS-2xXXI-C40D64

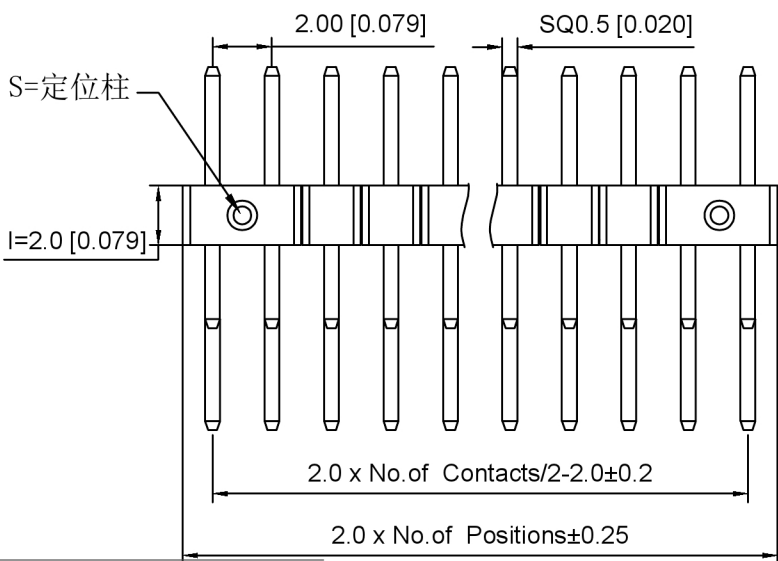

X4621WRS-2xXXIS-C40D64

Specifications:

规格:

- Voltage rating: 250V AC/DC
- 额定电压: 250V AC/DC
- Current rating: 2A AC/DC
- 额定电流: 2A AC/DC
- Withstanding voltage: 500V AC/minute
- 耐受电压: 500V AC/分钟
- Temperature range: -40°C - +105°C
- 温度范围: -40°C - +105°C
- Insulation resistance: 1000M $\Omega$  min
- 绝缘电阻: 1000M $\Omega$  Min
- Contact resistance: 20M $\Omega$  Max
- 接触电阻: 20M $\Omega$  Max
- Plating Category: 1U" Gold
- 镀层: 1U" Gold
- Reflow soldering temperature: 260 $\pm$ 5°C, 10S
- 回流焊温度: 260 $\pm$ 5°C, 10S

X4621 W R S - 2xXX I S - C40 D64

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

1. Series No
2. Category: W-Wafer
3. Welding Board Angle: R-Stright 90°
4. Welding Way: S-SMT
5. Row No. Pin No: 2xXX Pin
6. Plastic Height: I=2.0mm
7. Category: S-With positioning column
8. Pin length: C=4.0mm
9. Pin length: D=6.4mm

X4621WRS-2xXXI-C40D64	PA6T	Brass	X4621F
X4621WRS-2xXXIS-C40D64			
PART NO	Material	Material(Pin)	Suitable XKB Female

DSND		SCALE: N/A	MODEL TYPE: 2.0mm BTB Connector
DWN		VIEW:	PART NO.: X4621WRS-2xXXIS-C40D64
CHKD		UNIT: mm/in	DWG NO.: X-X4621WRS-2xXXIS-C40D64
APPD		SIZE: A4	WEIGHT SHEET REVISION 1/1 A0



XKB INDUSTRIAL PRECISION CO., LIMITED

ANGLAR	$\pm 5^\circ$
$L \leq 4$	$\pm 0.2$
$4 < L \leq 16$	$\pm 0.3$
$16 < L \leq 63$	$\pm 0.4$
$L > 63$	$\pm 0.5$
UNSPECIFIED TOLERANCES	

广东星坤科技股份有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED
文件	工程	章		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)