

3D图示 (参考)




■ Specifications.

- Voltage rating: 250V AC/DC
- Current rating: 5A AC/DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25 °C ~ +85 °C
- Insulation resistance: 1000mΩ Min
- Contact resistance: 20mΩ Max
- Material: Nylon66 UL94V-0

X5080 H -XX- N0

① ② ③ ④

- ① Series No.
- ② Category : H-HSG
- ③ Row No.Pin No.XX-02-12
- ④ Material: N0-Nylon66 94V-0

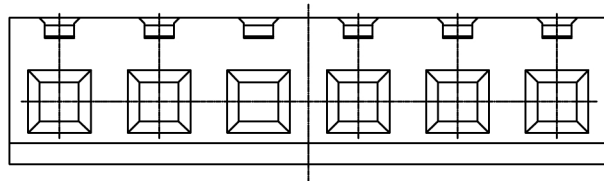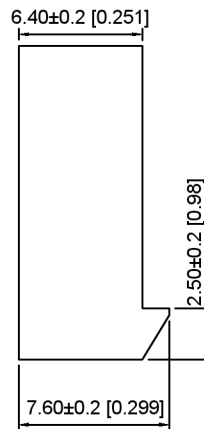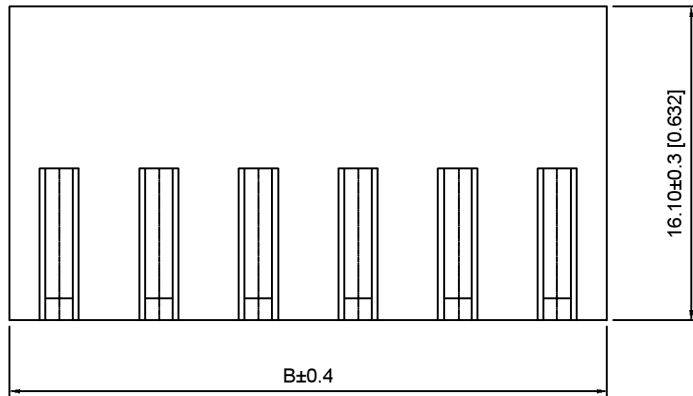

POLES	A	B
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.40
6	25.40	30.48
7	30.48	35.56
8	35.56	40.64
9	40.64	45.72
10	45.72	50.80
11	50.80	55.88
12	55.88	60.96

X5080H-XX-N0	Nylon66 UL 94V-0	X5080T	X5080W
PART NO	Material	Suitable XKB Terminal	Suitable XKB Wafer

广东星坤科技股份有限公司

生 日期  
 Δ× 效  
 Δ× 期

MARK 文件工程章 DESCRIPTION

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5



XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE: 5.08mm Crimp Style Connectors
DWN	VIEW:	PART NO.: X5080H-XX-N0
CHKD	UNIT: mm/in	DWG NO.: X-X5080H-XX-N0
APPD	SIZE: A4	WEIGHT SHEET REVISION 1/1 A0

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XKB](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)  
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)  
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)  
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)  
[803-43-024-10-001000](#)